
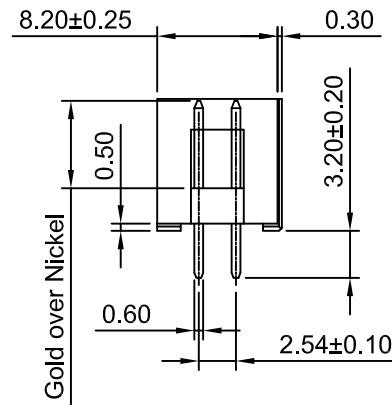
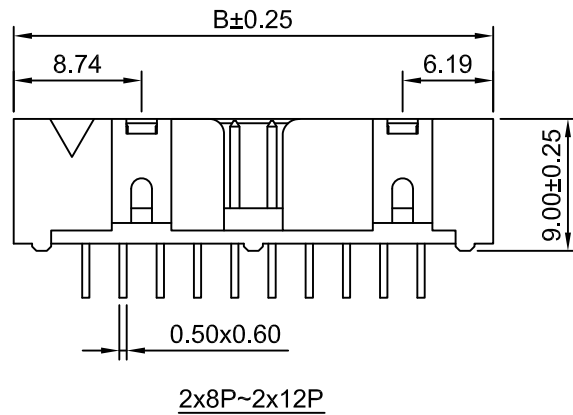
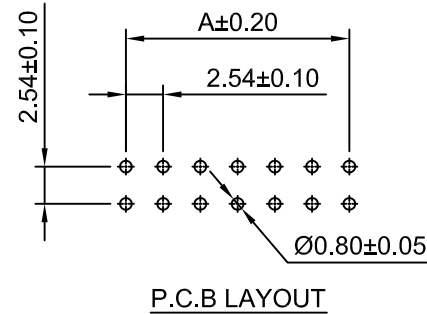


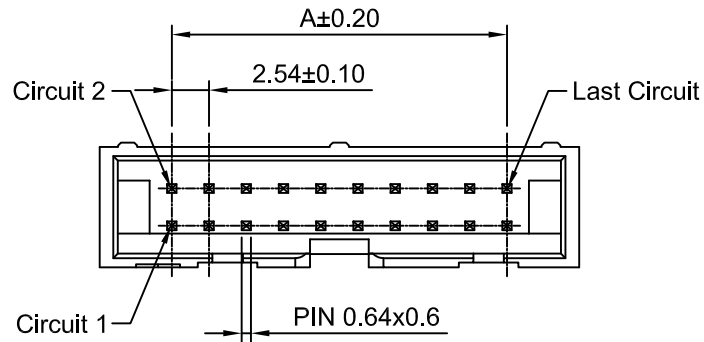


SPECIFICATIONS:

Current Rating: 3A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 20mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 1500V AC/minute
Pin Material: Brass/Gold over Nickel
Material: PBT,UL94V-0(Black)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2x5P	10.16	20.00	2x15P	35.56	45.40
2x7P	15.24	25.08	2x17P	40.64	50.48
2x8P	17.78	27.62	2x20P	48.26	58.10
2x10P	22.86	32.70	2x25P	60.96	70.80
2x12P	27.94	37.78	2x30P	73.66	83.50
2x13P	30.48	40.32	2x32P	78.74	88.58

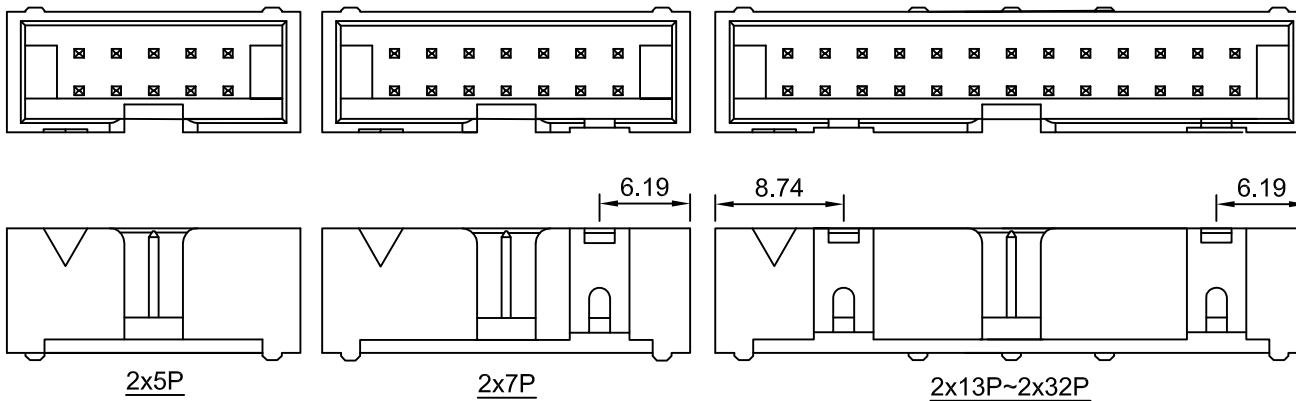

Ordering Information:

A2547WVA-N-2xXP - *** - ** - ***
1 2 3 4

- Part No.
- Material:
(blank):PBT,UL94V-0
6T:Nylon 6T,UL94V-0
GWT:PBT,UL94V-0,GWT 750°C
- Color:
(blank):Black
GY:Gray
BL:Blue
- Finish:
(blank):Gold over Nickel(1u")
G15:Gold over Nickel(15u")
G30:Gold over Nickel(30u")
T:Tin over Nickel

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet
mm	2:1	1 of 1

Draw By:	Approved :
Dlankul Wan	Jack Yin

General Tolerance	
A3	CHANGE THE DRAWING
A2	CHANGE THE DRAWING
A1	Change the size
REV	DESCRIPTION

Title :
2.54mm Pitch
Right-Angle Box Header

DRAW NO : A2547WVA-N-2xXP
REV A3