




Odering Information:
 A2547WVD-2xXP - ** - *** - *
 1 2 3 4

- 1.Part No.
- 2.Color:
 (blank):Black
 GY:Gray
- 3.Finish:
 (blank):Gold over Nickel(1u")
 G15:Gold over Nickel(15u")
 G30:Gold over Nickel(30u")
 T:Tin over Nickel
- 4.Size(L):
 (blank):14.55mm
 L:10.65mm

SPECIFICATIONS:

Current Rating: 3A AC,DC
 Voltage Rating: 250V AC,DC
 Temperature Range: -40°C ~ +105°C
 Contact Resistance: 20mΩ Max
 Insulation Resistance: 1000MΩ Min
 Withstanding Voltage: 1500V AC/minute
 Pin Material: Brass/Gold over Nickel
 Material: PBT,UL94V-0(Black)

Ordering Information & Dimensions

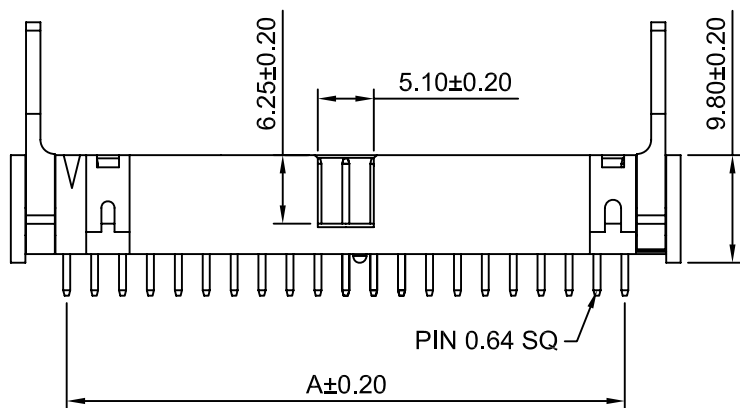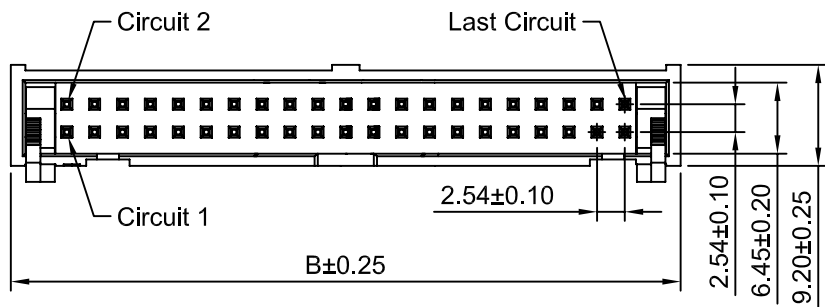

| Circuits | Dimensions(mm) | | Circuits | Dimensions(mm) | |
|----------|----------------|-------|----------|----------------|-------|
| | A | B | | A | B |
| 2x3P | 5.08 | 12.70 | 2x18P | 43.18 | 50.80 |
| 2x4P | 7.62 | 15.24 | 2x19P | 45.72 | 53.34 |
| 2x5P | 10.16 | 17.78 | 2x20P | 48.26 | 55.88 |
| 2x6P | 12.70 | 20.32 | 2x21P | 50.80 | 58.42 |
| 2x7P | 15.24 | 22.86 | 2x22P | 53.34 | 60.96 |
| 2x8P | 17.78 | 25.40 | 2x23P | 55.88 | 63.50 |
| 2x9P | 20.32 | 27.94 | 2x24P | 58.42 | 66.04 |
| 2x10P | 22.86 | 30.48 | 2x25P | 60.96 | 68.58 |
| 2x11P | 25.40 | 33.02 | 2x26P | 63.50 | 71.12 |
| 2x12P | 27.94 | 35.56 | 2x27P | 66.04 | 73.66 |
| 2x13P | 30.48 | 38.10 | 2x28P | 68.58 | 76.20 |
| 2x14P | 33.02 | 40.64 | 2x29P | 71.12 | 78.74 |
| 2x15P | 35.56 | 43.18 | 2x30P | 73.66 | 81.28 |
| 2x16P | 38.10 | 45.72 | 2x31P | 76.20 | 83.82 |
| 2x17P | 40.64 | 48.26 | 2x32P | 78.74 | 86.36 |

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

| | | |
|----------|------------|--------|
| Unit | Scale | Sheet |
| mm | 1.5:1 | 1 of 1 |
| Draw BY: | Approved : | |
| Tony Su | Jack Yin | |

Title :
2.54mm Pitch
180° Box Header

| | | |
|-----|-------------|------------|
| A0 | NEW RELEASE | 2018.08.24 |
| REV | DESCRIPTION | DATE |

| | |
|-------------------|--------|
| General Tolerance | |
| x.xx±0.25 | ANGLE± |
| x.xxx±0.20 | |
| x.xxxx±0.15 | |

DRAW NO : A2547WVD-2xXP
 REV A0