

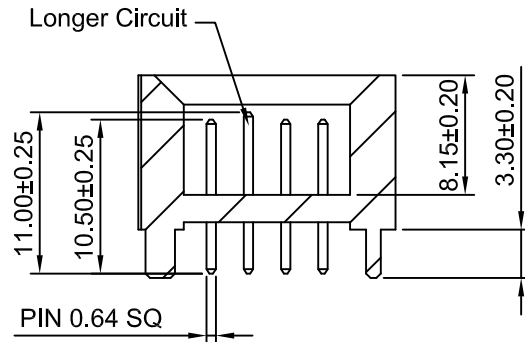
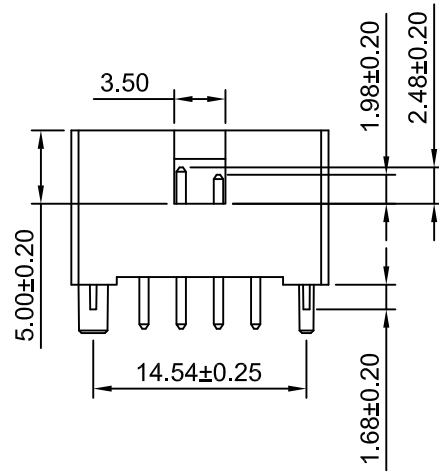
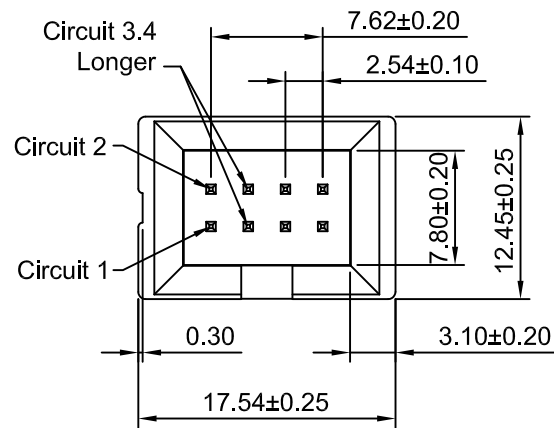






Ordering Information:
A2547WVI-F-2x4P - ** - L3.4 - *** - D30
1 2 3 4

- 1.Part NO.
- 2.Finish:
(Blank): Tin over Nickel
G: Gold over Nickel
- 3.Longer Circuit:
L4: 2x3P,Circuit 4,L=11.00mm;other Circuits,L=10.50mm.
L6: 2x4P,Circuit 6,L=11.00mm;other Circuits,L=10.50mm.
L3.4: 2x4P,Circuit 3.Circuit 4,L=11.00mm;other Circuits,L=10.50mm.
- 4.Packing:
(Blank): Tray
CRE: Tape & Reel with cap

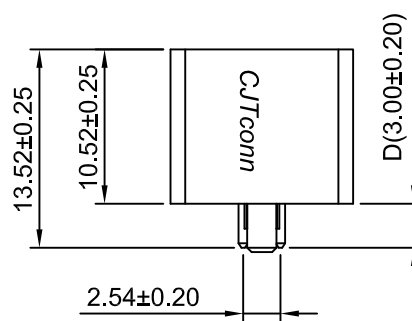

WITH CAP

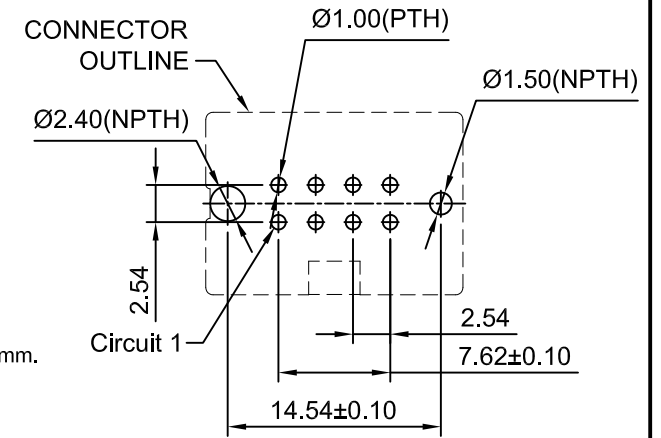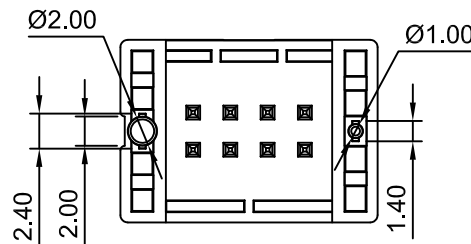

P.C.B LAYOUT (TOP VIEW)
TOLERANCE: ±0.05

SPECIFICATIONS:

Current Rating: 5A AC,DC (MAX)
Voltage Rating: 250V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 20mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 1500V AC/minute
Pin Material: Phosphor Bronze
Material: Nylon 9T, UL94V-0(Black)

CJTconn CHANGJIANG CONNECTORS CO.,LTD.			
Unit	Scale	Sheet	TITLE
mm	2:1	1 of 1	2.54mm PITCH VERTIACL DIP HEADER
DRWN	CHKD	APPR	
Wenmin Luo	Diankui Wan	Jack Yin	
General Tolerances		THIRD ANGLE PROJECTION	
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°			DRAWING NO.
			A2547WVI-F-2x4P-L3.4-D30
			REV A1