


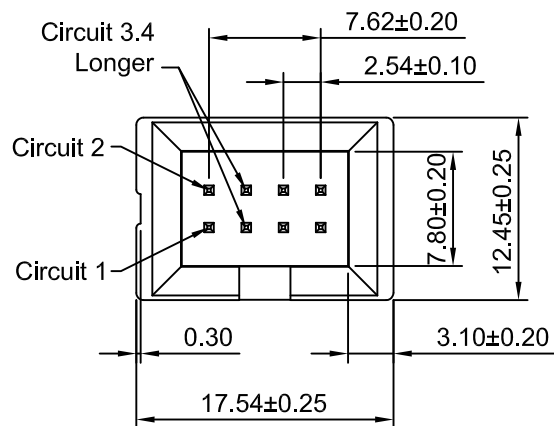

Ordering Information:
A2547WVI-F-2x4P - ** - L3.4 - ***
1 2 3 4

1.Part NO.

2.Finish:

(Blank): Tin over Nickel

G: Gold over Nickel

3.Longer Circuit:

L4: 2x3P, Circuit 4, L=11.30mm; other Circuits, L=10.80mm.


L6: 2x4P, Circuit 6, L=11.30mm; other Circuits, L=10.80mm.

L3.4: 2x4P, Circuit 3, Circuit 4, L=11.30mm; other Circuits, L=10.80mm.





4.Packing:

(Blank): Tray


CRE: Tape & Reel with cap

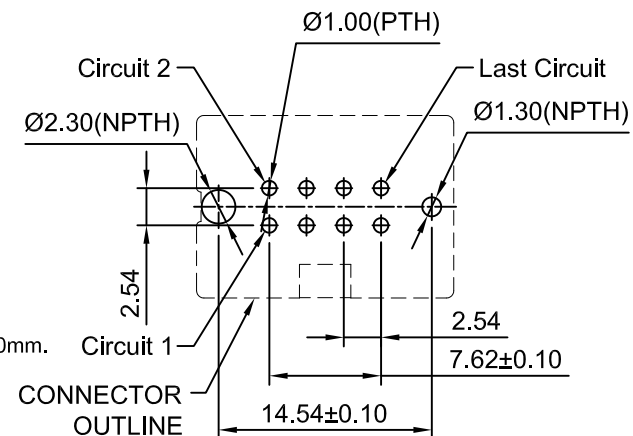

P.C.B LAYOUT(TOP VIEW)
TOLERANCE:±0.05

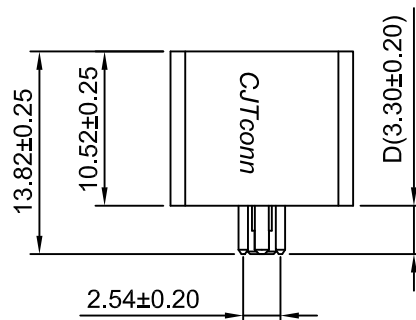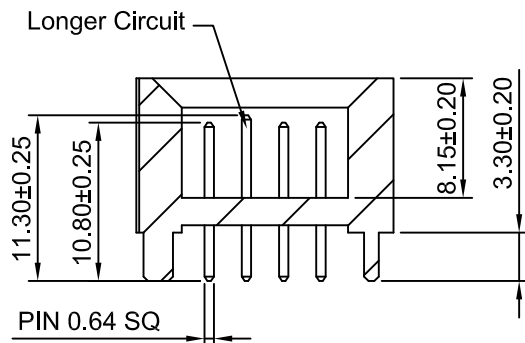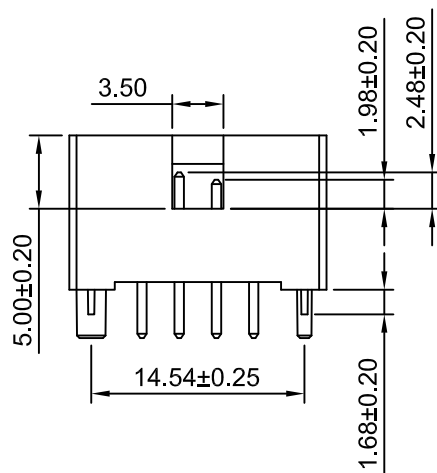

WITH CAP

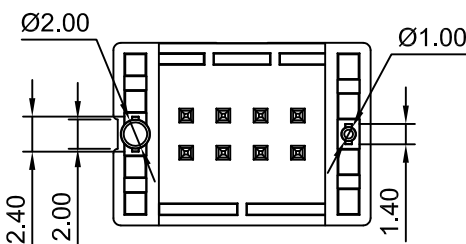

SPECIFICATIONS:

Current Rating: 5A AC,DC (MAX)

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 20mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1500V AC/minute

Pin Material: Phosphor Bronze

Material: Nylon 9T, UL94V-0(Black)

CJTconn CHANGJIANG CONNECTORS CO.,LTD.			
Unit	Scale	Sheet	TITLE
mm	2:1	1 of 1	
DRWN	CHKD	APPR	
Haisen Li	Diankui Wan	Jack Yin	
General Tolerances			THIRD ANGLE PROJECTION
A1	CHANGE THE DRAWING	2022.02.21	
A0	NEW RELEASE	2022.02.09	
REV	DESCRIPTION	DATE	
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°			
DRAWING NO.			REV
A2547WVI-F-2x4P-L3.4			A1

2.54mm PITCH
VERTIACL DIP HEADER

A2547WVI-F-2x4P-L3.4