

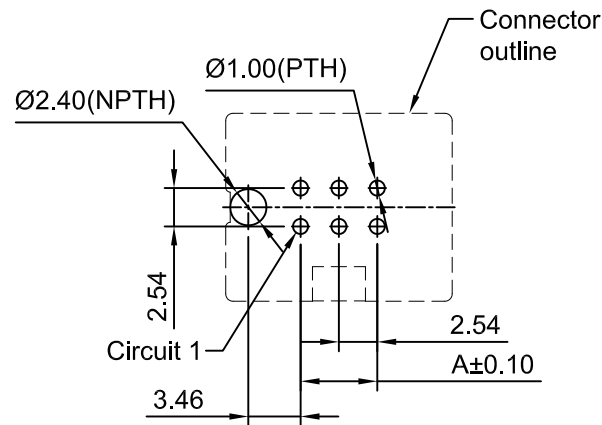
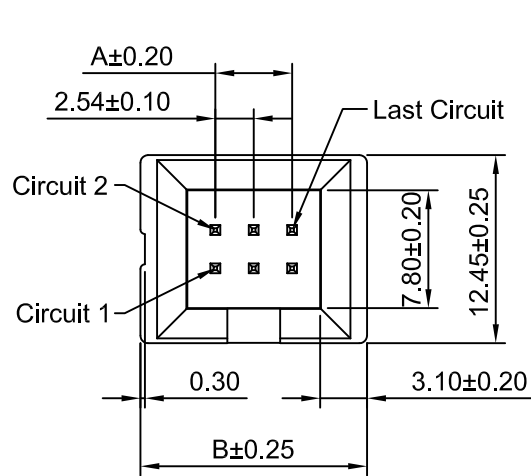

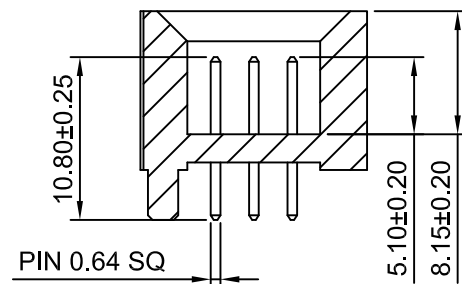



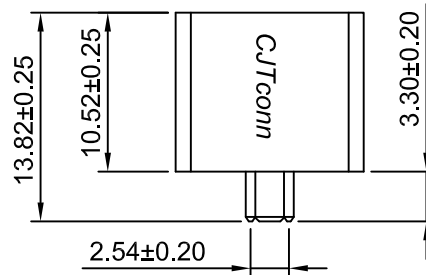

P.C.B LAOUT (TOP VIEW)
TOLERANCE:±0.05

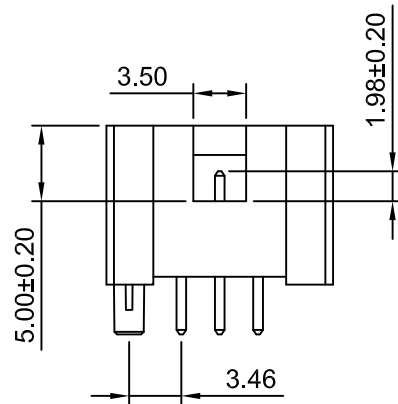

Ordering Information:

A2547WVI-F1-2xXP-HCS - *** 1 2 3

1.Part NO.

2.Finish:

(Blank): Tin over Nickel

G: Gold over Nickel

G15:Gold over Nickel(15u")

G30:Gold over Nickel(30u")

T:Tin over Nickel

3.Packing:

(Blank): Tray

CRE: Tape & Reel with cap

SPECIFICATIONS:

Current Rating: 5A AC,DC (MAX)

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 20mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1500V AC/minute

Pin Material: Copper Alloy/Tin over Nickel

Material: Nylon 9T,UL94V-0(Black)

Ordering Information & Dimensions

Part NO.	Dimensions(mm)	
	A	B
A2547WVI-F1-2x2P-HCS	2.54	12.46
A2547WVI-F1-2x3P-HCS	5.08	15.00
A2547WVI-F1-2x4P-HCS	7.62	17.54
A2547WVI-F1-2x5P-HCS	10.16	20.08
A2547WVI-F1-2x6P-HCS	12.70	22.62
A2547WVI-F1-2x7P-HCS	15.24	25.16
A2547WVI-F1-2x8P-HCS	17.78	27.70
A2547WVI-F1-2x9P-HCS	20.32	30.24
A2547WVI-F1-2x10P-HCS	22.86	32.78

CJTconn CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE	
mm	2:1	1 of 1	2.54mm PITCH VERTICAL DUAL ROW DIP WAFER	
DRAWN	CHK'D	APPR		
Haisen Li	Diankui Wan	Jack Yin	DRAWING NO.	
General Tolerances			A2547WVI-F1-2xXP-HCS	
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°			REV A3	

A3	CHANGE THE DRAWING	2022.08.23
A2	MODIFY DRAWING	2022.07.20
A1	CHANGE THE DRAWING	2022.05.05
A0	NEW RELEASE	2018.05.16
REV	DESCRIPTION	DATE