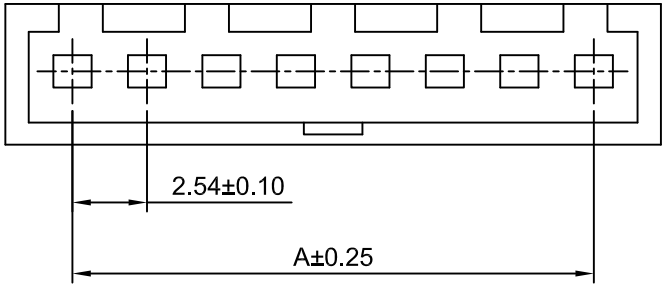

Ordering Information:

A2549HA-XP - ***
1 2

1.Part No.
2.Material:
(blank): PBT,UL94V-0(Black)
GWT: Nylon 66,UL94V-0(Beige), IEC 60335-1,5th Edition Glow Wire Capable.
LCP: LCP,UL94V-0(Beige)



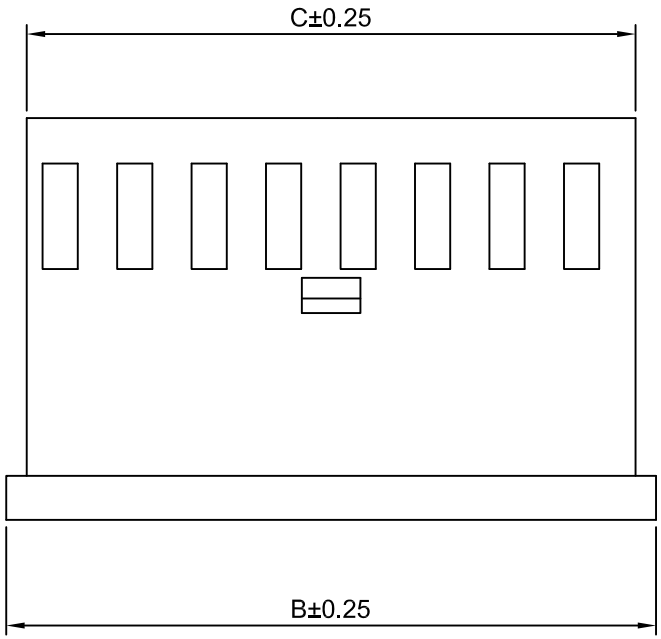

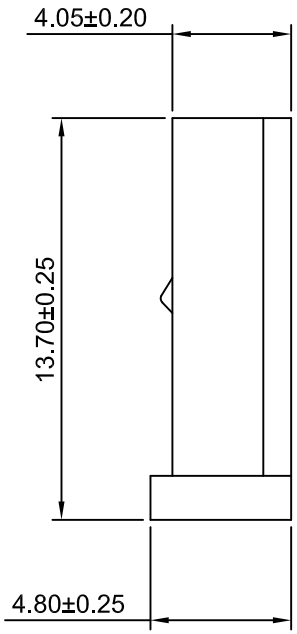

SPECIFICATIONS:
Current Rating: 3A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 20mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 1000V AC/minute
Material: PBT,UL94V-0

Ordering Information & Dimensions

Part No.	Dimensions(mm)		
	A	B	C
A2549H-2P	2.54	7.12	5.60
A2549H-4P	7.62	12.20	10.68
A2549H-6P	12.70	17.28	15.76
A2549H-8P	17.78	22.36	20.84
A2549H-9P	20.32	24.84	23.38
A2549H-10P	22.86	27.44	25.92
A2549H-12P	27.94	32.52	31.00
A2549H-14P	33.02	37.60	36.08
A2549H-15P	35.56	41.08	38.62
A2549H-16P	38.10	42.68	41.16
A2549H-18P	43.18	47.76	46.24
A2549H-20P	48.26	52.84	51.32
A2549H-22P	53.34	57.92	56.40

REV	DESCRIPTION	DATE
A2	CHANGE THE DRAWING	2023.01.31
A1	ADD THE INFORMATION	2020.05.23
A0	NEW RELEASE	2010.10.09

CJTconn CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet
mm	4:1	1 of 1
DRN Chengbiao Ye	CHK DianKui Wan	APVD Jack Yin

General Tolerance
x.x±0.25
x.xx±0.20
x.xxx±0.15
ANGLES ±1°

THIRD ANGLE PROJECTION

TITLE
2.54mm PITCH HOUSING

DRAWING NO
A2549HA-XP

REV
A2