
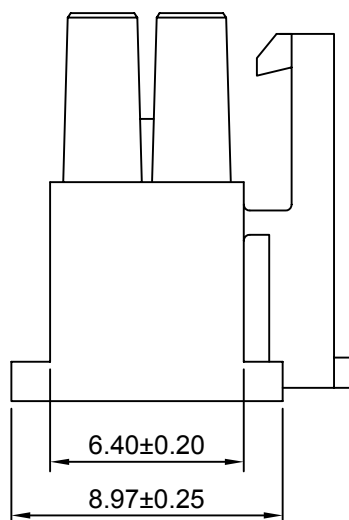
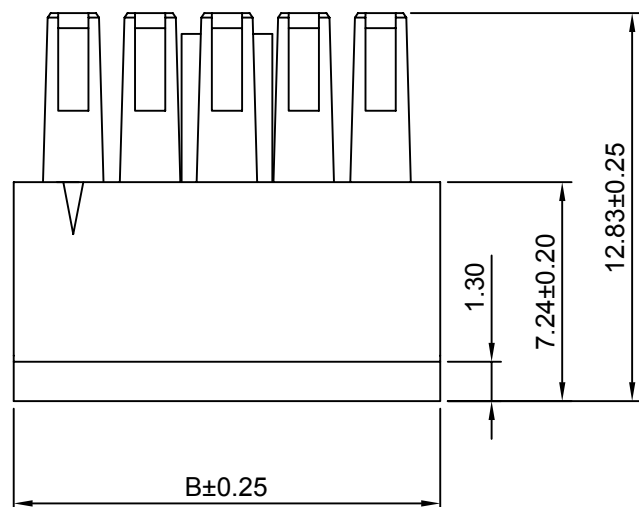


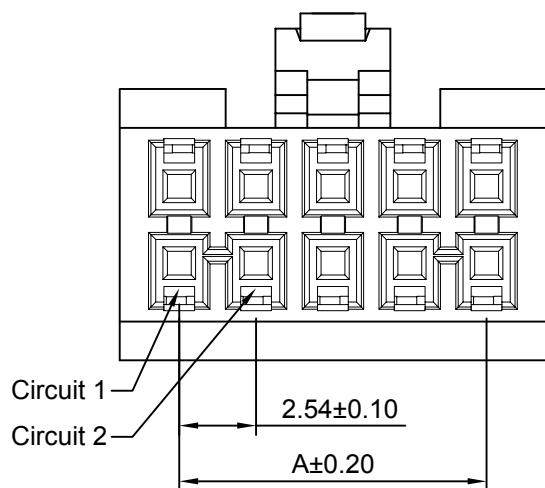

SPECIFICATIONS:

Current Rating: 3A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 20mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1000V AC/minute

Material: Nylon 66,UL94V-0(White)

Ordering Information & Dimensions

8.26

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2x2P	2.54	6.48	2x14P	33.02	36.96
2x3P	5.08	9.02	2x15P	35.56	39.50
2x4P	7.62	11.56	2x16P	38.10	42.04
2x5P	10.16	14.10	2x17P	40.64	44.58
2x6P	12.70	16.64	2x18P	43.18	47.12
2x7P	15.24	19.18	2x19P	45.72	49.66
2x8P	17.78	21.72	2x20P	48.26	52.20
2x9P	20.32	24.26	2x21P	50.80	54.74
2x10P	22.86	26.80	2x22P	53.34	57.28
2x11P	25.40	29.34	2x23P	55.88	59.82
2x12P	27.94	31.88	2x24P	58.42	62.36
2x13P	30.48	34.42	2x25P	60.96	64.90

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet
mm	4:1	1 of 1

Draw BY:

Tony Su

Approved :

Jack Yin

Title :

2.54mm PITCH

Dual Row HOUSING

General Tolerance

x.xx±0.25
x.xx±0.20
x.xxx±0.15

ANGLE±

DRAW NO : A2549HI-2xXP-K

REV
A0

REV	DESCRIPTION	DATE
A0	NEW RELEASE	2018.03.19