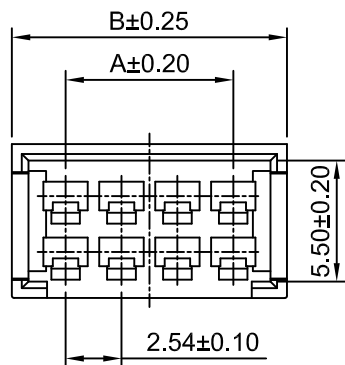


Ordering Information:

A2549HM-2xXP - ***
1 2

1.Part NO.

2.Size(H):

(Blank):Nylon 66,UL94V-0

GWT:Nylon 66,UL94V-0(Beige),IEC 60335-1,5th Edition

Glow Wire Capable.

SPECIFICATIONS:

Current Rating: 3A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 20mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1000V AC/minute

Material: Nylon 66,UL94V-0(Black)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2x2P	2.54	7.42	2x12P	27.94	32.82
2x3P	5.08	9.96	2x13P	30.48	35.36
2x4P	7.62	12.50	2x14P	33.02	37.90
2x5P	10.16	15.04	2x15P	35.56	40.44
2x6P	12.70	17.58	2x16P	38.10	42.98
2x7P	15.24	20.12	2x17P	40.64	45.52
2x8P	17.78	22.66	2x18P	43.18	48.06
2x9P	20.32	25.20	2x19P	45.72	50.06
2x10P	22.86	27.74	2x20P	48.26	53.14
2x11P	25.40	30.28			

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet
mm	3:1	1 of 1
DRAWN	CHK'D	APPR
Chengbiao Ye	Diankui Wan	Jack Yin

2.54mm PITCH
Housing

General Tolerances

x.xx±0.25
x.xxx±0.20
x.xxxx±0.15
ANGLES ±1°

THIRD ANGLE PROJECTION



DRAWING NO.

A2549HM-2xXP

REV
A1

REV	DESCRIPTION	DATE
A1	CHANGE THE DRAWING	2023.01.31
A0	NEW RELEASE	2015.07.01