
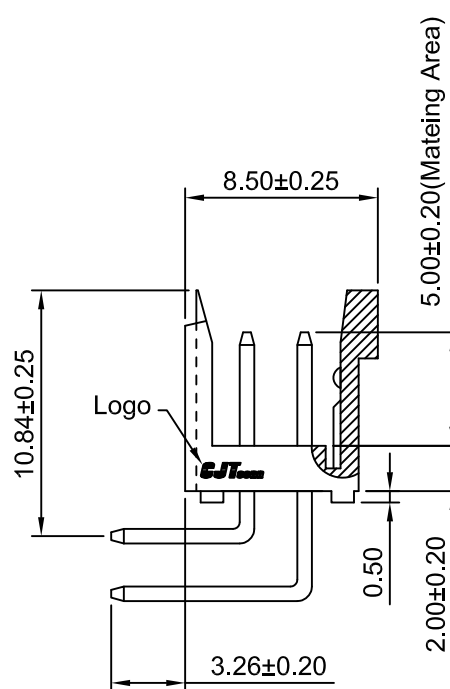
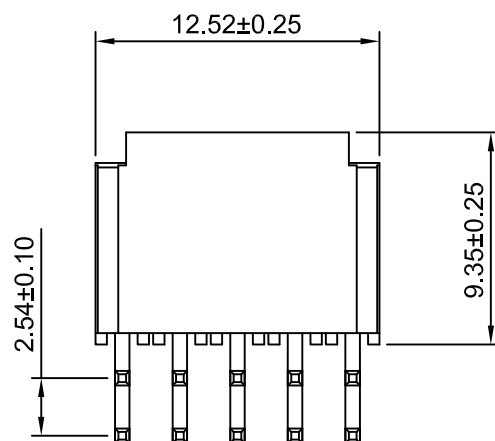
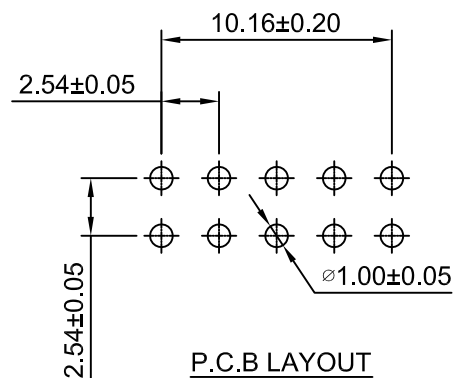


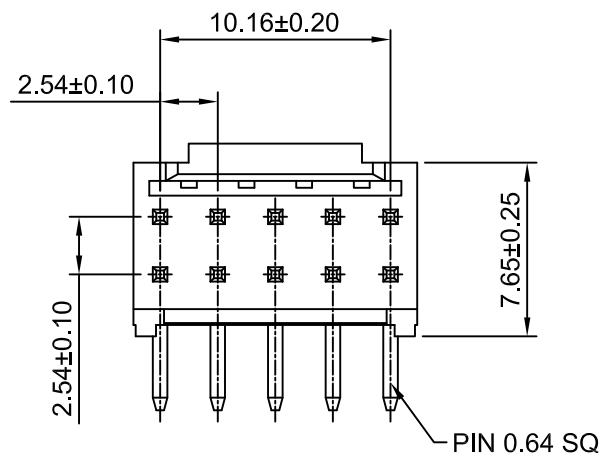

Ordering Information:

A2549WRK-N-2x5P - *** - ** - ** - ***
1 2 3 4 5

1.Part No.

2.Color:

(blank):Blue

BK:Black

3.Finish:

(blank):Tin over Nickel

G:Gold-flash

G30:30µin (0.76µm) MIN.Select Gold(Mating Area)

100µin (2.54µm) MIN.Select Tin

4.Packing:

RE: Tape & Reel

CRE: Tape & Reel with Cap

5.Logo & Marking:

(blank):With Mark

NK:Without Mark

SPECIFICATIONS:

Current Rating: 3A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 20mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1000V AC/minute

Pin Material: Brass/Tin over Nickel

Material: Nylon 66+30%G.F,UL94V-0 (Blue)

Suitable for Reflow soldering: 265°C/10s

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit		Scale		Sheet		Title : 2.54mm Pitch	
mm		3:1		1 of 1			
Draw By:			Approved :			Dual Row 90° Wafer	
Diankui Wan			Jack Yin				
General Tolerance							
x.x±0.25		PROJECT 					
x.xx±0.20							
x.xxx±0.15							
DRAW NO : A2549WRK-N-2x5P						REV A1	