


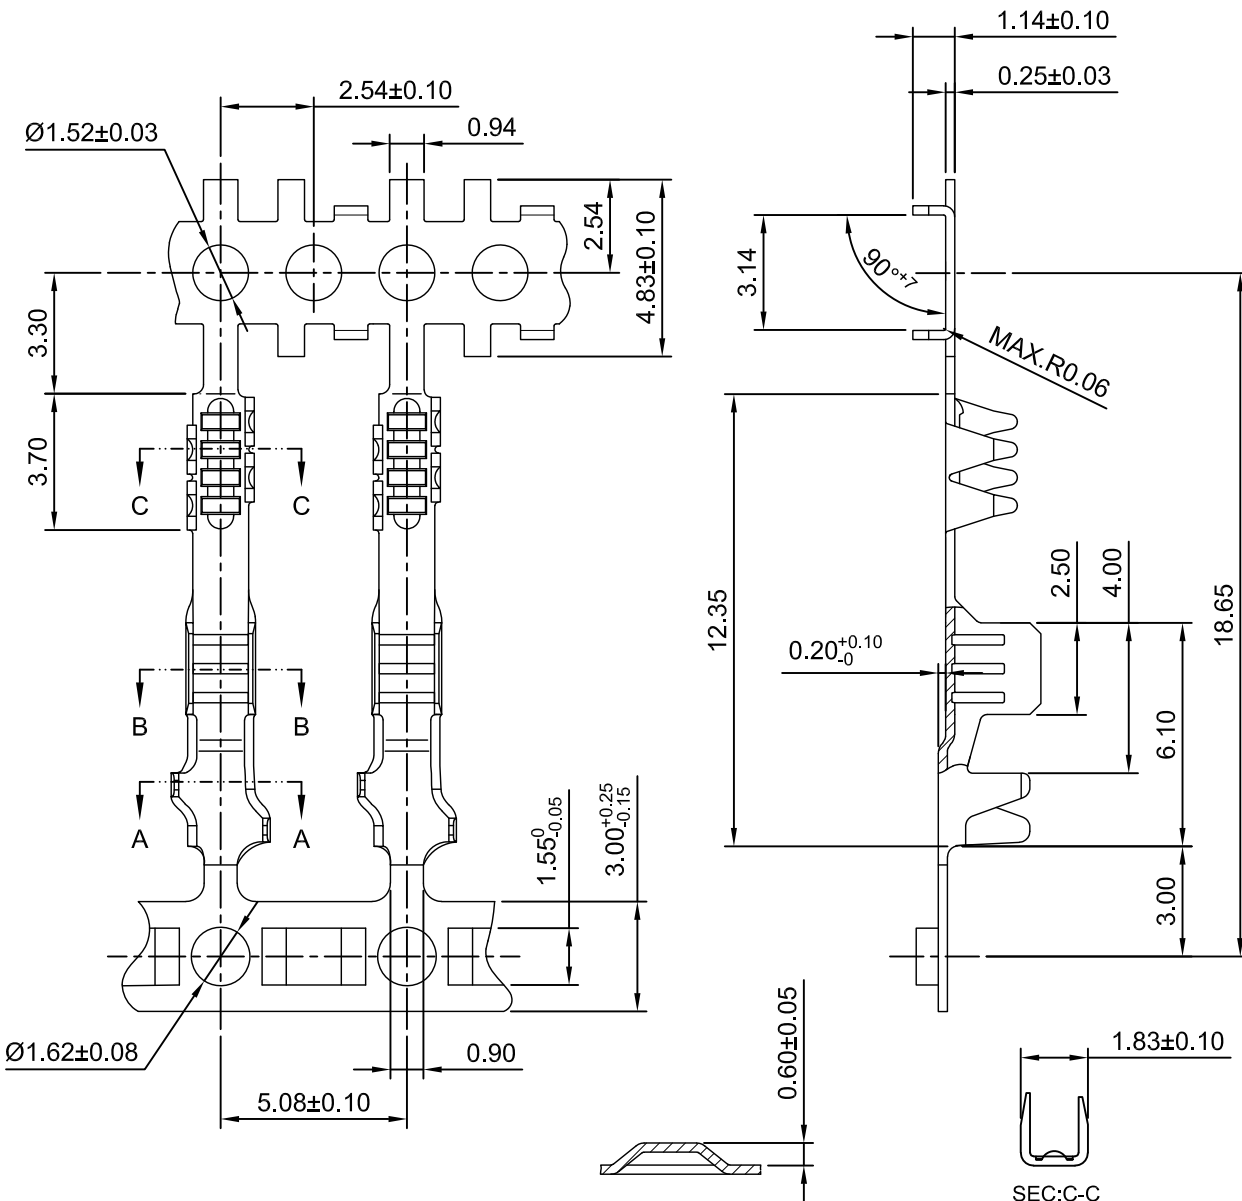

Ordering Information:

A2550-GP-I - *** - ***

1 2 3

1.Part NO.

2.Packing:

(Blank): TYPE 1

2: TYPE 2

3.Finish:

(Blank): Gold over Nickel (Au:1u")

G3: Gold over Nickel (Au:3u"Mating area)

G10: Gold over Nickel (Au:10u"Mating area)

G15: Gold over Nickel (Au:15u"Mating area)

Drahtgroessenbereich/WIRE SIZE 0.20~0.50mm²
Isolationsdurchmesser/INSULATION RANGE 1.15~1.60mm

Drahtcrimpbreite/WIRE CRIMP WIDTH: .055F(1.40mm)
Isocrimpbreite/INSULATION CEIMP WIDTH: .080(2.03mm)






Crimphoehe/crimp height:

0.20mm²=0.84mm

0.25mm²=0.86mm

0.35mm²=0.92mm

0.50mm²=1.01mm

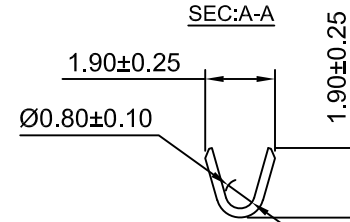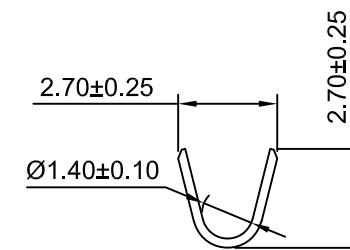

Ordering information & Specifications

Unit:mm

Part NO.	Wire Range	Insultion O.D.	Material	Finish
A2550-TP-I	AWG#20-#24	1.15mm~1.60mm	Phosphor Bronze	Tin over Nickel
A2550-GP-I	AWG#20-#24	1.15mm~1.60mm	Phosphor Bronze	Gold over Nickel

REV	DESCRIPTION	DATE
A0	NEW RELEASE	2022.05.27

CJTconn CHANGJIANG CONNECTORS CO.,LTD.			
Unit	Scale	Sheet	TITLE
mm	5:1	1 of 1	
DRWN	CHK'D	APPR	
Wenmin Luo	Diankui Wan	Jack Yin	
General Tolerances			THIRD ANGLE PROJECTION
x.xx±0.25			
x.xx±0.20			
x.xxx±0.15			
ANGLES ±1°			
DRAWING NO.			REV
A2550-T-I			A0