
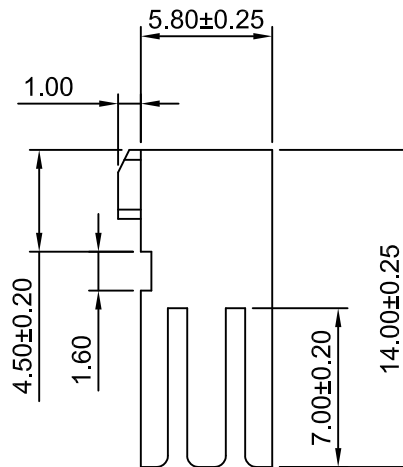
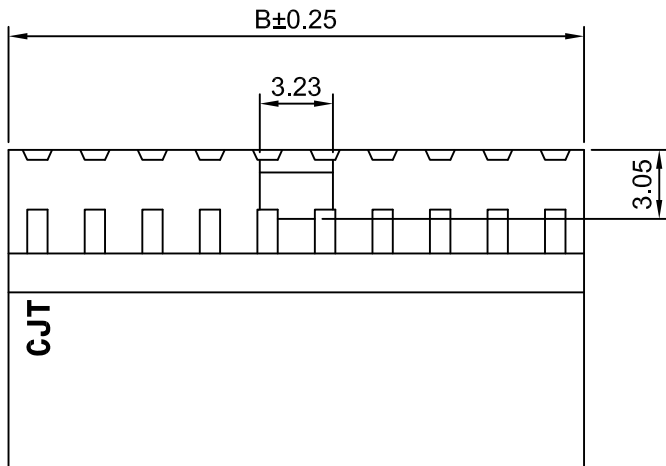


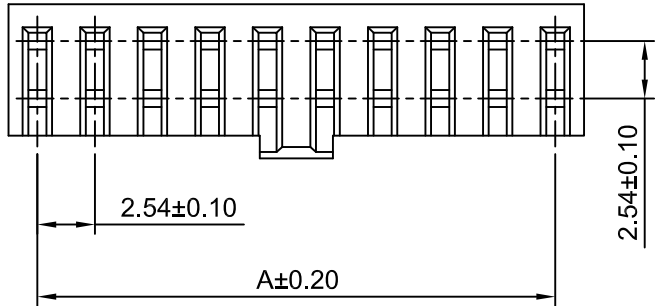

SPECIFICATIONS:

Current Rating: 3A AC,DC

Voltage Rating: 300V AC,DC

Temperature Range: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$

Contact Resistance: $5\text{m}\Omega$ Max

Insulation Resistance: $1000\text{M}\Omega$ Min

Withstanding Voltage: 1100V AC/minute

Material: PBT+30%GF,UL94V-0 (Black)

Ordering Information & Dimensions

Circuits	Dimensions (mm)		Circuits	Dimensions (mm)	
	A	B		A	B
2x2P	2.54	5.08	2x19P	45.72	48.26
2x3P	5.08	7.62	2x20P	48.26	50.80
2x4P	7.62	10.16	2x21P	50.80	53.34
2x5P	10.16	12.70	2x22P	53.34	55.88
2x6P	12.70	15.24	2x23P	55.88	58.42
2x7P	15.24	17.78	2x24P	58.42	60.96
2x8P	17.78	20.32	2x25P	60.96	63.50
2x9P	20.32	22.86	2x26P	63.50	66.04
2x10P	22.86	25.40	2x27P	66.04	68.58
2x11P	25.40	27.94	2x28P	68.58	71.12
2x12P	27.94	30.48	2x29P	71.12	73.66
2x13P	30.48	33.02	2x30P	73.66	76.20
2x14P	33.02	35.56	2x31P	76.20	78.74
2x15P	35.56	38.10	2x32P	78.74	81.28
2x16P	38.10	40.64	2x33P	81.28	83.82
2x17P	40.64	43.18	2x34P	83.82	86.36
2x18P	43.18	45.72			

CJT

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE	
mm	3:1	1 of 1	2.54mm PITCH CRIMP FLEX HOUSING	
DRAWN	CHK'D	APPR		
Haisen Li	Diankui Wan	Jack Yin	DRAWING NO.	
General Tolerances			A2550H-N-2xXP	
THIRD ANGLE PROJECTION			REV A1	

REV	DESCRIPTION	DATE
A1	CHANGE THE DRAWING	2022.09.19
A0	NEW RELEASE	2016.07.01

x.x±0.25
x.xx±0.20
x.xxx±0.15
ANGLES ±1°

