




4P~25P



3P



2P

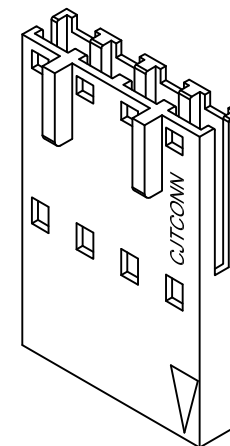

SPECIFICATIONS:

Current Rating: 3A AC,DC
Voltage Rating: 300V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 5mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 1100V AC/minute
Material: PBT+15%G.F.,UL94V-0(Black)



Ordering Information & Dimensions

Part NO.	Dimensions (mm)		Part NO.	Dimensions (mm)	
	A	B		A	B
A2550H-2P-M3	2.54	5.08	A2550H-14P-M3	33.02	35.56
A2550H-3P-M3	5.08	7.62	A2550H-15P-M3	35.56	38.10
A2550H-4P-M3	7.62	10.16	A2550H-16P-M3	38.10	40.64
A2550H-5P-M3	10.16	12.70	A2550H-17P-M3	40.64	43.18
A2550H-6P-M3	12.70	15.24	A2550H-18P-M3	43.18	45.72
A2550H-7P-M3	15.24	17.78	A2550H-19P-M3	45.72	48.26
A2550H-8P-M3	17.78	20.32	A2550H-20P-M3	48.26	50.80
A2550H-9P-M3	20.32	22.86	A2550H-21P-M3	50.80	53.34
A2550H-10P-M3	22.86	25.40	A2550H-22P-M3	53.34	55.88
A2550H-11P-M3	25.40	27.94	A2550H-23P-M3	55.88	58.42
A2550H-12P-M3	27.94	30.48	A2550H-24P-M3	58.42	60.96
A2550H-13P-M3	30.48	33.02	A2550H-25P-M3	60.96	63.50

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit		Scale		Sheet		TITLE 2.54mm PITCH HOUSING	
mm		5:1		1 of 1			
DRWN		CHK'D		APPR			
Dengchun Yi		Diankui Wan		Jack Yin			
General Tolerances				THIRD ANGLE PROJECTION		DRAWING NO. A2550H-XP-M3	
x,xx±0.25 x,xxx±0.20 x,xxxx±0.15 ANGLES ±1°							
1						REV	
1						A1	

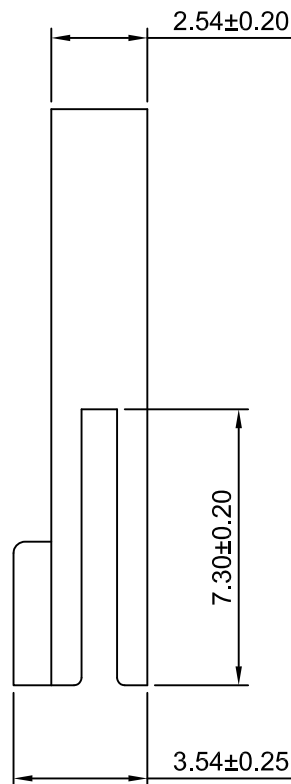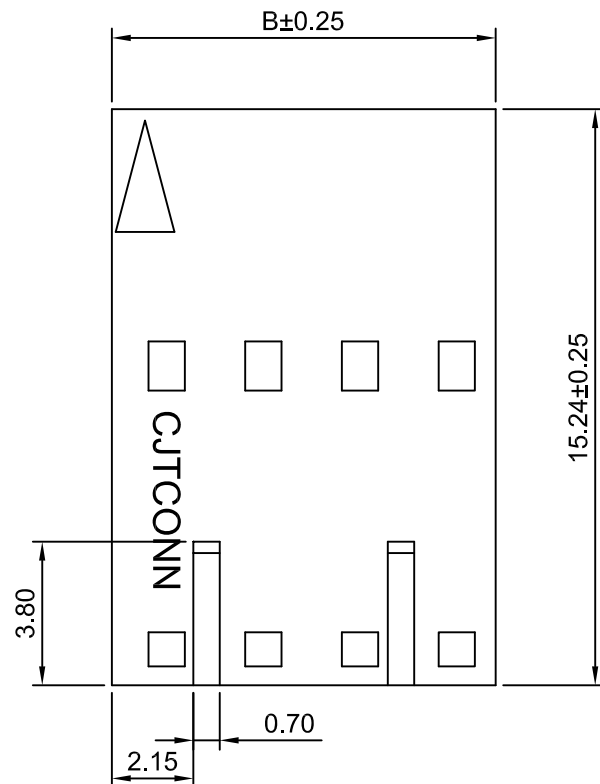

A1	CHANGE THE DRAWING	2021.03.11
A0	NEW RELEASE	2010.03.31
REV	DESCRIPTION	DATE