
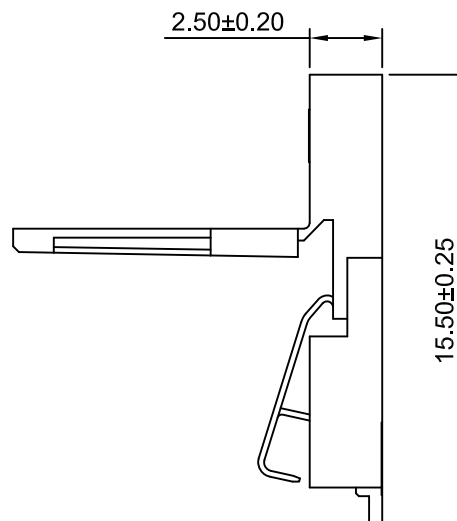
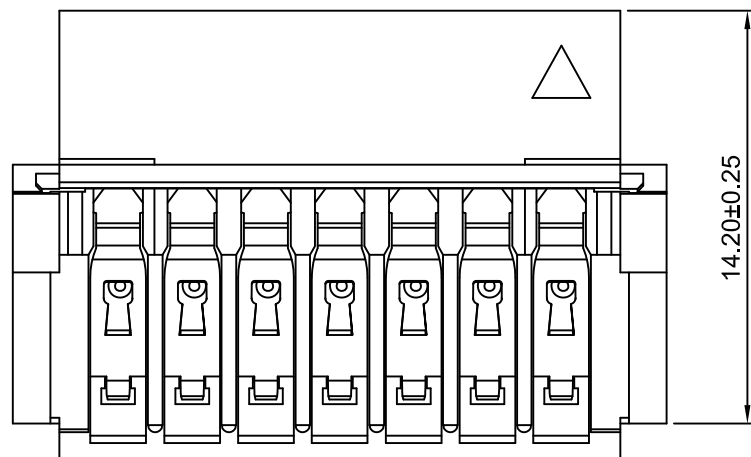


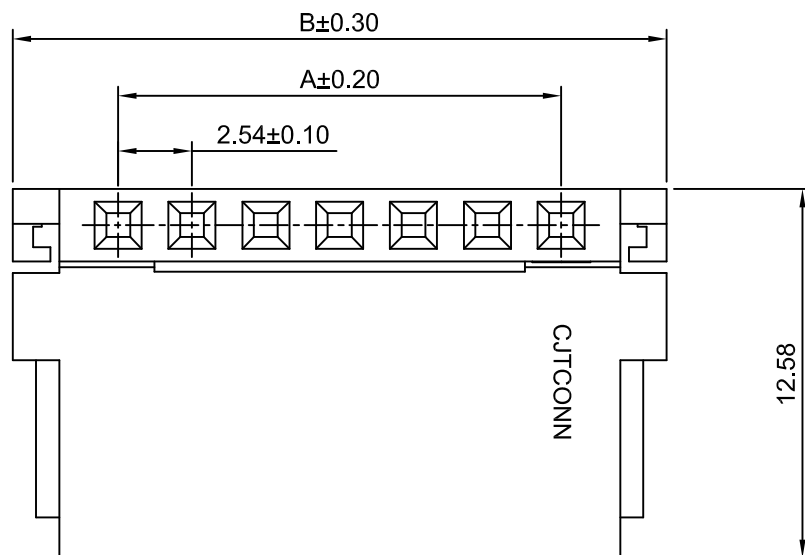

Ordering Information:

A2550HD-XP - *
1 2

1.Part NO.

2.Finish

(Blank) :Tin over Nickel

G :Gold over Nickel

SPECIFICATIONS:

Current Rating: 3A AC,DC

Voltage Rating: 300V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 5mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1100V AC/minute

Terminal Material:Phosphor Bronze/Tin over Nickel

Material: Nylon 66,UL94V-0(Blue)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2P	2.54	10.08	20P	48.26	55.80
3P	5.08	12.62	21P	50.80	58.34
4P	7.62	15.16	22P	53.34	60.88
5P	10.16	17.70	23P	55.88	63.42
6P	12.70	20.24	24P	58.42	65.96
7P	15.24	22.78	25P	60.96	68.50
8P	17.78	25.32	26P	63.50	71.04
9P	20.32	27.86	27P	66.04	73.58
10P	22.86	30.40	28P	68.58	76.12
11P	25.40	32.94	29P	71.12	78.66
12P	27.94	35.48	30P	73.66	81.20
13P	30.48	38.02	31P	76.20	83.74
14P	33.02	40.56	32P	78.74	86.28
15P	35.56	43.10	33P	81.28	88.82
16P	38.10	45.64	34P	83.82	91.36
17P	40.64	48.18	35P	86.36	93.90
18P	43.18	50.72	36P	88.90	96.44
19P	45.72	53.26			

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE	
mm	4:1	1 of 1		
DRAWN	CHKD	APPR	2.54mm PITCH CRIMP FLEX HOUSING	
Chengbiao Ye	Djankui Wan	Jack Yin		
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO. A2550HD-XP	REV A1
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°				

A1	CHANGE THE DRAWING	2023.02.15
A0	NEW RELEASE	2012.06.04
REV	DESCRIPTION	DATE