
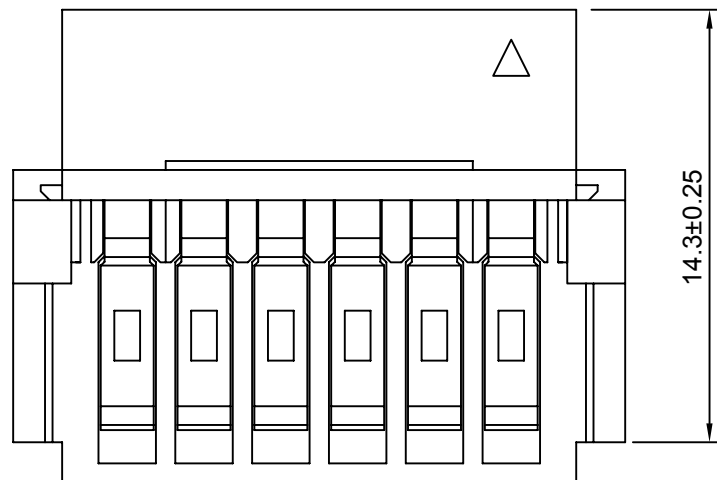


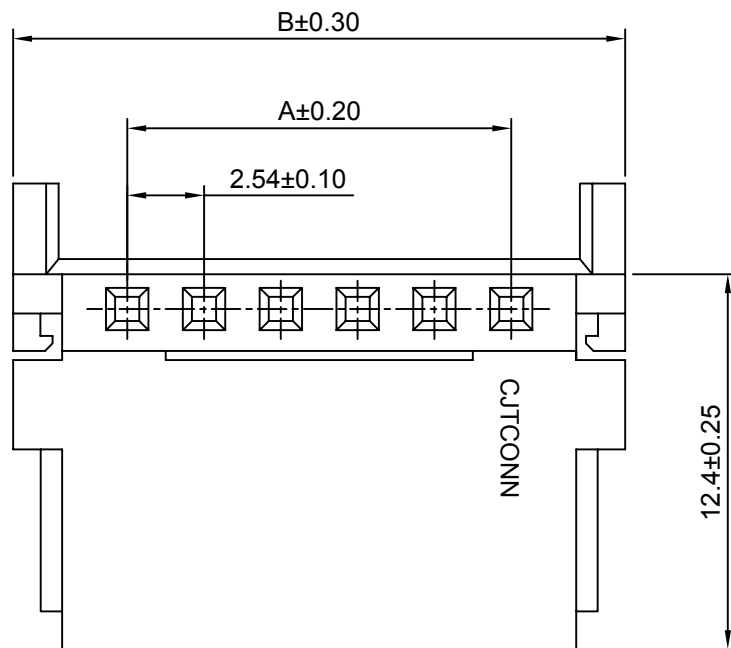

Ordering Information:

A2550HE-XP - *
1 2

1.Part No.

2.Finish

(blank) :Tin over Nickel

G :Gold over Nickel

SPECIFICATIONS:

Current Rating: 3A AC,DC

Voltage Rating: 300V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 5mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1100V AC/minute

Terminal Material:Phosphor Bronze/Tin over Nickel

Material: Nylon 66,UL94V-0(Blue)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2P	2.54	10.08	19P	45.72	53.26
3P	5.08	12.62	20P	48.26	55.80
4P	7.62	15.16	21P	50.80	58.34
5P	10.16	17.70	22P	53.34	60.88
6P	12.70	20.24	23P	55.88	63.42
7P	15.24	22.78	24P	58.42	65.96
8P	17.78	25.32	25P	60.96	68.50
9P	20.32	27.86	26P	63.50	71.04
10P	22.86	30.40	27P	66.04	73.58
11P	25.40	32.94	28P	68.58	76.12
12P	27.94	35.48	29P	71.12	78.66
13P	30.48	38.02	30P	73.66	81.20
14P	33.02	40.56	31P	76.20	83.74
15P	35.56	43.10	32P	78.74	86.28
16P	38.10	45.64	33P	81.28	88.82
17P	40.64	48.18	34P	83.82	91.36
18P	43.18	50.72			

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit Scale Sheet
mm 4:1 1 of 1

Draw BY:

Jack Yin

Approved :

GONGYB

Title :

2.54mm PITCH CRIMP

FLEX HOUSING

DRAW NO : A2550HE-XP

REV
A0

REV	DESCRIPTION	DATE
A0	NEW RELEEASE	2015.06.04

General Tolerance	
x.xx±0.25	ANGLE±
x.xx±0.20	
x.xxx±0.15	