
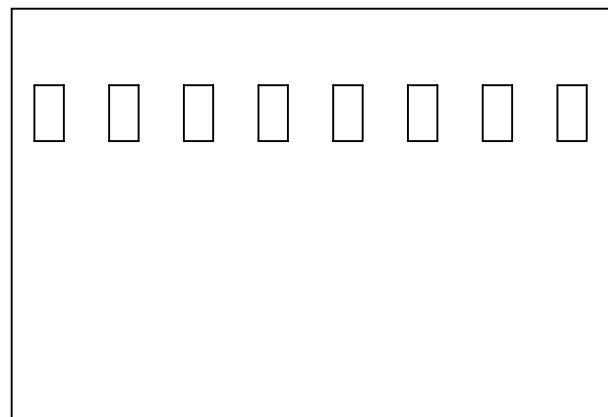
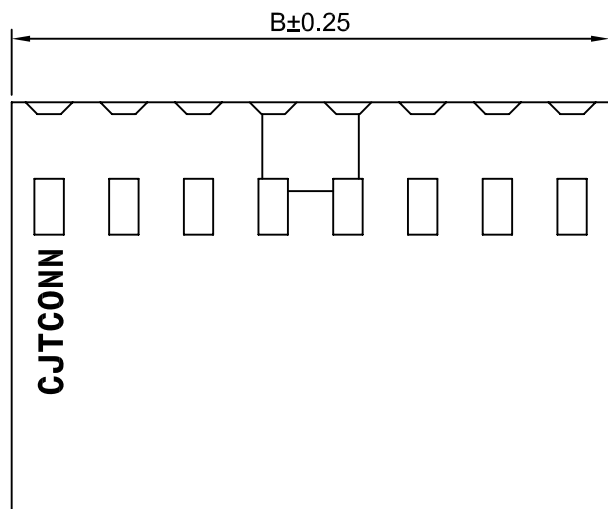


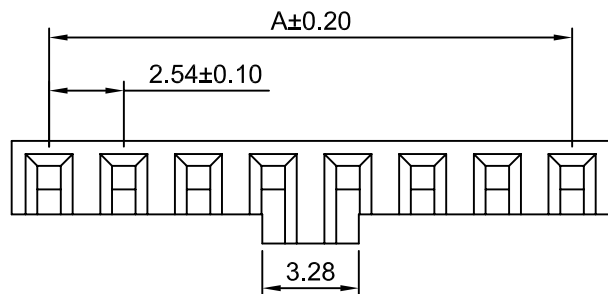

Ordering Information:


A2550HH-N-XP - **
1 2

1.Part No.

2.Color:

(Blank): Black

BL:Blue

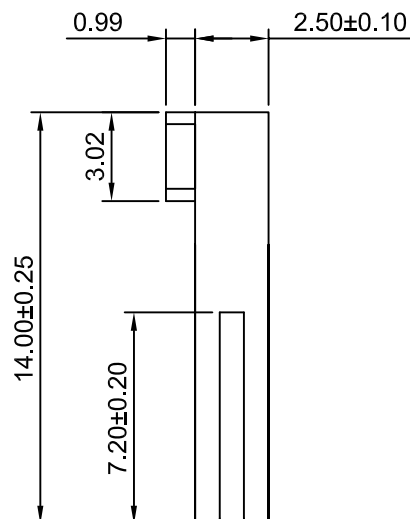

SPECIFICATIONS:

Current Rating: 3A AC,DC

Voltage Rating: 300V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 5mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1100V AC/minute

Material: PBT+30%GF,UL94V-0(Black)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2P	2.54	5.08	14P	33.02	35.56
3P	5.08	7.62	15P	35.56	38.10
4P	7.62	10.16	16P	38.10	40.64
5P	10.16	12.70	17P	40.64	43.18
6P	12.70	15.24	18P	43.18	45.72
7P	15.24	17.78	19P	45.72	48.26
8P	17.78	20.32	20P	48.26	50.80
9P	20.32	22.86	21P	50.80	53.34
10P	22.86	25.40	22P	53.34	55.88
11P	25.40	27.94	23P	55.88	58.42
12P	27.94	30.48	24P	58.42	60.96
13P	30.48	33.02	25P	60.96	63.50

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	Title : 2.54mm PITCH CRIMP FLEX HOUSING	
mm	4:1	1 of 1		
Draw BY:		Approved :		
Tony Su		Jack Yin		
General Tolerance				
x.xx±0.25 x.xx±0.20 x.xxx±0.15		ANGLE± 		
DRAW NO : A2550HH-N-XP			REV A0	