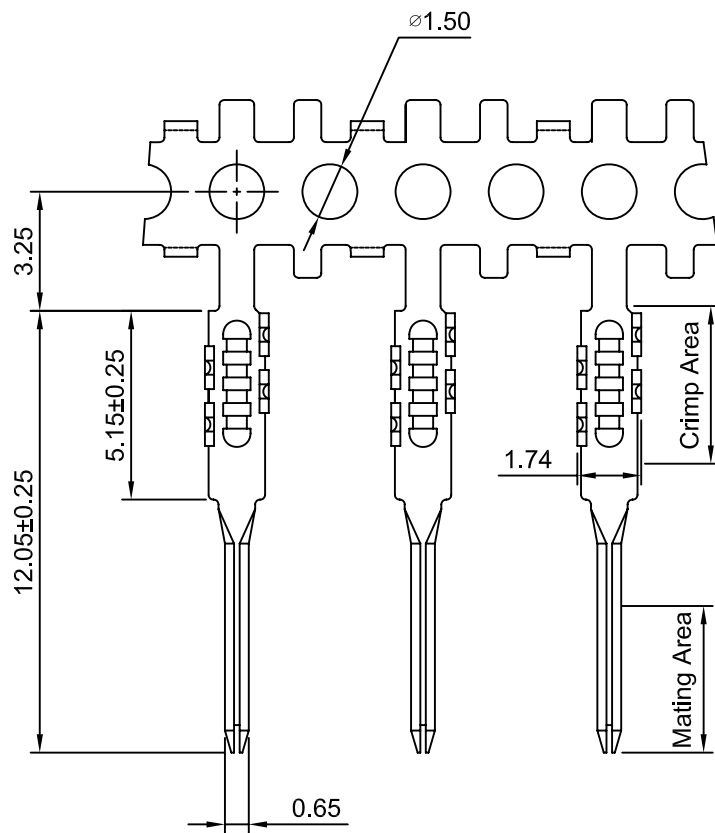



Ordering Information:

A2550M-GP-KE - ***
1 2

1.Part No.

2.Finish:

TG :Mating Area : 100μin (2.54μm) MIN. Tin
Crimp Area: 1μin (0.025μm) MIN. Gold
GT15 :Mating Area :15μin (0.38μm) MIN. Gold
Crimp Area: 100μin (2.54μm) MIN. Tin
GT30 :Mating Area :30μin (0.76μm) MIN. Gold
Crimp Area: 100μin (2.54μm) MIN. Tin
GT50 :Mating Area :50μin (1.27μm) MIN. Gold
Crimp Area: 100μin (2.54μm) MIN. Tin
GG15 :Mating Area :15μin (0.38μm) MIN. Gold
Crimp Area: 1μin (0.025μm) MIN. Gold
GG30 :Mating Area :30μin (0.76μm) MIN. Gold
Crimp Area: 1μin (0.025μm) MIN. Gold
GG50 :Mating Area :50μin (1.27μm) MIN. Gold
Crimp Area: 1μin (0.025μm) MIN. Gold

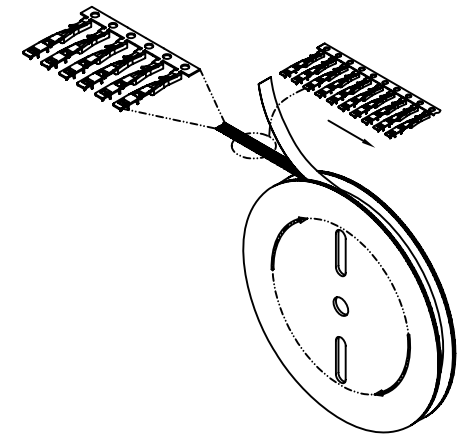

Winding Direction

Ordering information & Specifications

Unit:mm

Part No	Wire Range	Insultion O.D.	Material	Finish	Qty/reel
A2550M-TP-KE	FFC WIRE	-----	Phosphor Bronze	Tin over Nickel	20,000 PCS
A2550M-GP-KE	FFC WIRE	-----	Phosphor Bronze	Gold over Nickel	20,000 PCS

Optional Gold plating available but MOQ requested

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet
mm	5:1	1 of 1
Draw BY:	Approved :	
Tony Su	Jack Yin	

Title :

2.54mm PITCH

CRIMP FLEX TERMINAL

DRAW NO : A2550M-T-KE

REV
A1

REV	DESCRIPTION	DATE	General Tolerance	ANGLE±
A1	Version update	2017.12.12	x.xx≤0.25	
A0	NEW RELEASE	2016.10.10	x.xx≤0.20	
			x.xxx≤0.15	