
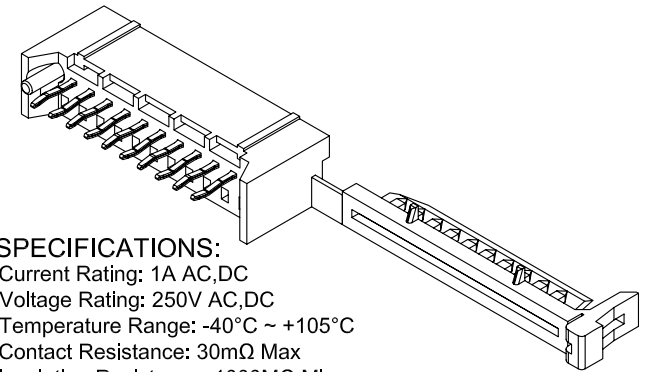
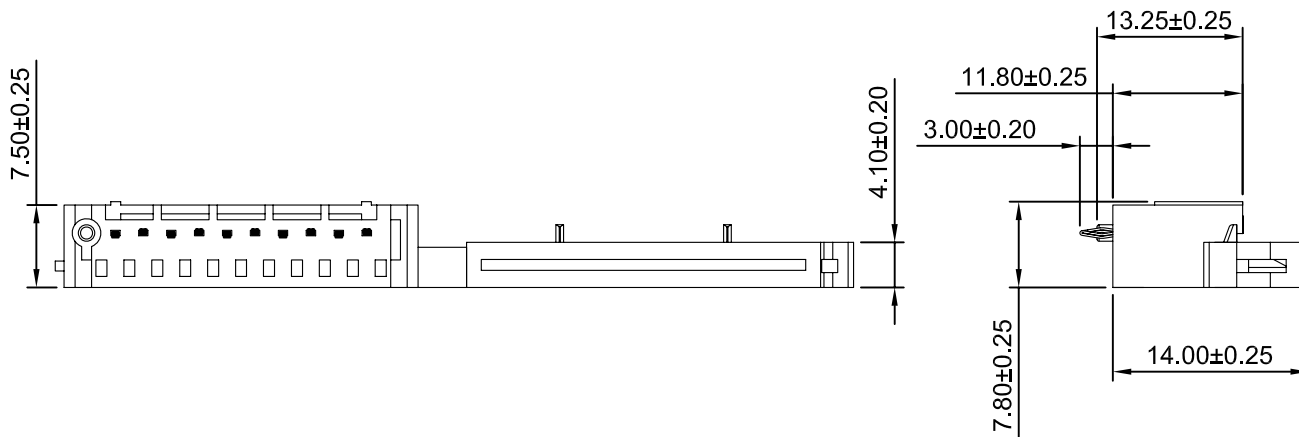


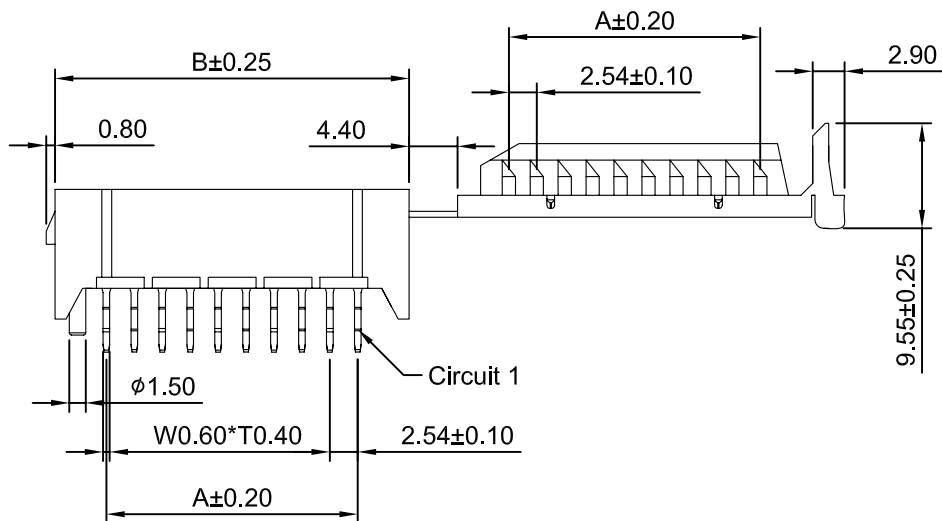

SPECIFICATIONS:

Current Rating: 1A AC,DC
 Voltage Rating: 250V AC,DC
 Temperature Range: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$
 Contact Resistance: 30m Ω Max
 Insulation Resistance: 1000M Ω Min
 Withstanding Voltage: 1000V AC/minute
 Pin Material: Phosphor Bronze/Tin over Nickel
 Material: Nylon66, UL94V-0(White)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
1P	----	9.34	14P	33.02	42.36
2P	2.54	11.88	15P	35.56	44.90
3P	5.08	14.42	16P	38.10	47.44
4P	7.62	16.96	17P	40.64	49.98
5P	10.16	19.50	18P	43.18	52.52
6P	12.70	22.04	19P	45.72	55.06
7P	15.24	24.58	20P	48.26	57.60
8P	17.78	27.12	21P	50.80	60.14
9P	20.32	29.66	22P	53.34	62.68
10P	22.86	32.20	23P	55.88	65.22
11P	25.40	34.74	24P	58.42	67.76
12P	27.94	37.28	25P	60.96	70.30
13P	30.48	39.82			

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet
mm	1.5:1	1 of 1
Draw BY:		Approved :
Tony Su		Jack Yin

Title :

2.54mm PITCH

FFC CONNECTROS

DRAW NO : A2550WVFD-XP

REV
A1

REV	DESCRIPTION	DATE
A1	NEW RELEASE	2017.06.20
A0	NEW RELEASE	2017.05.18

General Tolerance	
x.xx $\leq$ 0.25	ANGLE $\pm$
x.xx $\leq$ 0.20	
x.xxx $\leq$ 0.15	