

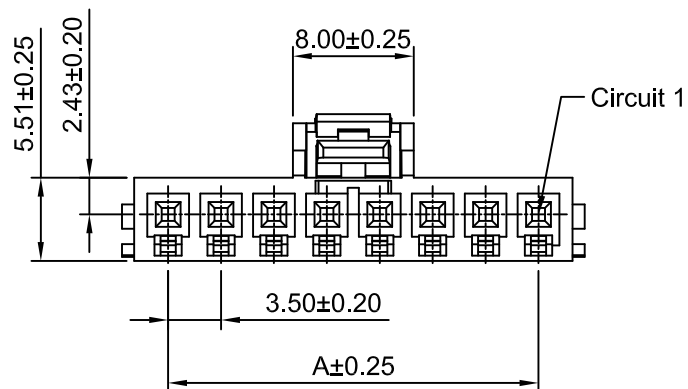
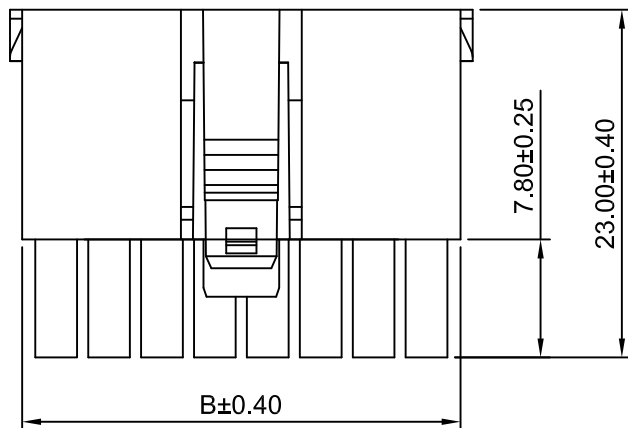


2P
KEY A




3P
KEY A




4P~8P
KEY A

KEY A




2P
KEY B




3P
KEY B


KEY B



4P~8P
KEY B



KEY A



KEY B

Ordering Information:

A3501HE-XP - ***

1 2

1.Part No.

2.Color.

(Blank):Black,KEY A

NAT:Natural,KEY B

SPECIFICATIONS:

Current Rating: 14A AC,DC (AWG#16)

Voltage Rating: 400V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 15mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage:1800VAC/minute

Material: Nylon 66,UL94V-0

Ordering Information & Dimensions

Part NO.	Dimensions(mm)	
	A	B
A3501HE-2P	3.50	8.00
A3501HE-3P	7.00	11.50
A3501HE-4P	10.50	15.00
A3501HE-5P	14.00	18.50
A3501HE-6P	17.50	22.00
A3501HE-7P	21.00	25.50
A3501HE-8P	24.50	29.00

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit Scale Sheet
mm 2:1 1 of 2

Draw By: Approved :
Diankui Wan Jack Yin

General Tolerance
x.x±0.25
x.xx±0.20
x.xxx±0.15

Title :
3.50mm Pitch
Single Row Housing
DRAW NO : A3501HE-XP REV A0

REV	DESCRIPTION	DATE
A0	NEW RELEASE	2019.05.30