
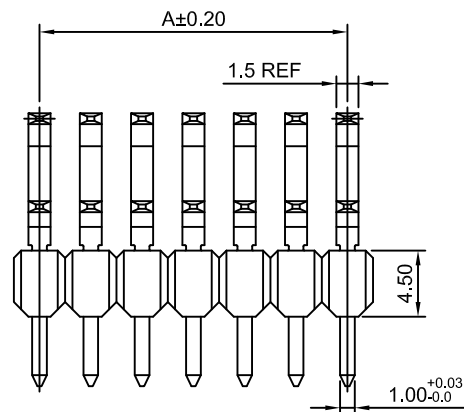
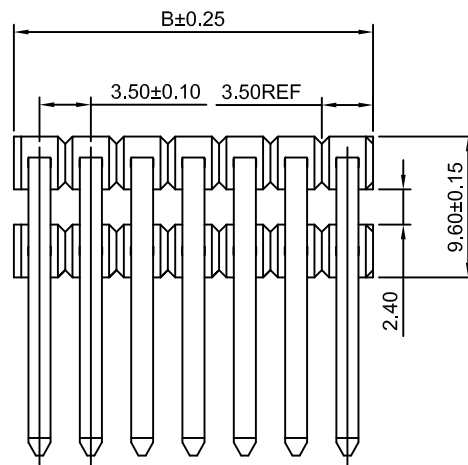


P.C.B LAYOUT
TOLERANCE:±0.05

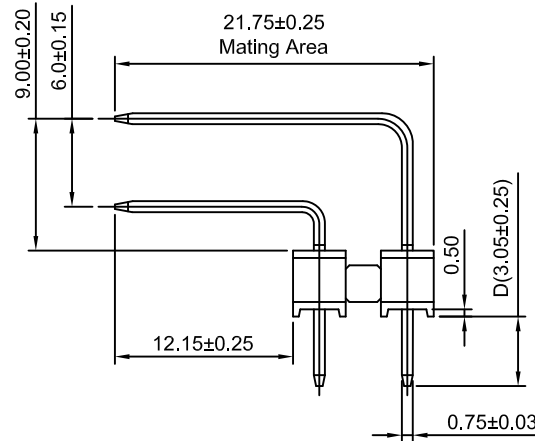

Ordering Information:

A3501WRF-2xXP - *** - ***
1 2 3

1.Part NO.

2.Finish:

(Blank): Tin over Nickel

G: Gold over Nickel(Au:1u")

G3: Gold over Nickel(Au:3u",Mating Area)

G30: Gold over Nickel(Au:30u",Mating Area)

3.Size(D):

(Blank):3.05mm

D475:D4.75mm

SPECIFICATIONS:

Current Rating: 7A AC,DC

Voltage Rating: 500V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max.

Insulation Resistance: 100MΩ Min.

Withstanding Voltage: 600V AC/minute

Pin Material: Brass

Material: LCP+30%G.F UL94V-0(Black)

Ordering Information & Dimensions

Part NO.	Dimensions(mm)	
	A	B
A3501WRF-2x2P	3.50	7.00
A3501WRF-2x3P	7.00	10.50
A3501WRF-2x4P	10.50	14.00
A3501WRF-2x5P	14.00	17.50
A3501WRF-2x6P	17.50	21.00
A3501WRF-2x7P	21.00	24.50
A3501WRF-2x8P	24.50	28.00
A3501WRF-2x9P	28.00	31.50
A3501WRF-2x10P	31.50	35.00

CJTconn			CHANGJIANG CONNECTORS CO.,LTD.	
Unit	Scale	Sheet	TITLE	
mm	2:1	1 of 1	3.50mm PITCH RIGHT-ANGLE DUAL ROW PIN HEADER	
DRAWN	CHK'D	APPR	DRAWING NO.	
Haisen Li	Djankui Wan	Jack Yin	A3501WRF-2xXP	
General Tolerances			THIRD ANGLE PROJECTION	
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°			REV A1	

A0	NEW RELEASE	2022.10.25
REV	DESCRIPTION	DATE