
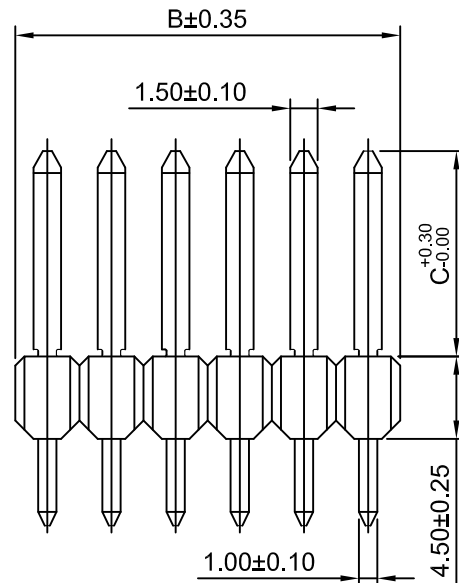
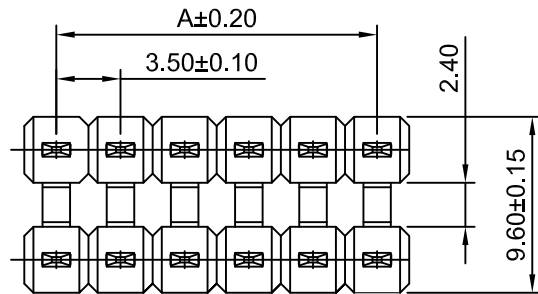


P.C.B LAYOUT
TOLERANCE:±0.05

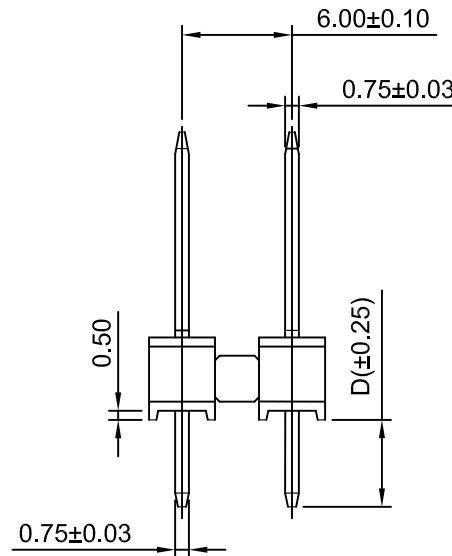

Ordering Information:

A3501WVF-2xXP - *** - ***
1 2 3

1.Part NO.

2.Finish:

(Blank): Tin over Nickel

G: Gold over Nickel(Au:1u")

G2: Gold over Nickel(Au:2u",Mating Area)

G20: Gold over Nickel(Au:20u",Mating Area)

3.Size(C、D):

(Blank):C1120D305

C1120:C11.20mm

C1609:C16.09mm

D305:D3.05mm

D475:D4.75mm

SPECIFICATIONS:

Current Rating: 7A AC,DC

Voltage Rating: 500V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max.

Insulation Resistance: 100MΩ Min.

Withstanding Voltage: 600V AC/minute

Pin Material: Brass

Material: LCP+30%G.F UL94V-0(Black)

Ordering Information & Dimensions

Part NO.	Dimensions(mm)	
	A	B
A3501WVF-2x2P	3.50	7.00
A3501WVF-2x3P	7.00	10.50
A3501WVF-2x4P	10.50	14.00
A3501WVF-2x5P	14.00	17.50
A3501WVF-2x6P	17.50	21.00
A3501WVF-2x7P	21.00	24.50
A3501WVF-2x8P	24.50	28.00
A3501WVF-2x9P	28.00	31.50
A3501WVF-2x10P	31.50	35.00

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE	
mm	2.5:1	1 of 1		
DRAWN	CHK'D	APPR	3.50mm PITCH VERTICAL SINGLE ROW PIN HEADER	
Haisen Li	Djankui Wan	Jack Yin		
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO.	REV
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°			A3501WVF-2xXP	A0

A0	NEW RELEASE	2021.12.20
REV	DESCRIPTION	DATE