

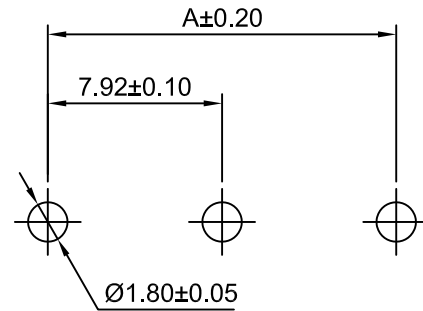


EvenCircuits empty


Circuit 1

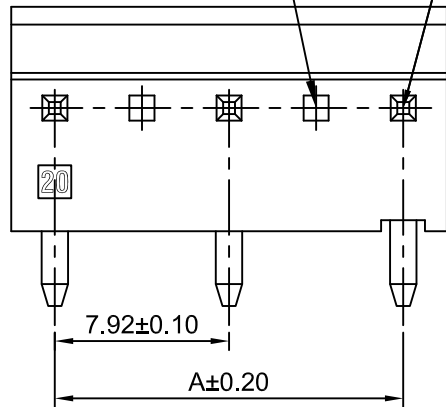

P.C.B LAYOUT

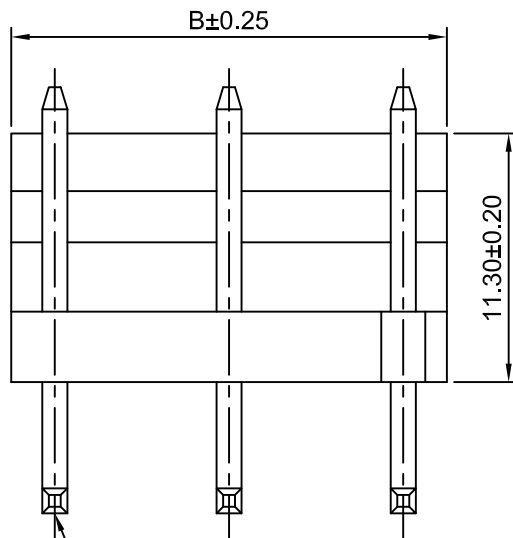

PIN 1.14 SQ

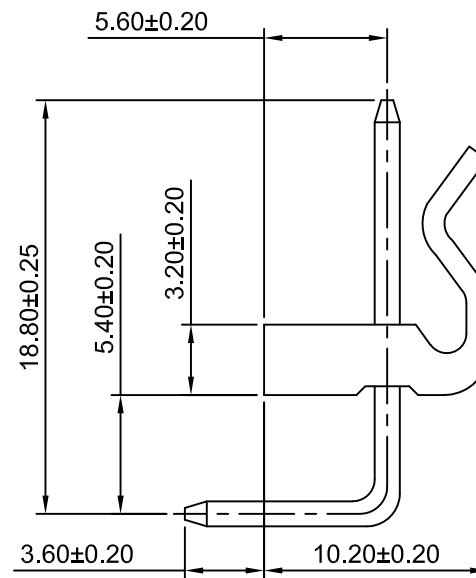

Ordering Information:

A3961WR-XP-A - *** - ** - **

1 2 3 4

1.Part NO.

2.Material:

(Blank):Nylon 66,UL94V-2(Natural)

V0:Nylon 66,UL94V-0(White)

GWT:Nylon 66,UL94V-0(Beige), IEC 60335-1,5th
EditionGlow Wire Capable.

3.Color:

(Blank):see section 2 Material

RD:Red

4.Finish:

(Blank):Tin over Nickel

G:Gold over Nickel

SPECIFICATIONS:

Current Rating: 7A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1500V AC/minute

Pin Material: Brass

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
3P	7.92	11.88	15P	55.44	59.40
5P	15.84	19.80	17P	63.36	67.32
7P	23.76	27.72	19P	71.28	75.24
9P	31.68	35.64	21P	79.20	83.16
11P	39.60	43.56	23P	87.12	91.08
13P	47.52	51.48			

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE		
mm	3:1	1 of 1	3.96mm PITCH RIGHT-ANGLE WAFER		
DRWN	CHK'D	APPR			
ZhenNing Luo	DianKui Wan	Jack Yin			
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO.		REV
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°			A3961WR-XP-A		A1

A1	CHANGE THE DRAWING	2022.03.04
A0	NEW RELEASE	2005.05.10
REV	DESCRIPTION	DATE