
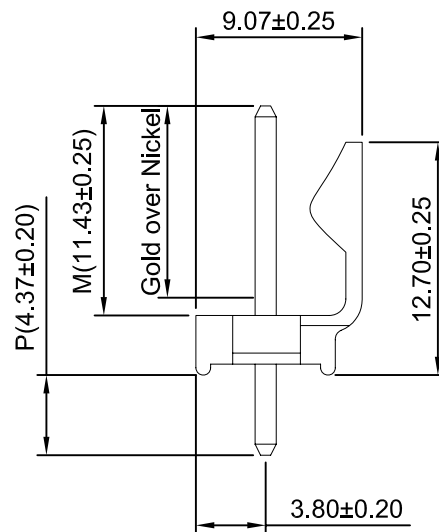
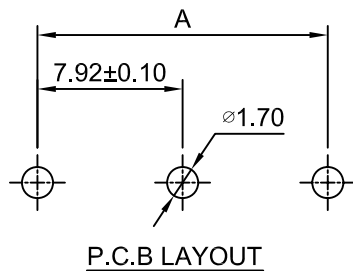


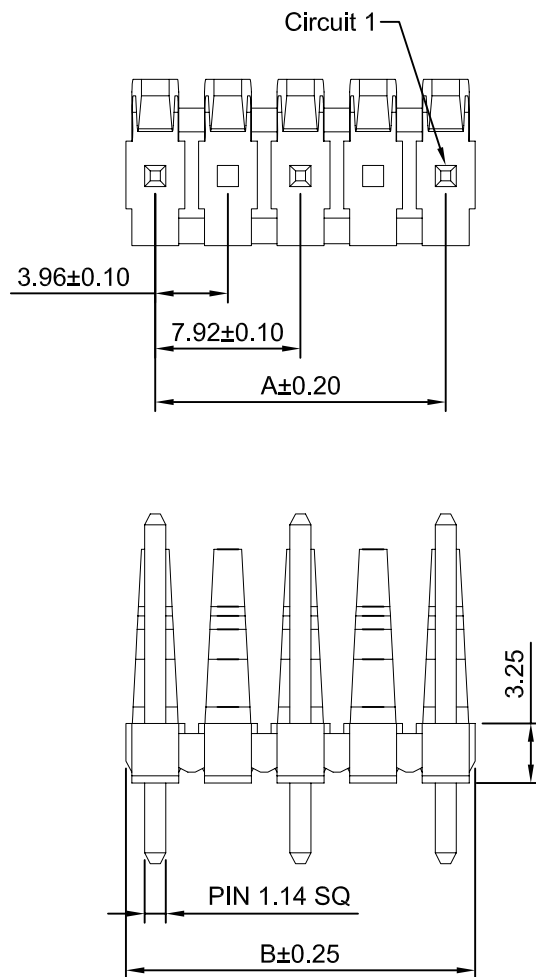

Note: ①

PART NO.	P(mm)	M(mm)	PART NO.	P(mm)	M(mm)
P44M114	4.37	11.43	P115M114	11.53	11.43
P32M114	3.18	11.43	P32M133	3.18	13.28
P25M133	2.51	13.28	P74M114	7.42	11.43
P44M122	4.37	12.19	P123M122	12.34	12.19

Ordering Information:

A3961WVC-XP-A - **** - ***
1 2 3

1.Part No.

2.Size(P,M):See ①

3.Finish

(blank):Tin over Nickel

G:Gold over Nickel (1u")

G15:Gold over Nickel(15u")

G20:Gold over Nickel(20u")

G30:Gold over Nickel(30u")

SPECIFICATIONS:

Current Rating: 7A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1500V AC/minute

Pin Material: Brass/Tin over Nickel

Material: Nylon 66,UL94V-0(Black)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
3P	7.92	11.12	15P	55.44	58.64
5P	15.84	19.04	17P	63.36	66.56
7P	23.76	26.96	19P	71.28	74.48
9P	31.68	34.88	21P	79.20	82.40
11P	39.60	42.80	23P	87.12	90.32
13P	47.52	50.72			

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet
mm	2.5:1	1 of 1
Draw BY:		Approved :
Tony Su		Jack Yin

Title :

3.96mm PITCH

180° WAFER

DRAW NO : A3961WVC-XP-A

REV
A0

General Tolerance		
A0	NEW RELEASE	2005.05.10
REV	DESCRIPTION	DATE

x.x±0.25	ANGLE±
x.xx±0.20	
x.xxx±0.15	