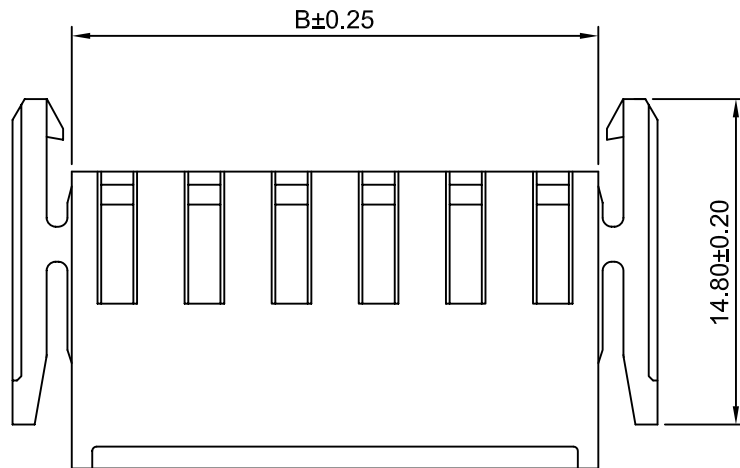
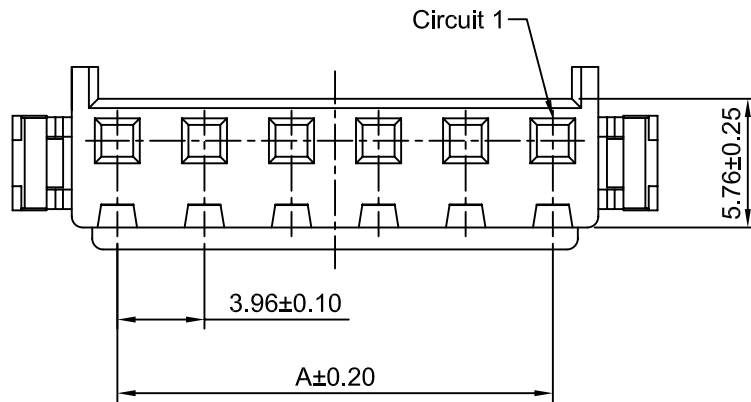


SPECIFICATIONS:

Current Rating: 10A AC, DC (AWG #16)
Voltage Rating: 250V AC, DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 10mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 1500V AC/minute
Material: Nylon 66, UL94V-0 (White)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2P	3.96	8.10	9P	31.68	35.82
3P	7.92	12.06	10P	35.64	39.78
4P	11.88	16.02	11P	39.60	43.74
5P	15.84	19.98	12P	43.56	47.70
6P	19.80	23.94	13P	47.52	51.66
7P	23.76	27.90	14P	51.48	55.62
8P	27.72	31.86	15P	55.44	59.58

CJTconn

CHANGJIANG CONNECTORS CO., LTD.

Unit	Scale	Sheet
mm	3:1	1 of 1

Draw BY:	Approved :
LIZQ	GONGYB

General Tolerance

x.xx±0.25	ANGLE±
x.xxx±0.20	
x.xxx±0.15	

Title :

3.96mm PITCH

HOUSING

DRAW NO : A3963HB-XP

REV
A0

REV	DESCRIPTION	DATE
A0	NEW RELEASE	2010.05.24