

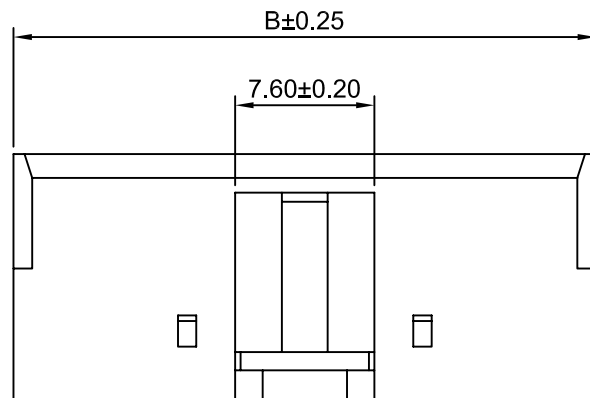
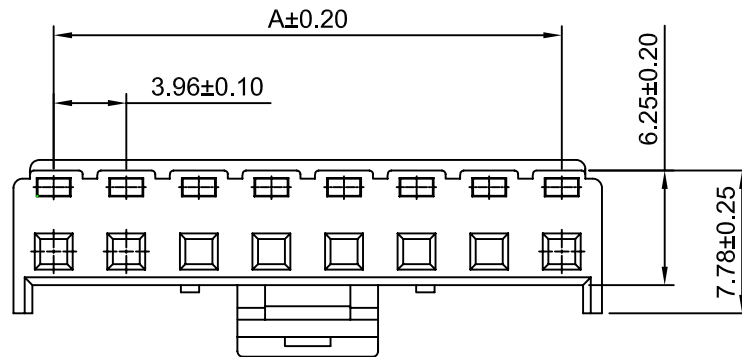


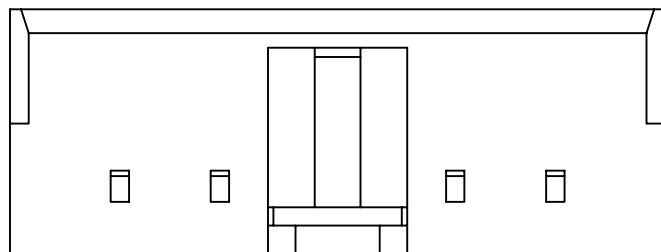

4P~8P



9P~15P

SPECIFICATIONS:

Current Rating: 10A AC,DC(AWG #16)
Voltage Rating: 250V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 10mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 1500V AC/minute
Material: Nylon 66,UL94V-0(White)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2P	3.96	8.02	9P	31.68	35.74
3P	7.92	11.98	10P	35.64	39.70
4P	11.88	15.94	11P	39.60	43.66
5P	15.84	19.90	12P	43.56	47.62
6P	19.80	23.86	13P	47.52	51.58
7P	23.76	27.82	14P	51.48	55.54
8P	27.72	31.78	15P	55.44	59.50

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet
mm	2.5:1	1 of 1
Draw BY:		Approved :
Jack Yin		GONGYB

Title : 3.96mm PITCH

Housing

General Tolerance	
x.x≤0.25	ANGLE±
x.xx≤0.20	
x.xxx≤0.15	

DRAW NO : A3963HE-XP

REV A0

A0	NEW RELEASE	2015.07.01
REV	DESCRIPTION	DATE