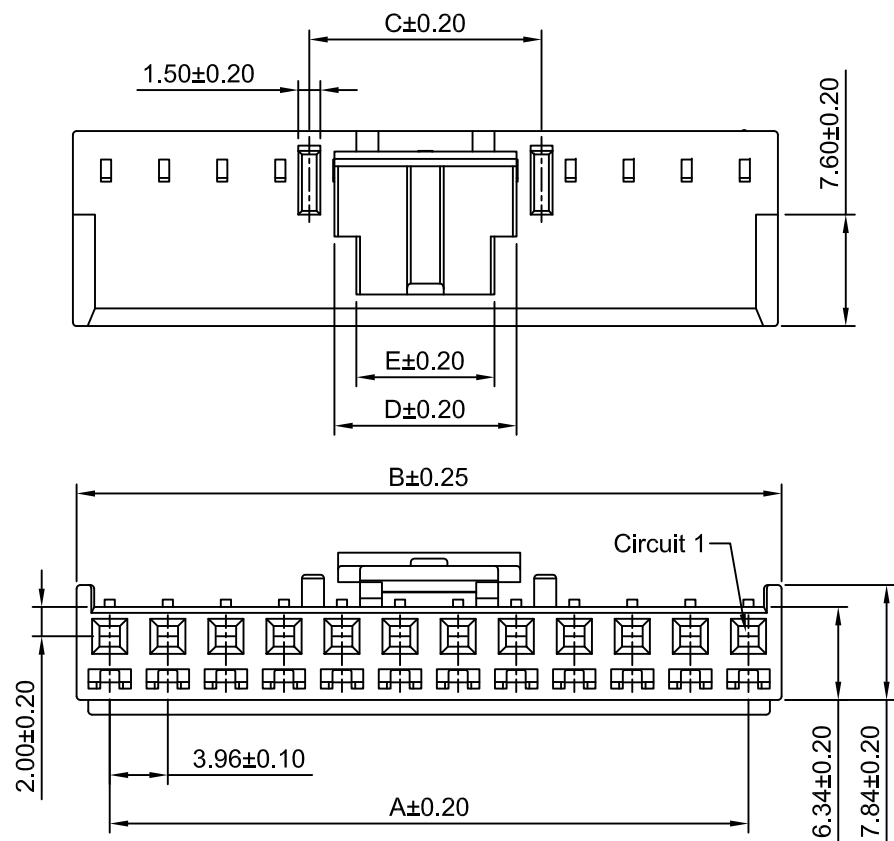


Ordering Information:

A3963HI-XP - ** - **
1 2 3

1.Part NO.

2.Material:

(blank): Nylon 66,UL94V-0 (White)

GWT: Nylon 66,UL94V-0 (Beige),

IEC 60335-1,5th Edition

Glow Wire Capable.

3.Color:

(Blank):White

BK:Black BL:Blue

RD:Red BR:Brown

SPECIFICATIONS:

Current Rating: 10A AC,DC(MAX)

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max



Insulation Resistance: 1000MQ Min

Withstanding Voltage: 1500V AC/minute


Material: Nylon 66,UL94V-0(White)

Ordering Information & Dimensions


Part NO.	Dimensions(mm)				
	A	B	C	D	E
A3963HI-2P	3.96	8.48	---	4.50	4.28
A3963HI-3P	7.92	12.44	---	8.46	5.46
A3963HI-4P	11.88	16.40	---	12.42	9.42
A3963HI-5P	15.84	20.36	11.90	8.46	5.46
A3963HI-6P	19.80	24.32	15.86	12.42	9.42
A3963HI-7P	23.76	28.28	11.90	8.46	5.46
A3963HI-8P	27.72	32.24	15.86	12.42	9.42
A3963HI-9P	31.68	36.20	11.90	8.46	5.46
A3963HI-10P	35.64	40.16	15.86	12.42	9.42
A3963HI-11P	39.60	44.12	11.90	8.46	5.46
A3963HI-12P	43.56	48.08	15.86	12.42	9.42

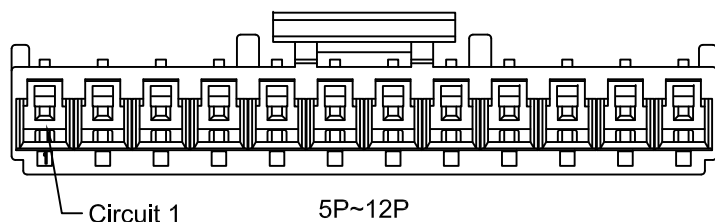

2P



3P



4P

A0	NEW RELEASE	2013.06.06
REV	DESCRIPTION	DATE

CJTconn CHANGJIANG CONNECTORS CO.,LTD.				
Unit	Scale	Sheet	TITLE 3.96mm PITCH HOUSING	
mm	2:1	1 of 1		
DRWN	CHK'D	APPR		
Dengchun Yi	Dlankul Wan	Jack Yin	DRAWING NO.	
General Tolerances				
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°			REV A0	
THIRD ANGLE PROJECTION				
			A3963HI-XP	