



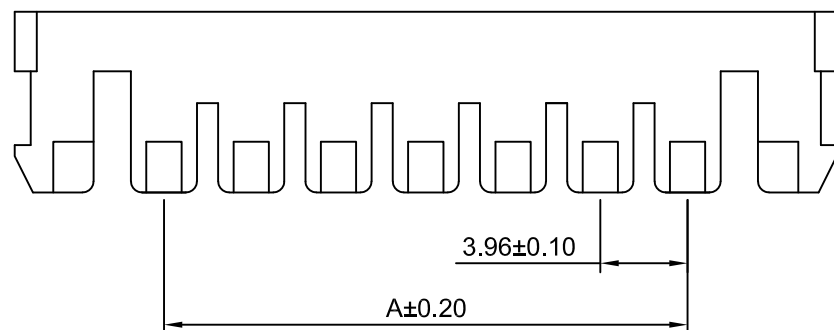


3.96±0.10

A±0.20

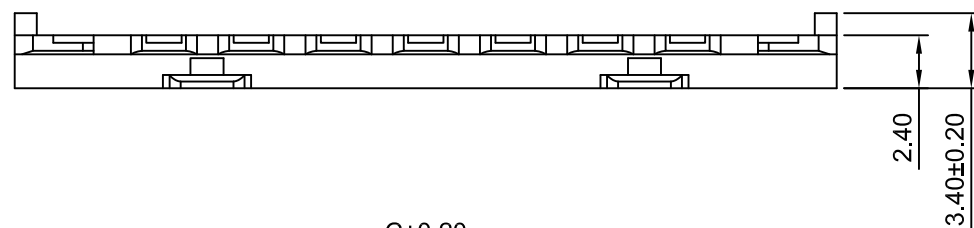

2.40



3.40±0.20

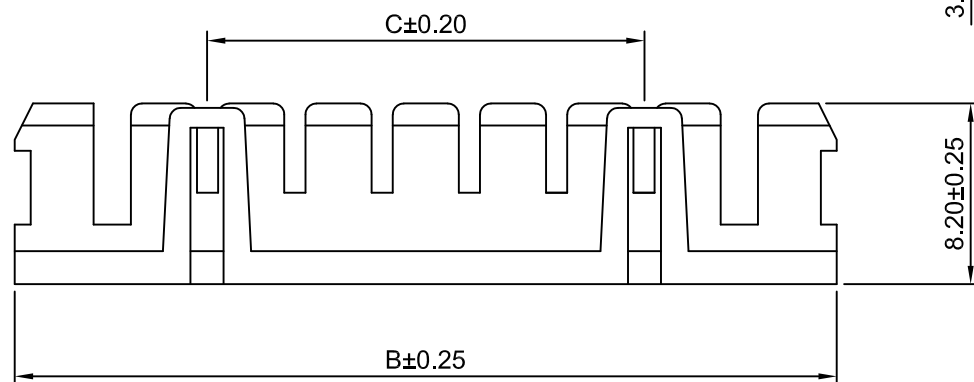

C±0.20

8.20±0.25

B±0.25

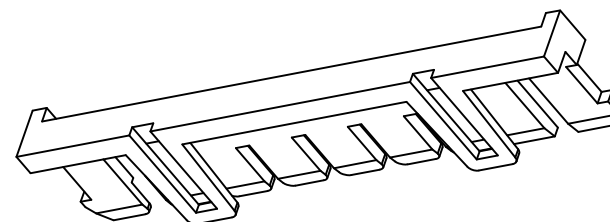


8.10±0.25

2.66

0.90±0.15

0.60±0.15

7P~15P



8.10±0.25

2.66

0.90±0.15

2P~6P

SPECIFICATIONS:

Current Rating: 10A AC,DC(AWG #16)

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1500V AC/minute

Material: Nylon 66,UL94V-0(Red)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		
	A	B	C
2P	-----	9.58	-----
3P	-----	13.54	-----
4P	3.96	17.50	-----
5P	7.92	21.46	-----
6P	11.88	25.42	-----
7P	15.84	29.38	19.80
8P	19.80	33.34	19.80
9P	23.76	37.30	19.80
10P	27.72	41.26	19.80
11P	31.68	45.22	27.72
12P	35.64	49.18	27.72
13P	39.60	53.14	27.72
14P	43.56	57.10	27.72
15P	47.52	61.06	27.72

CJTconn				CHANGJIANG CONNECTORS CO.,LTD.	
Unit	Scale	Sheet	TITLE		
mm	3:1	1 of 1	3.96mm PITCH		
DRWN	CHK'D	APPR	Interface Seal		
Wenmin Luo	DianKui Wan	Jack Yin			
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO.		REV
x.xx±0.25			A3963S-XP		A1
x.xxx±0.20					
x.xxxx±0.15					
ANGLES ±1°					

Interface Seal

A3963S-XP