




2P

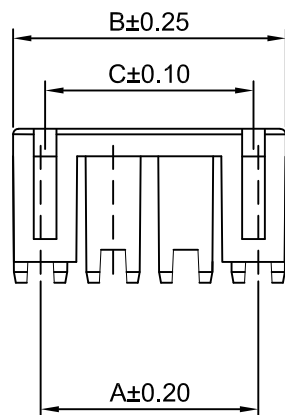

3P~8P

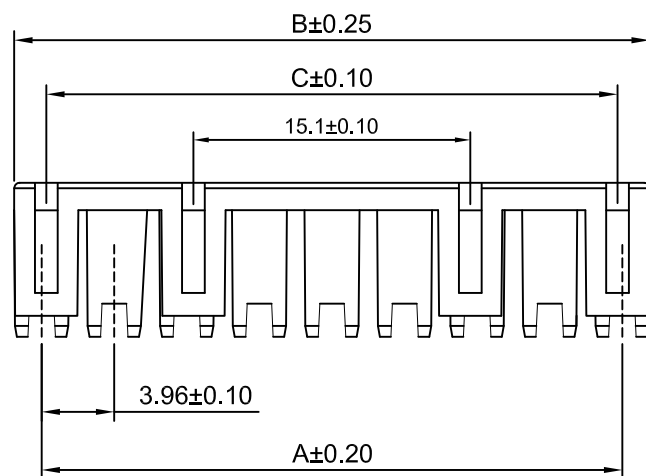

9P~15P



Ordering Information:

A3963SA-XP - **
1 2

1.Part No.

2.Material:

(Blank):Nylon 66,UL94V-0

GWT:Nylon 66,UL94V-0,GWT 750°C

SPECIFICATIONS:

Current Rating: 10A AC,DC(AWG #16)

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1500V AC/minute

Material: Nylon 66,UL94V-0(Red)

Ordering Information & Dimensions

Circuits	Dimensions(mm)			Circuits	Dimensions(mm)		
	A	B	C		A	B	C
2P	3.96	6.96	---	9P	31.68	34.68	31.20
3P	7.92	10.92	7.44	10P	35.64	38.64	35.16
4P	11.88	14.88	11.40	11P	39.60	42.60	39.12
5P	15.84	18.84	15.36	12P	43.56	46.56	43.08
6P	19.80	22.80	19.32	13P	47.52	50.52	47.04
7P	23.76	26.76	23.28	14P	51.48	54.48	51.00
8P	27.72	30.72	27.24	15P	55.44	58.44	54.96

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit Scale Sheet
mm 2.5:1 1 of 1

Draw BY: Yinzhipeng
Approved: GONGYB

Title : 3.96mm PITCH

Retainer

DRAW NO : A3963SA-XP

REV A0

General Tolerance			ANGLE±
A0	NEW RELEASE	2016.10.10	
REV	DESCRIPTION	DATE	