

Ordering Information:

A3963SD-XP - **
1 2

1.Part No.




2.Material:

(Blank): Nylon 66+15%GF,UL94V-0(Red)

GWT: Nylon 66,UL94V-0(Beige),

IEC 60335-1,5th Edition

Glow Wire Capable.

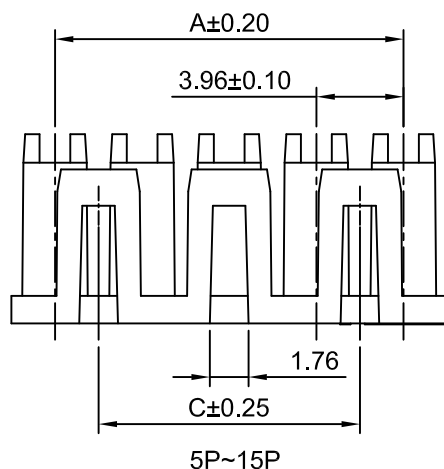

SPECIFICATIONS:

Current Rating: 10A AC,DC(AWG #16)

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C


Contact Resistance: 10mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1500V AC/minute

Ordering Information & Dimensions

Part NO.	Dimensions(mm)		
	A	B	C
A3963SD-2P	3.96	7.92	
A3963SD-3P	7.92	11.88	
A3963SD-4P	11.88	15.84	
A3963SD-5P	15.84	19.80	
A3963SD-6P	19.80	23.76	15.84
A3963SD-7P	23.76	27.72	19.80
A3963SD-8P	27.72	31.68	23.76
A3963SD-9P	31.68	35.64	27.72
A3963SD-10P	35.64	39.60	31.68
A3963SD-11P	39.60	43.56	35.64
A3963SD-12P	43.56	47.52	39.60
A3963SD-13P	47.52	51.48	43.56
A3963SD-14P	51.48	55.44	47.52
A3963SD-15P	55.44	59.40	51.48

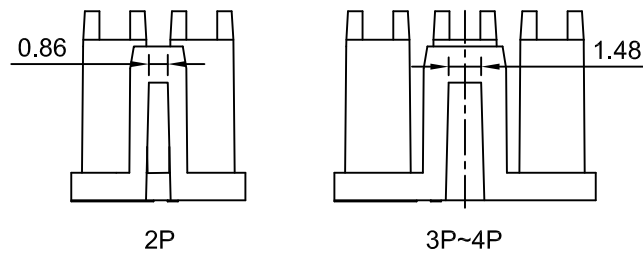

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE	
mm	3:1	1 of 1		
DRAWN	CHK'D	APPR	3.96mm PITCH	
Haisen Li	Djankui Wan	Jack Yin		
General Tolerances		THIRD ANGLE PROJECTION	Retainer	
x,xx±0.25 x,xxx±0.20 x,xxxx±0.15 ANGLES ±1°			DRAWING NO.	
			A3963SD-XP	REV A0

A0	NEW RELEASE	2015.07.01
REV	DESCRIPTION	DATE