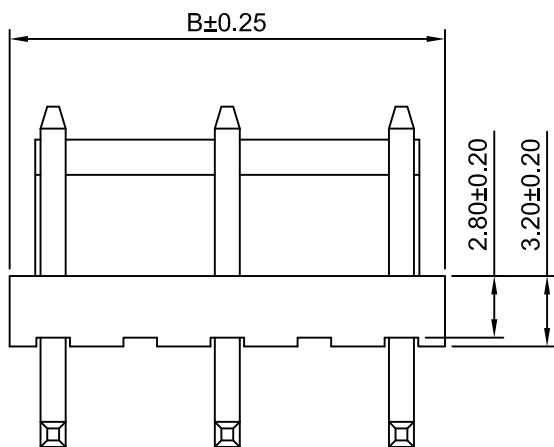
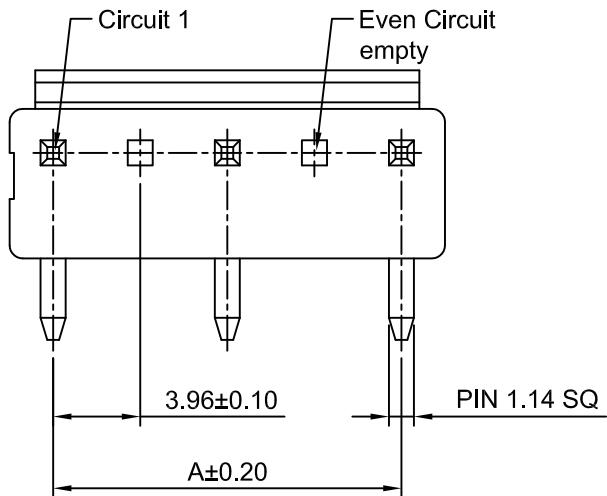


P.C.B LAYOUT
TOLERANCE:±0.05

Ordering Information:

A3963WR-XP-A - ** - ** - **
1 2 3 4

1.Part NO.

2.Material:

(blank): Nylon 66,UL94V-0(White)

GWT: Nylon 66,UL94V-0(Beige),IEC 60335-1,5th Edition

Glow Wire Capable.

3.Color:

(blank): see section 2 Material


BK: Black BL: Blue

RD: Red

4.Finish:

(blank): Tin over Nickel

G: Gold over Nickel

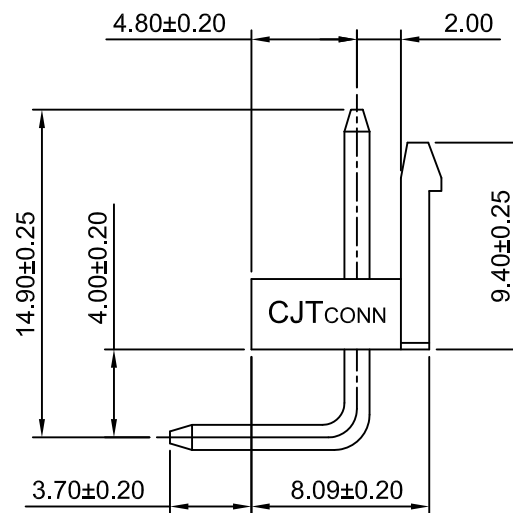

SPECIFICATIONS:

Current Rating: 10A AC,DC(AWG #16)

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1500V AC/minute

Pin Material: Brass

Material: Nylon 66,UL94V-0

Ordering Information & Dimensions

Part NO.	Dimensions(mm)	
	A	B
A3963WR-3P-A	7.92	11.88
A3963WR-5P-A	15.84	19.80
A3963WR-7P-A	23.76	27.72
A3963WR-9P-A	31.68	35.64
A3963WR-11P-A	39.60	43.56
A3963WR-13P-A	47.52	51.48
A3963WR-15P-A	55.44	59.40

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE	
mm	3:1	1 of 1		
DRWN	CHKD	APPR	3.96mm PITCH 90° WAFER	
Dengchun Yi	Djankui Wan	Jack Yin		
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO. A3963WR-XP-A	REV A1
A1	CHANGE THE DRAWING	2020.05.13		
A0	NEW RELEASE	2005.05.10		
REV	DESCRIPTION	DATE		