

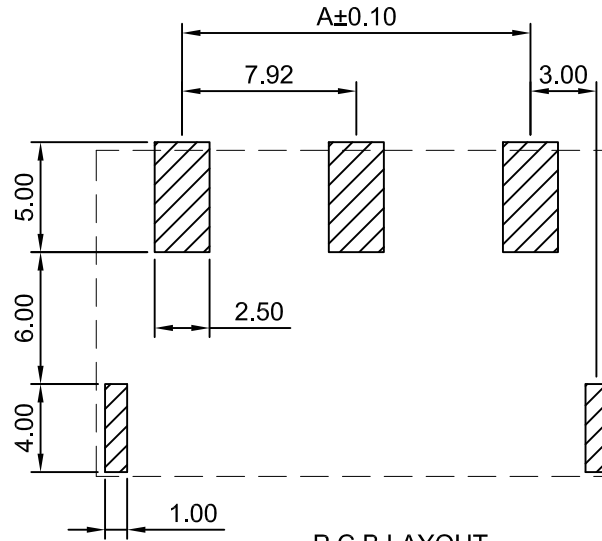
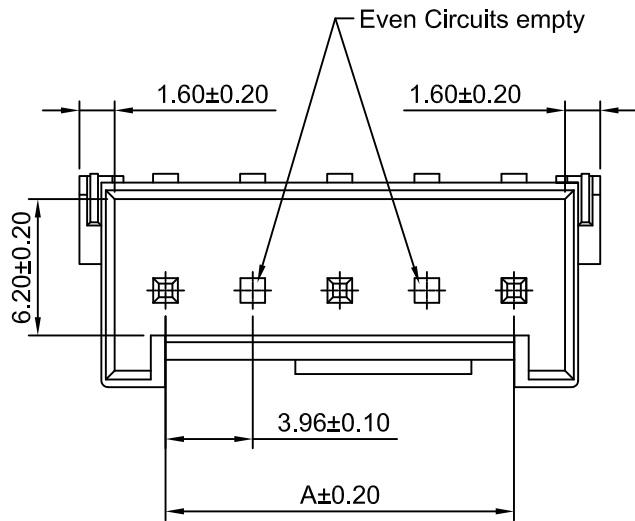


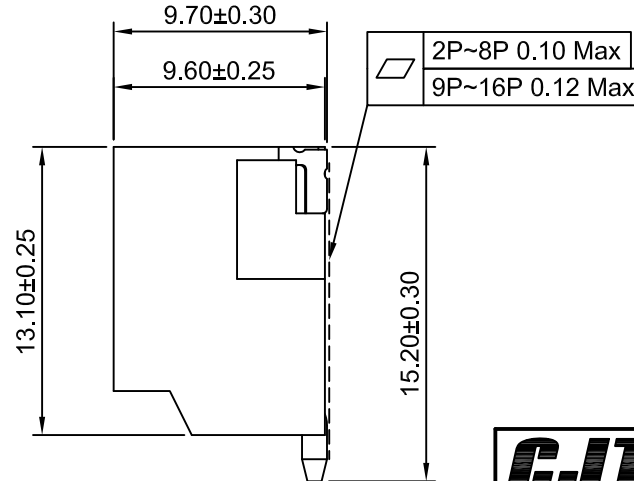

P.C.B LAYOUT
TOLERANCE:±0.05

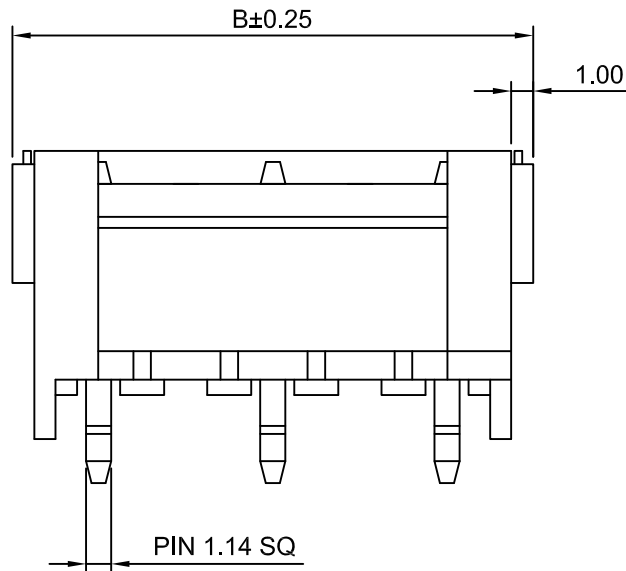

SPECIFICATIONS:

Current Rating: 10A AC,DC(AWG #16)
Voltage Rating: 250V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 10mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 1500V AC/minute
Pin Material: Brass/Tin over Nickel
Solder Tabs: Brass/Tin over Nickel
Material: Nylon 9T,UL94V-0 (Ivory)

Ordering Information & Dimensions

Part NO.	Dimensions(mm)	
	A	B
A3963WRD-S-3P-A	7.92	15.76
A3963WRD-S-5P-A	15.84	23.68
A3963WRD-S-7P-A	23.76	31.60
A3963WRD-S-9P-A	31.68	39.52
A3963WRD-S-11P-A	39.60	47.44
A3963WRD-S-13P-A	47.52	55.36
A3963WRD-S-15P-A	55.44	63.28

CJTconn


CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet
mm	3:1	1 of 1
DRWN	CHKD	APPR
Chengbiao Ye	Diankui Wan	Jack Yin

General Tolerances

x.xx±0.25
x.xxx±0.20
x.xxxx±0.15
ANGLES ±1°

THIRD ANGLE
PROJECTION



TITLE		
3.96mm PITCH 90° WAFER - SMD TYPE		
DRAWING NO.		REV
A3963WRD-S-XP-A		A0

A0	NEW RELEASE	2014.05.21
REV	DESCRIPTION	DATE