

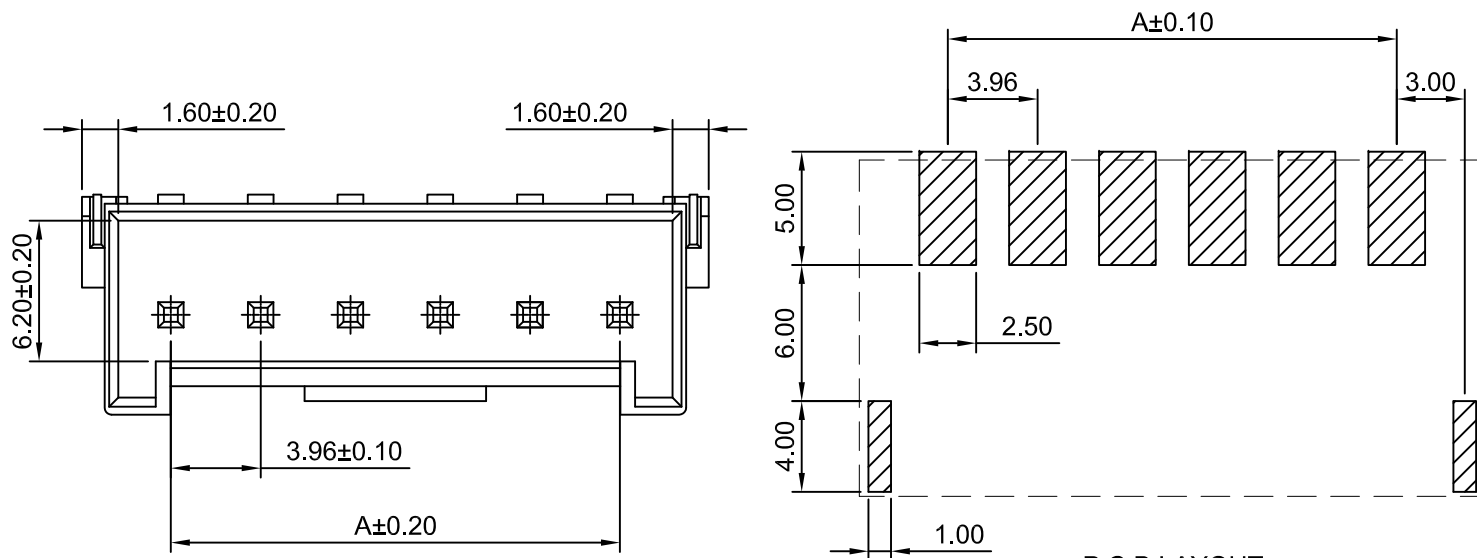


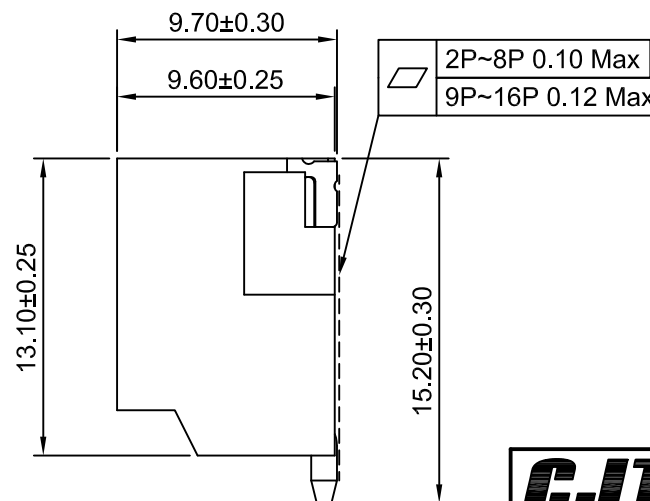

P.C.B LAYOUT
TOLERANCE:±0.05

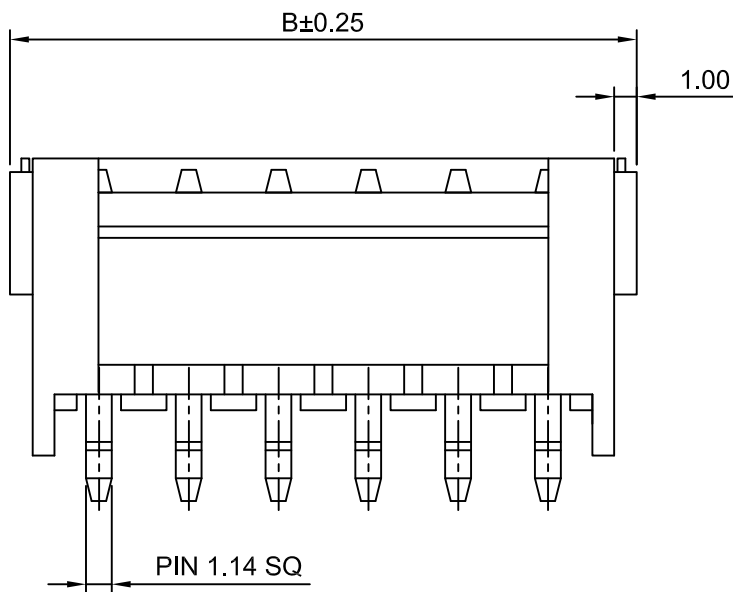

SPECIFICATIONS:

Current Rating: 10A AC,DC(AWG #16)
Voltage Rating: 250V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 10mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 1500V AC/minute
Pin Material: Brass/Tin over Nickel
Solder Tabs: Brass/Tin over Nickel
Material: Nylon 9T,UL94V-0 (Ivory)

Ordering Information & Dimensions

Part NO.	Dimensions(mm)	
	A	B
A3963WRD-S-2P	3.96	11.80
A3963WRD-S-3P	7.92	15.76
A3963WRD-S-4P	11.88	19.72
A3963WRD-S-5P	15.84	23.68
A3963WRD-S-6P	19.80	27.64
A3963WRD-S-7P	23.76	31.60
A3963WRD-S-8P	27.72	35.56
A3963WRD-S-9P	31.68	39.52
A3963WRD-S- 10P	35.64	43.48
A3963WRD-S- 11P	39.60	47.44
A3963WRD-S- 12P	43.56	51.40
A3963WRD-S- 13P	47.52	55.36
A3963WRD-S- 14P	51.48	59.32
A3963WRD-S- 15P	55.44	63.28
A3963WRD-S- 16P	59.40	67.24

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE	
mm	3:1	1 of 1	3.96mm PITCH	
DRWN	CHK'D	APPR	90° WAFER - SMD TYPE	
Dengchun Yi	Diankui Wan	Jack Yin	DRAWING NO.	
General Tolerances			THIRD ANGLE PROJECTION	
x,x±0.25 x,x,x±0.20 x,x,x,x±0.15 ANGLES ±1°			A3963WRD-S-XP	
A1	MODIFY DRAWING	2022.11.15	REV	
A0	NEW RELEASE	2014.05.21	A1	
REV	DESCRIPTION	DATE		