
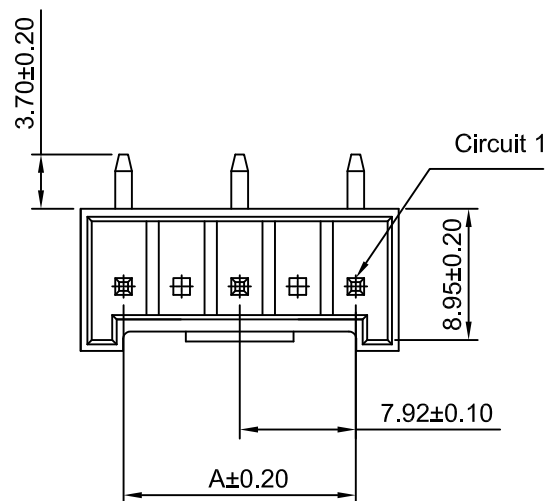
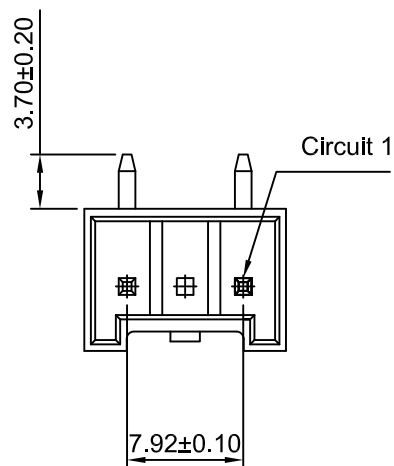


P.C.B LAYOUT



SPECIFICATIONS:

Current Rating: 10A AC,DC(AWG #16)

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max

Insulation Resistance: 1000MΩ Min


Withstanding Voltage: 1500V AC/minute

Pin Material: Brass/Tin over Nickel


Material: PBT+30%GF,UL94V-0(White)

Ordering Information & Dimensions


Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
3P	7.92	13.76	11P	39.60	45.44
5P	15.84	21.68	13P	47.52	53.36
7P	23.76	29.60	15P	55.44	61.28
9P	31.68	37.52			

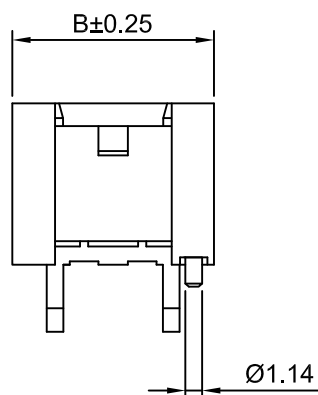

3P

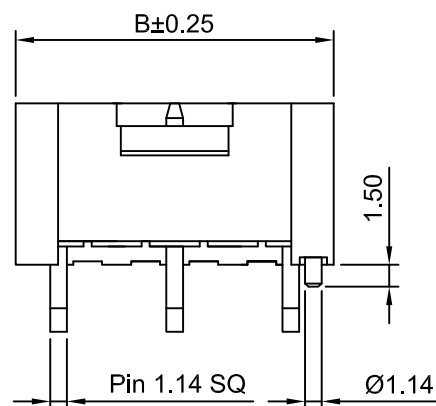

5~15P



CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit: mm, Scale: 2:1, Sheet: 1 of 1

Draw BY: LIZQ, Approved: GONGYB

General Tolerance

ANGLE±, x.x≤0.25, x.xx≤0.20, x.xxx≤0.15

Title: 7.92mm PITCH, 90° WAFER

DRAW NO: A3963WRD-XP-A, REV A0

REV	DESCRIPTION	DATE
A0	NEW RELEASE	2013.12.24