
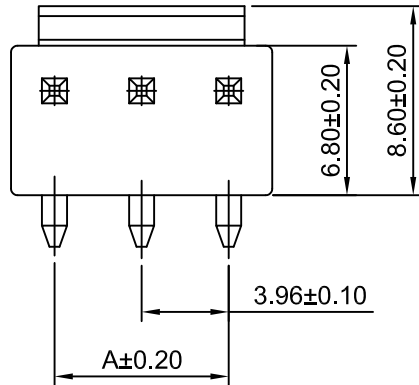
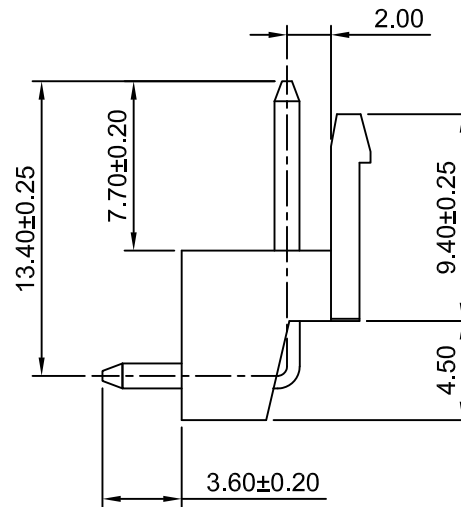


P.C.B LAYOUT

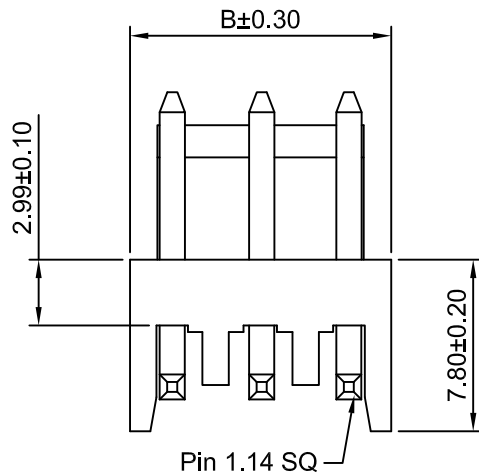

Ordering Information:

A3963WRH-XP - *** - ***
1 2 3

1.Part NO.

2.Material:

(Blank): Nylon 66,UL94V-0

GWT: Nylon 66,UL94V-0(Beige),IEC 60335-1,5th Edition
Glow Wire Capable.

3.Finish:

(Blank): Tin over Nickel

G: Gold over Nickel

SPECIFICATIONS:

Current Rating: 10A AC,DC(AWG #16)

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1500V AC/minute

Pin Material: Brass/Tin over Nickel

Material: Nylon 66,UL94V-0(White)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2P	3.96	7.92	9P	31.68	35.64
3P	7.92	11.88	10P	35.64	39.60
4P	11.88	15.84	11P	39.60	43.56
5P	15.84	19.80	12P	43.56	47.52
6P	19.80	23.76	13P	47.52	51.48
7P	23.76	27.72	14P	51.48	55.44
8P	27.72	31.68	15P	55.44	59.40

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit: mm
Scale: 3:1
Sheet: 1 of 1

Draw BY: LIZQ
Approved: GONGYB

General Tolerance

x.xx±0.25
x.xx±0.20
x.xxx±0.15



Title :

3.96mm PITCH

90° WAFER

DRAW NO : A3963WRH-XP

REV
A0

A0	NEW RELEEASE	2005.05.10
REV	DESCRIPTION	DATE