
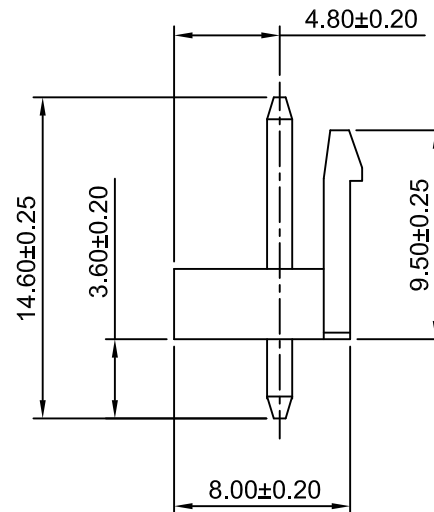
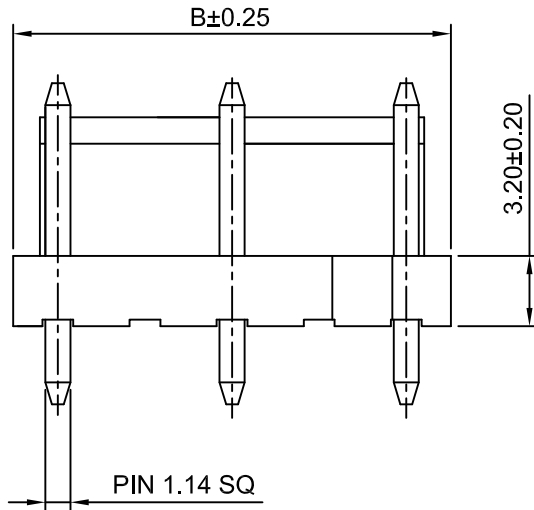
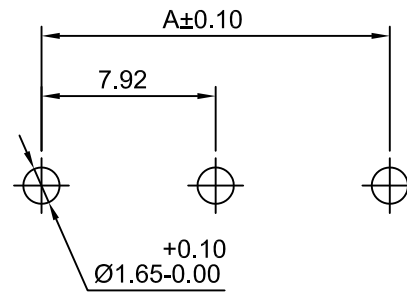


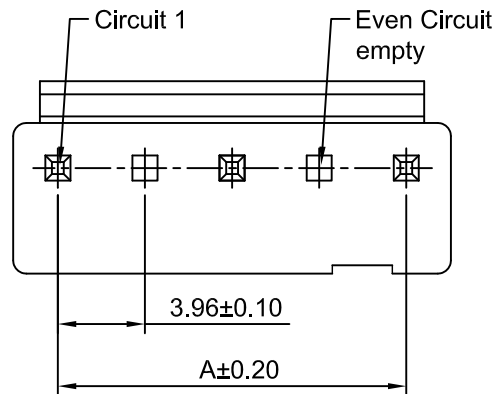

Ordering Information:

A3963WV-XP-A - *** - ** - *

1. Part NO.

2. Material:

(Blank): Nylon 66, UL94V-0(White)

GWT: Nylon 66, UL94V-0(Beige),

IEC 60335-1, 5th Edition

Glow Wire Capable.

3. Color:

(Blank): see section 2 Material

BK: Black BL: Blue

RD: Red

4. Finish:

(Blank): Tin over Nickel

G: Gold over Nickel

SPECIFICATIONS:

Current Rating: 10A AC, DC(MAX)

Voltage Rating: 250V AC, DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1500V AC/minute

Pin Material: Brass/Tin over Nickel

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
3P	7.92	11.88	11P	39.60	43.56
5P	15.84	19.80	13P	47.52	51.48
7P	23.76	27.72	15P	55.44	59.40
9P	31.68	35.64			

CJTconn

CHANGJIANG CONNECTORS CO., LTD.

Unit			Scale			Sheet			TITLE 3.96mm PITCH VERTICAL WAFER		
mm			1:1			1 of 1					
DRWN			CHK'D			APPR					
Dengchun Yi			Djankui Wan			Jack Yin					
General Tolerances			THIRD ANGLE PROJECTION			DRAWING NO. A3963WV-XP-A					
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°											
REV			DESCRIPTION			DATE			REV A2		