
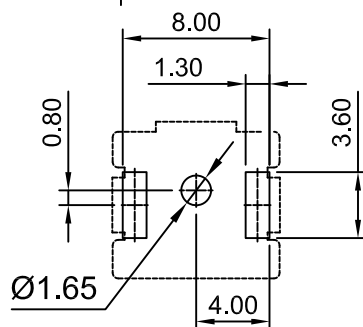
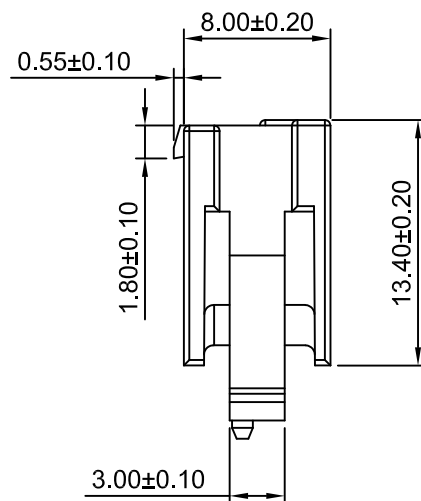
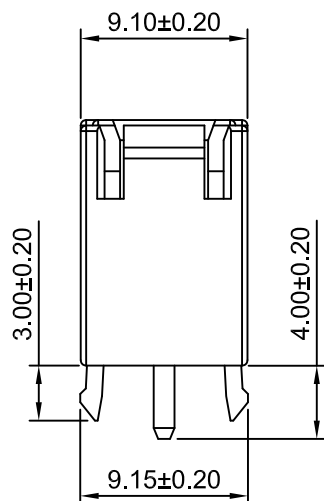

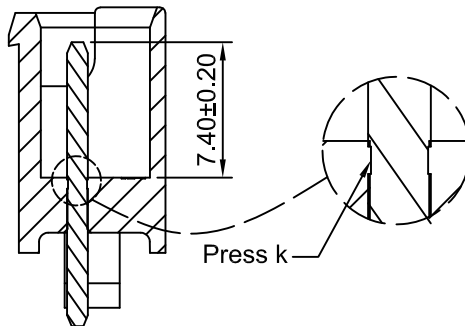




P.C.B LAYOUT
TOLERANCE:±0.05

Ordering Information:

A3963WVD-F-1P-H - $\frac{***}{1}$ - $\frac{***}{2}$ - $\frac{***}{3}$ - $\frac{***}{4}$ - $\frac{***}{5}$

1.Part NO.

2.Material:

(Blank): PBT,UL94V-0(White)

6T: Nylon 6T,UL94V-0(Beige)

IEC 60335-1,5th Edition Glow Wire Capable.

3.Color:

(Blank): See Section 2 materia

BK: Black RD: Red

BL: Blue OR: Orange

YL: Yellow GY: Gray

GN: Green PK: Pink

4.Finish:

(Blank): Tin over Nickel

G: Gold over Nickel

5.Packing:

(Blank): Bag

SPECIFICATIONS:

Current Rating: 10A AC,DC(AWG #16)

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max.

Insulation Resistance: 1000MΩ Min.

Withstanding Voltage: 1500V AC/minute

Pin Material: Brass

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit		Scale		Sheet		TITLE
mm		2.5:1		1 of 1		
DRAWN		CHK'D		APPR'D		
Halsen Li		Dlankul Wan		Jack Yin		
General Tolerances				THIRD ANGLE PROJECTION		DRAWING NO. A3963WVD-F-1P-H
x.xx±0.25						
x.xxx±0.20						
x.xxxx±0.15 ANGLES ±1°						
0						REV A0

A0	NEW RELEASE	2024.09.10
REV	DESCRIPTION	DATE