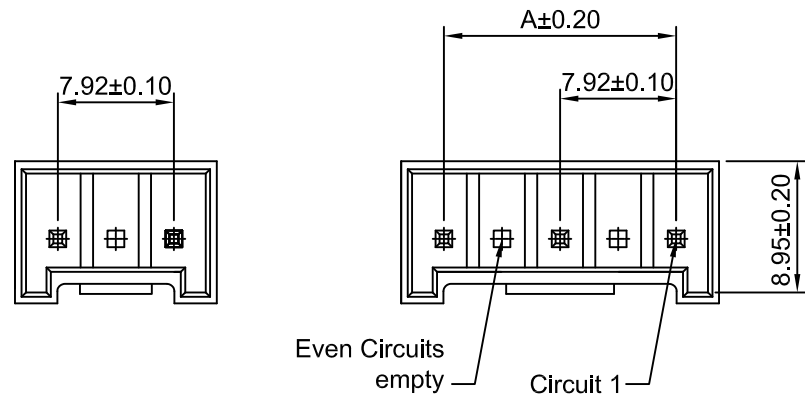


P.C.B LAYOUT
TOLERANCE:±0.05

Ordering Information:

A3963WVD-F-XP-H-A - *** - *** - ***
1 2 3 4

1.Part NO.

2.Material:

(Blank): PBT,UL94V-0(White)

GWT: Nylon 66,UL94V-0(Beige),IEC 60335-1,5th Edition

Glow Wire Capable.

46: Nylon 46,UL94V-0(Beige)

6T: Nylon 6T,UL94V-0(Beige)

3.Color:

(Blank): White

BK: Black

YL: Yellow

RD: Red

OR: Orange

BL: Blue

PK: Pink


GN: Green

GY: Gray


4.Finish:

(Blank): Tin over Nickel


G: Gold over Nickel

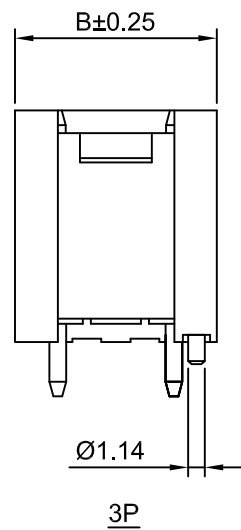

3P

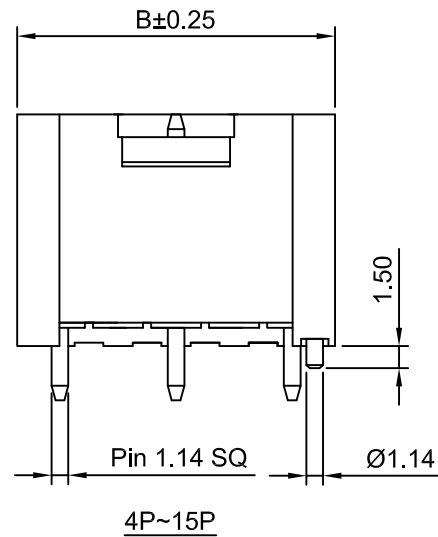

4P~15P

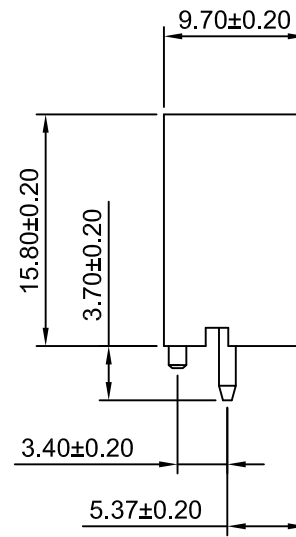

SPECIFICATIONS:

Current Rating: 10A AC,DC(AWG #16)

Voltage Rating: 250V AC,DC

Temperature Range: -25°C ~ +85°C

Contact Resistance: 10mΩ Max


Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1500V AC/minute

Pin Material: Brass

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
3P	7.92	13.76	11P	39.60	45.44
5P	15.84	21.68	13P	47.52	53.36
7P	23.76	29.60	15P	55.44	61.28
9P	31.68	37.52			



CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit			Scale			Sheet			TITLE		
mm			2:1			1 of 1					
DRWN			CHKD			APPR			7.92mm PITCH VERTICAL DIP HEADER		
Dengchun Yi			Djankui Wan			Jack Yin					
General Tolerances			THIRD ANGLE PROJECTION			DRAWING NO. A3963WVD-F-XP-H-A			REV A2		
x.xx±0.25 x.xx±0.20 x.xxx±0.15 ANGLES ±1°											

A2	MODIFY DRAWING	2021.08.14
A1	UPDATE THE SIZE	2017.04.20
A0	NEW RELEASE	2005.05.24
REV	DESCRIPTION	DATE