
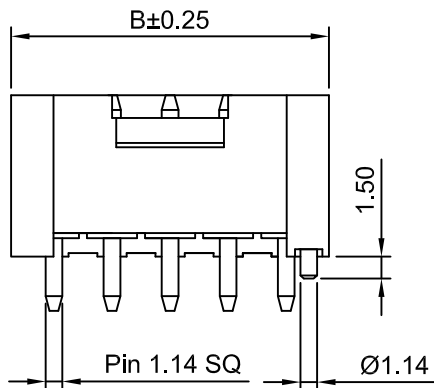
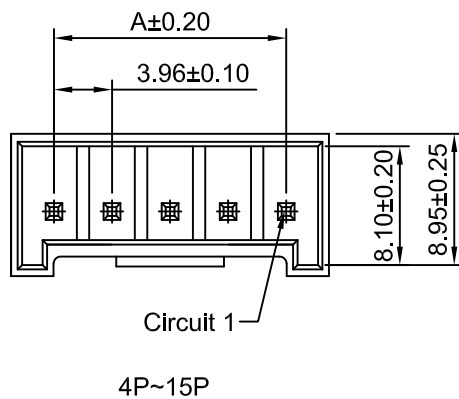


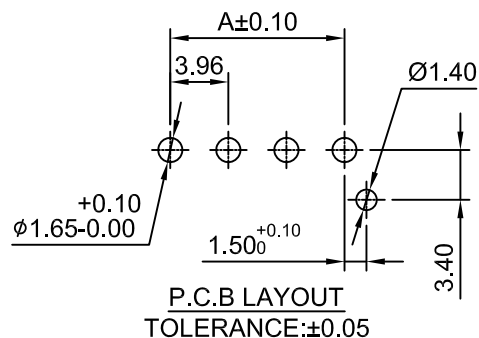

Ordering Information:

A3963WVD-F-XP - *** - *** - *** - ***
1 2 3 4 5

1.Part NO.

2.Material:

(Blank): PBT,UL94V-0(White)

GWT: Nylon 66,UL94V-0(Beige),IEC 60335-1,5th Edition
Glow Wire Capable.

46: Nylon 46,UL94V-0(Beige)

6T: Nylon 6T,UL94V-0(Beige)

3.Color:

(Blank): White

BK: Black

YL: Yellow

RD: Red

OR: Orange

BL: Blue

PK: Pink

GN: Green

GY: Gray

4.Finish:

(Blank): Tin over Nickel



G: Gold over Nickel

G3: Gold over Nickel (Au:3u"Mating area)

5.Void position:

(Blank): Full positions

N*.*: Void position(select Arbitrary numbers)

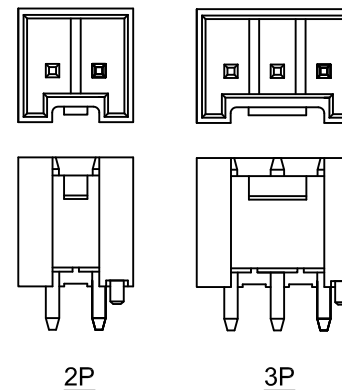

SPECIFICATIONS:

Current Rating: 10A AC,DC(AWG #16)

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1500V AC/minute

Pin Material: Brass

Ordering Information & Dimensions

Part No	Dimensions (mm)		Part No	Dimensions (mm)	
	A	B		A	B
A3963WVD-F-2P	3.96	9.80	A3963WVD-F-9P	31.68	37.52
A3963WVD-F-3P	7.92	13.76	A3963WVD-F-10P	35.64	41.48
A3963WVD-F-4P	11.88	17.72	A3963WVD-F-11P	39.60	45.44
A3963WVD-F-5P	15.84	21.68	A3963WVD-F-12P	43.56	49.40
A3963WVD-F-6P	19.80	25.64	A3963WVD-F-13P	47.52	53.36
A3963WVD-F-7P	23.76	29.60	A3963WVD-F-14P	51.48	57.32
A3963WVD-F-8P	27.72	33.56	A3963WVD-F-15P	55.44	61.28

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

	Unit	Scale	Sheet	TITLE	
	mm	2:1	1 of 1		
	DRWN	CHK'D	APPR	3.96mm PITCH VERTICAL DIP HEADER	
3	Dengchun Yi	Diankui Wan	Jack Yin		
4	General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO. A3963WVD-F-XP	
0	x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°				
4				REV A3	

A3	CHANGE THE DRAWING	2022.01.13
A2	MODIFY DRAWING	2021.08.14
A1	UPDATE THE SIZE	2017.04.20
A0	NEW RELEASE	2005.05.24
REV	DESCRIPTION	DATE