
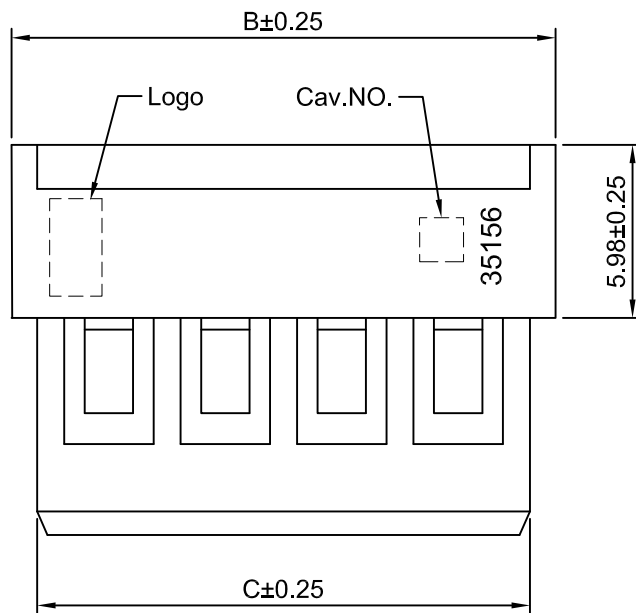
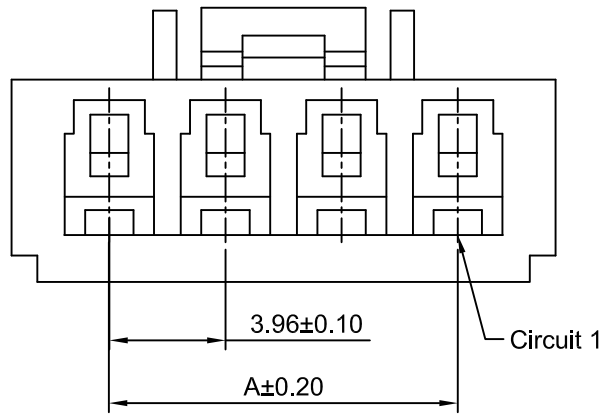
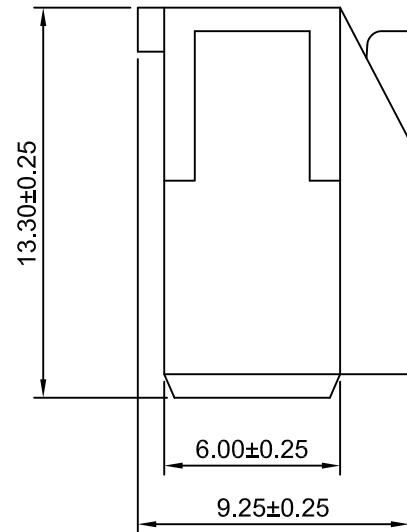


2P



3P~15P

Ordering Information:

A3965H-XP - ***

1 2

1.Part NO.

2.Material:

(Blank): Nylon 66,UL94V-0(White)

GWT: Nylon 66,UL94V-0(Beige),IEC 60335-1,5th
Edition Glow Wire Capable.

SPECIFICATIONS:

Current Rating: 7A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1500V AC/minute

Ordering Information & Dimensions

Part NO.	Dimensions(mm)		
	A	B	C
A3965H-2P	3.96	10.58	8.88
A3965H-3P	7.92	14.54	12.84
A3965H-4P	11.88	18.50	16.80
A3965H-5P	15.84	22.46	20.76
A3965H-6P	19.80	26.42	24.72
A3965H-7P	23.76	30.38	28.68
A3965H-8P	27.72	34.34	32.64
A3965H-9P	31.68	38.30	36.60
A3965H-10P	35.64	42.26	40.56
A3965H-11P	39.60	46.22	44.52
A3965H-12P	43.56	50.18	48.48
A3965H-13P	47.52	54.14	52.44
A3965H-14P	51.48	58.10	56.40
A3965H-15P	55.44	62.06	60.36

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE	
mm	4:1	1 of 1		
DRWN	CHKD	APPR	3.96mm PITCH HOUSING	
Dengchun Yi	Djankui Wan	Jack Yin		
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO. A3965H-XP	REV A1
A1	MODIFY DRAWING	2023.01.29		
A0	NEW RELEASE	2009.05.10		
REV	DESCRIPTION	DATE		

x.x±0.25
x.xx±0.20
x.xxx±0.15
ANGLES ±1°

