
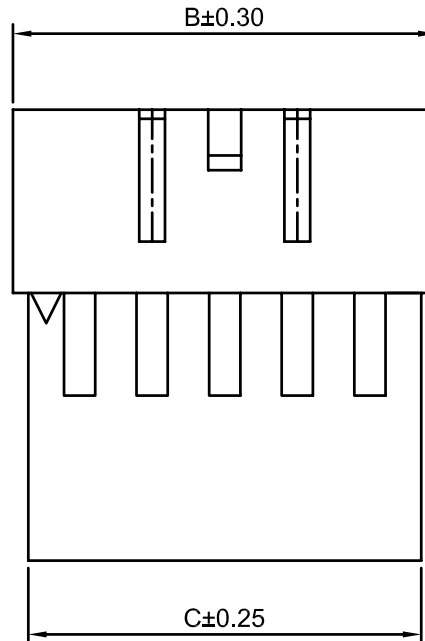
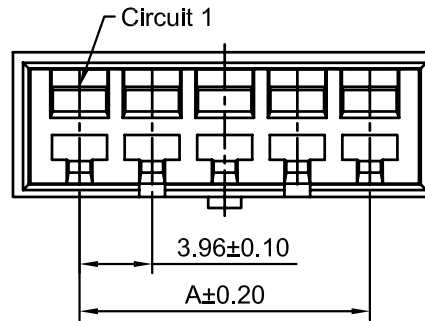


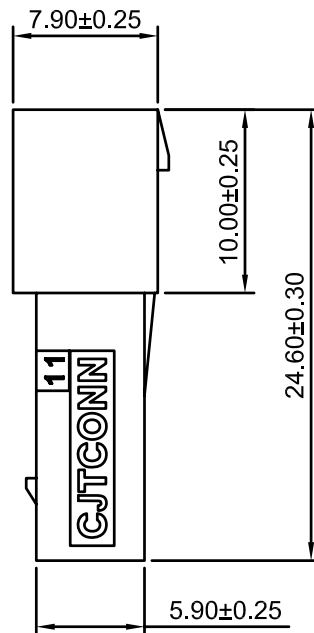

SPECIFICATIONS:

Current Rating: 7A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 10mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 1500V AC/minute
Material: Nylon 66,UL94V-0,GWT 750°C(White)

Ordering Information & Dimensions

Circuits	Dimensions(mm)			Circuits	Dimensions(mm)		
	A	B	C		A	B	C
2P	3.96	11.22	9.56	9P	31.68	38.94	37.28
3P	7.92	15.18	13.52	10P	35.64	42.90	41.24
4P	11.88	19.14	17.48	11P	39.60	46.86	45.20
5P	15.84	23.10	21.44	12P	43.56	50.82	49.16
6P	19.80	27.06	25.40	13P	47.52	54.78	53.12
7P	23.76	31.02	29.36	14P	51.48	58.74	57.08
8P	27.72	34.98	33.32	15P	55.44	62.70	61.04

GJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet
mm	2.5:1	1 of 1
Draw BY:	Approved :	
Tony Su	Jack Yin	

Title :		3.96mm PITCH	
		HOUSING	
DRAW NO :		A3965HM-XP-GWT	REV A0

General Tolerance		ANGLE±	
A0	NEW RELEASE	2009.05.10	x.x≤0.25
REV	DESCRIPTION	DATE	x.xx≤0.20
			x.xxx≤0.15