

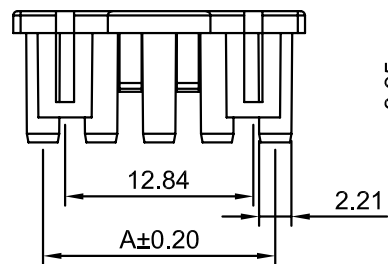
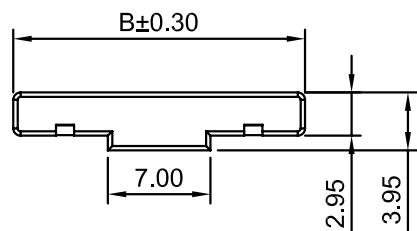



2P

3P~4P

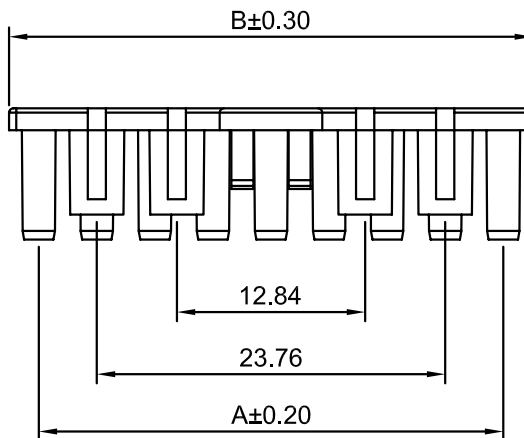

5P~8P



9P~15P

SPECIFICATIONS:

Current Rating: 7A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 10mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 1500V AC/minute
Material: Nylon 66,UL94V-0(Brick Red)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2P	3.96	8.02	9P	31.68	35.74
3P	7.92	11.98	10P	35.64	39.70
4P	11.88	15.94	11P	39.60	43.66
5P	15.84	19.90	12P	43.56	47.62
6P	19.80	23.86	13P	47.52	51.58
7P	23.76	27.82	14P	51.48	55.54
8P	27.72	31.78	15P	55.44	59.50

CJT

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet
mm	2:1	1 of 1
Draw BY:		Approved :
Yinzhipei		GONGYB

Title :
3.96mm PITCH
Retainer

General Tolerance			ANGLE±	DRAW NO :	REV
A1	Change drawings	2015.06.03			
A0	NEW RELEASE	2014.04.21	x.x≤0.25 x.xx≤0.20 x.xxx≤0.15	A3965S-XP	A0
REV	DESCRIPTION	DATE			