


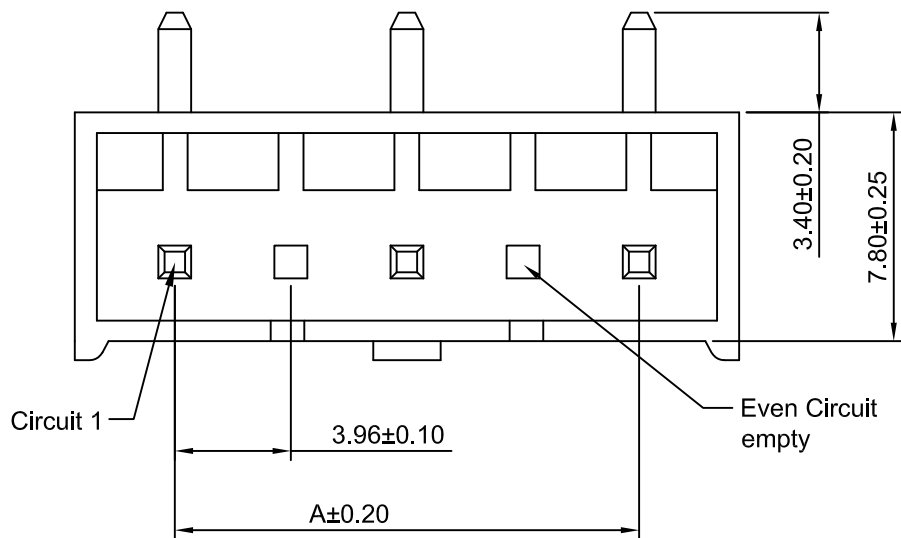

Ordering Information:


A3965WR-XP-A - ***
1 2

1.Part NO.

2.Material:

(Blank): Nylon 66,UL94V-0(White)

GWT: Nylon 66,UL94V-0(Beige),
IEC 60335-1,5th Edition
Glow Wire Capable.

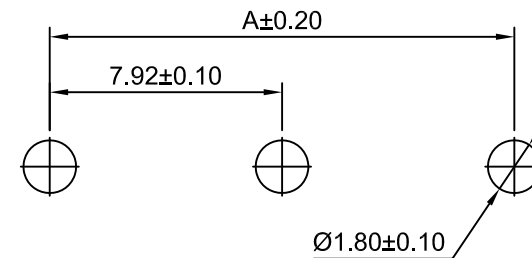

P.C.B LAYOUT

SPECIFICATIONS:

Current Rating: 7A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$

Contact Resistance: $10\text{m}\Omega$ Max

Insulation Resistance: $1000\text{M}\Omega$ Min



Withstanding Voltage: 1500V AC/minute

Pin Material: Brass/Tin over Nickel

Material: Nylon 66,UL94V-0(White)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
3P	7.92	15.34	11P	39.60	47.02
5P	15.84	23.26	13P	47.52	54.94
7P	23.76	31.18	15P	55.44	62.86
9P	31.68	39.10	ÄΣ	Ä	ÄΣ

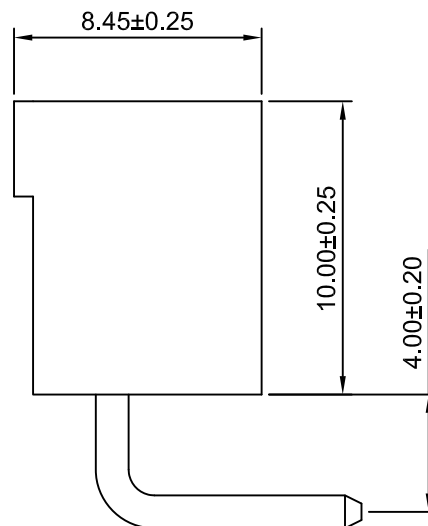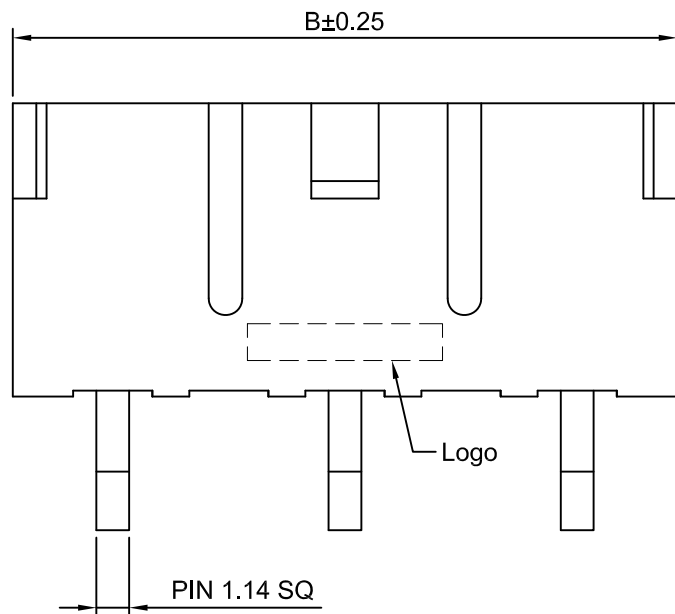

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE	
mm	4:1	1 of 1	3.96mm PITCH RIGHT-ANGLE WAFER	
DRAWN	CHK'D	APPR	DRAWING NO.	
Halsen Li	Dlankul Wan	Jack Yin	A3965WR-XP-A	
General Tolerances			THIRD ANGLE PROJECTION	
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°			REV A0	

REV	DESCRIPTION	DATE
A0	NEW RELEASE	2022.08.26