


Ordering Information:

A4001HG-XP - **
1 2

1.Part NO.



2.Style:

(Blank): Type A (Blue)

B1: Type B (Yellow)

C1: Type C (Red)

D1: Type D (Black)

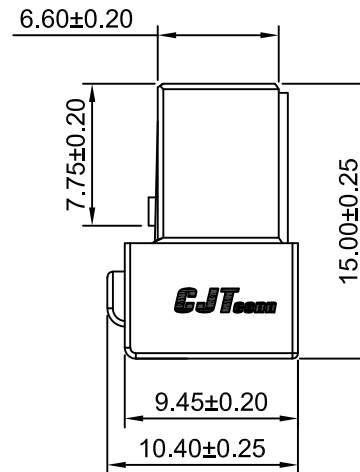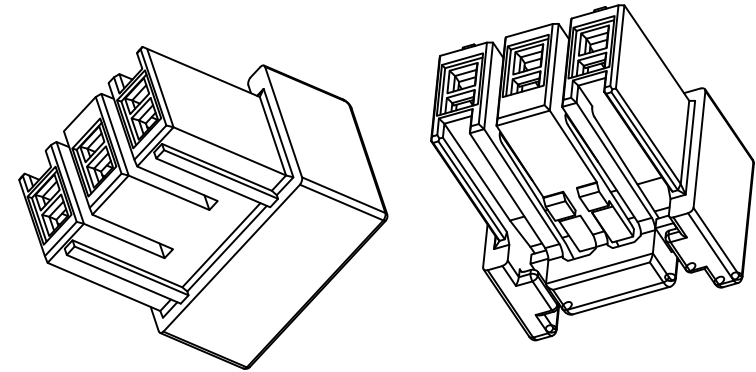

SPECIFICATIONS:

Current Rating: 12A AC,DC

(When used with the A4001WVG-F-3P-D1-A PAD, the maximum current is up to 15A and the rated voltage is up to 600V.)

Voltage Rating: 300V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 20mΩ Max.

Insulation Resistance: 1000MΩ Min.



Withstanding Voltage: 1500V AC/minute

Material: PBT UL94V-0


Ordering Information & Dimensions

Part NO.	Dimensions(mm)	
	A	B
A4001HG-2P	4.00	8.80
A4001HG-3P	8.00	12.80
A4001HG-4P	12.00	16.80
A4001HG-5P	16.00	20.80


CJTconn CHANGJIANG CONNECTORS CO.,LTD.			
Unit	Scale	Sheet	TITLE
mm	2.5:1	1 of 2	4.00mm PITCH HOUSING
DRWN	CHKD	APPR	
Wenmin Luo	DianKui Wan	Jack Yin	
General Tolerances		THIRD ANGLE PROJECTION	
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°			DRAWING NO.
			A4001HG-XP
			REV A0

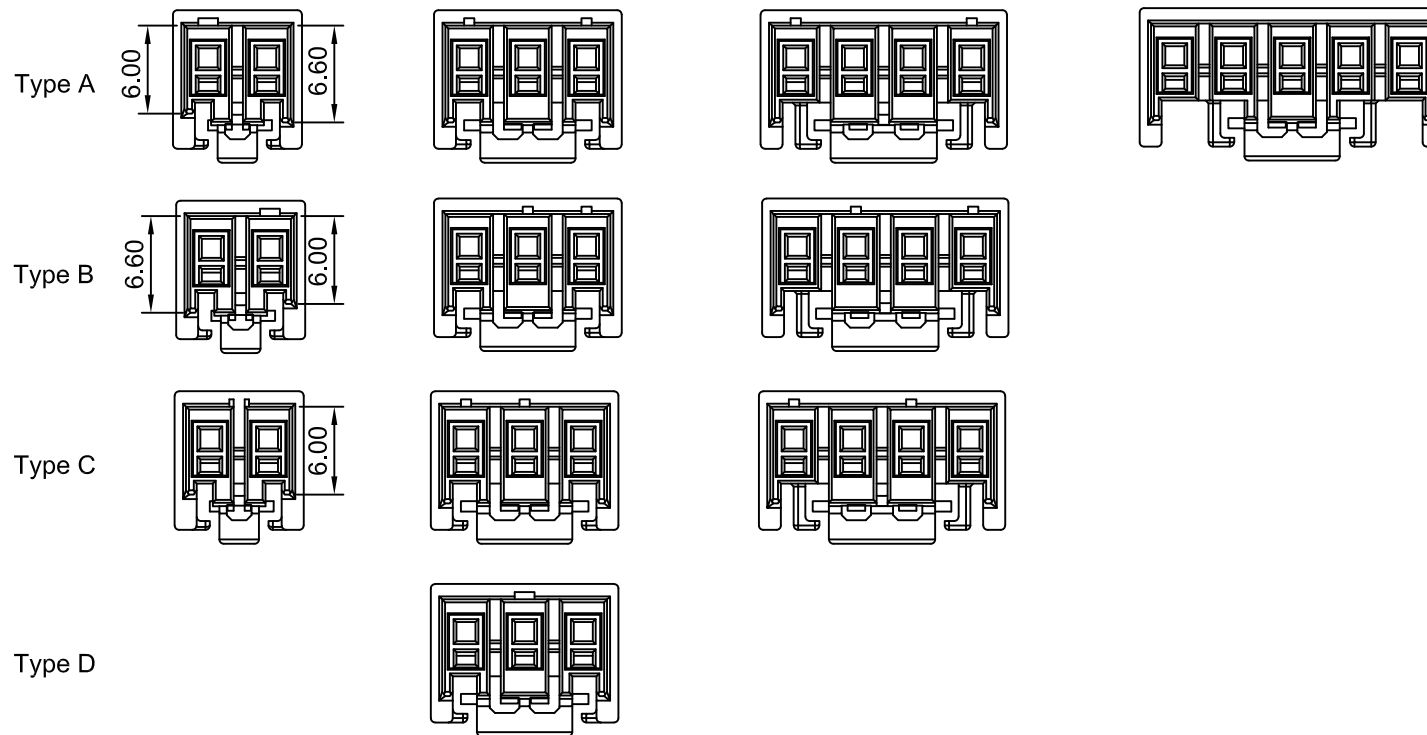


2P



3P



4P



5P

CJTconn			CHANGJIANG CONNECTORS CO.,LTD.	
Unit	Scale	Sheet	TITLE	
mm	2.5:1	2 of 2	4.00mm PITCH HOUSING	
DRWN	CHK'D	APPR		
Wenmin Luo	DianKui Wan	Jack Yin		
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO.	REV A0
x,x±0.25 x,x±0.20 x,xxx±0.15 ANGLES ±1°				
		A4001HG-XP		