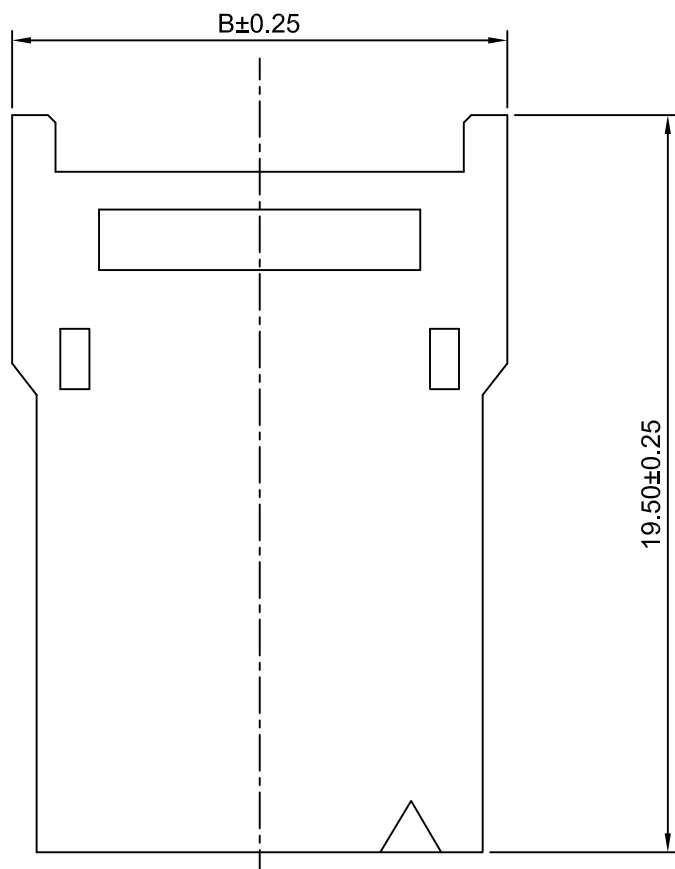
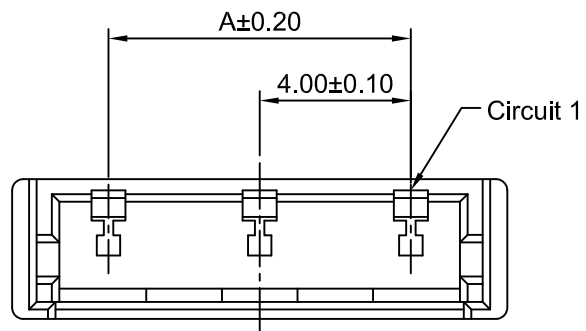


SPECIFICATIONS:

Current Rating: 1A AC,DC
Voltage Rating: 600V AC,DC
Temperature Range: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$
Contact Resistance: $10\text{m}\Omega$ Max
Insulation Resistance: $1000\text{M}\Omega$ Min
Withstanding Voltage: 1800V AC/minute
Material: Nylon 66 ,UL94V-0(White)

Ordering Information & Dimensions

Part NO.	Dimensions(mm)	
	A	B
A4001HM-2P	4.00	9.10
A4001HM-3P	8.00	13.10
A4001HM-4P	3.75	17.10
A4001HM-5P	5.00	21.10

CJTconn CHANGJIANG CONNECTORS CO.,LTD.			
Unit	Scale	Sheet	TITLE 4.00mm PITCH HOUSING
mm	5:1	1 of 1	
DRWN	CHK'D	APPR	
Dengchun Yi	Diankui Wan	Jack Yin	
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO. A4001HM-XP
x,x±0.25 x.xx±0.20 x.xxx±0.15 ANGLES ±1°			
			REV A1