Ordering Information:

A4001WRJ-F-2P- *** - ***
1 2 3

1.Part NO.
2.Seal Ring Holder Color & Style.
X:Black,KEY X
Y:Natural,KEY Y
Z:Blue,KEY Z
3.Finish.
(Blank): Tin over Nickel
G: Gold over Nickel
G15: Gold over Nickel (Au:15u",Mating Area)
G30: Gold over Nickel (Au:30u",Mating Area)

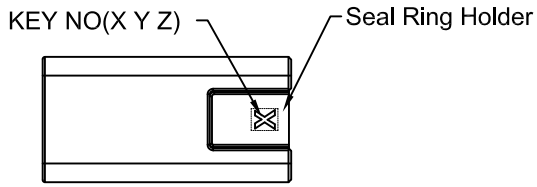

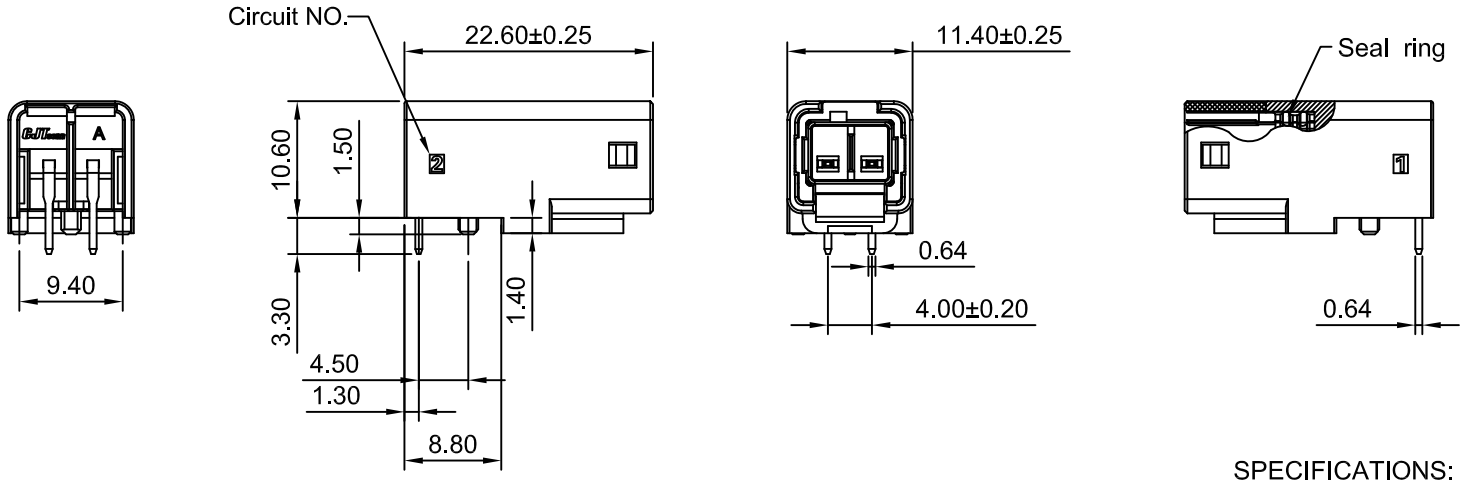

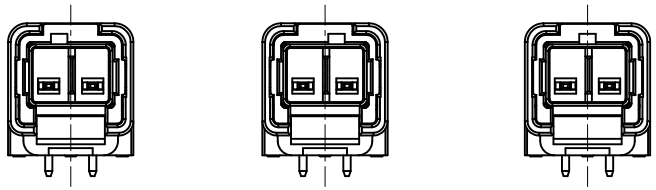

2P
KEY X

2P
KEY Y

2P
KEY Z

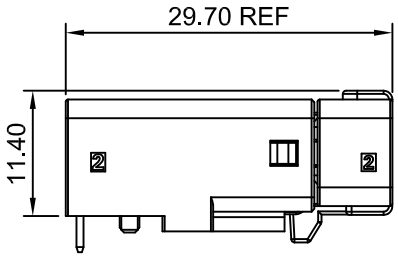

Reference Mating Condition

SPECIFICATIONS:
Current Rating: 6A AC,DC(AWG#18)
Voltage Rating: 300V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 20mΩ Max
Seal ring:Silicone rubber(Brown)
Pin Material:Copper Alloy
Housing Material:PBT+GF,UL94V-0(Black)

REV	DESCRIPTION	DATE
A0	NEW RELEASE	2022.07.30

CJTconn CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet
mm	1.5:1	1 of 2
DRAWN	CHK'D	APPR
Haisen Li	Diankui Wan	Jack Yin

General Tolerances
x.x±0.25
x.xx±0.20
x.xxx±0.15
ANGLES ±1°

THIRD ANGLE PROJECTION

TITLE
4.00mm PITCH
RIGHT-ANGLE WAFER

DRAWING NO.
A4001WRJ-F-2P

REV
A0

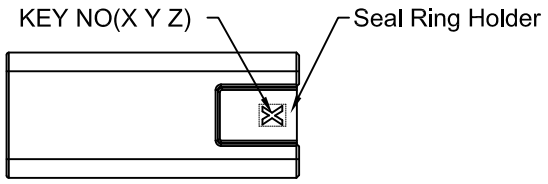

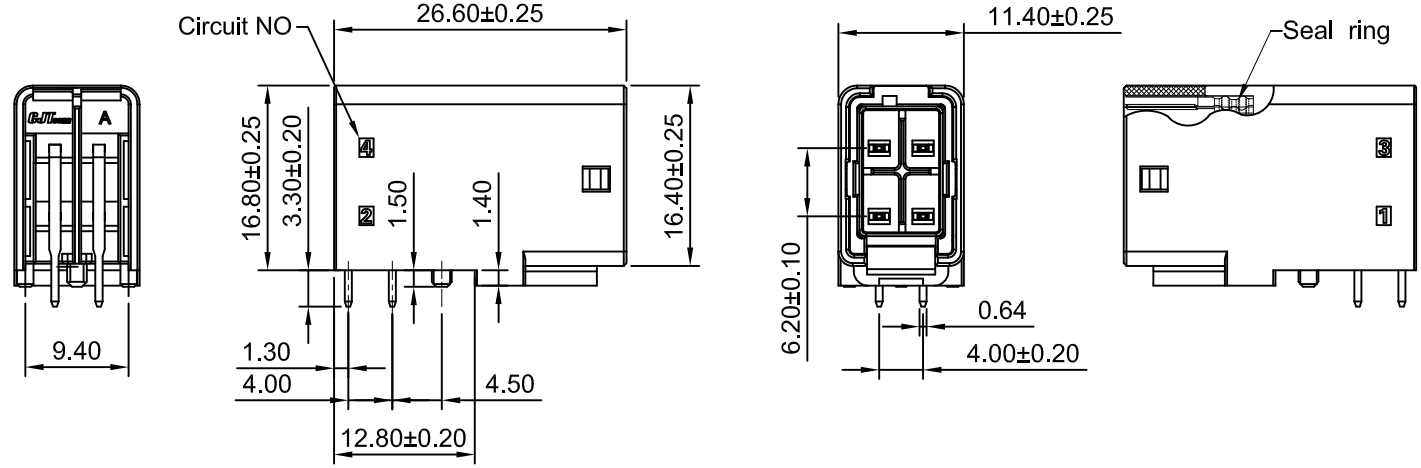

Ordering Information:

A4001WRJ-F-2x2P - *** - ***
1 2 3

1.Part NO.
2.Seal Ring Holder Color & Style.
X:Black,KEY X
Y:Natural,KEY Y
Z:Blue,KEY Z
3.Finish.
(Blank): Tin over Nickel
G: Gold over Nickel
G15: Gold over Nickel (Au:15u",Mating Area)
G30: Gold over Nickel (Au:30u",Mating Area)

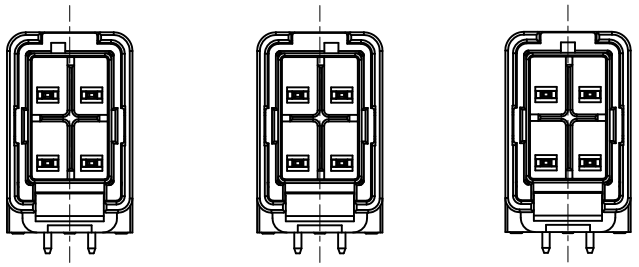

2x2P KEY X | 2x2P KEY Y | 2x2P KEY Z

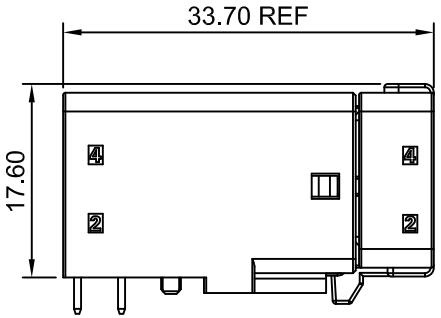

Reference Mating Condition

SPECIFICATIONS:
Current Rating: 6A AC,DC(AWG#18)
Voltage Rating: 300V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 20mΩ Max
Seal ring:Silicone rubber(Brown)
Pin Material:Copper Alloy
Housing Material:PBT+GF,UL94V-0(Black)

REV	DESCRIPTION	DATE
A0	NEW RELEASE	2022.07.30

CJTconn CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet
mm	1.5:1	1 of 1
DRAWN	CHK'D	APPR
Haisen Li	Diankui Wan	Jack Yin

General Tolerances
x.x±0.25
x.xx±0.20
x.xxx±0.15
ANGLES ±1°

THIRD ANGLE PROJECTION

TITLE
4.00x6.20mm PITCH
RIGHT-ANGLE DUAL ROW WAFER

DRAWING NO.
A4001WRJ-F-2x2P

REV
A0