

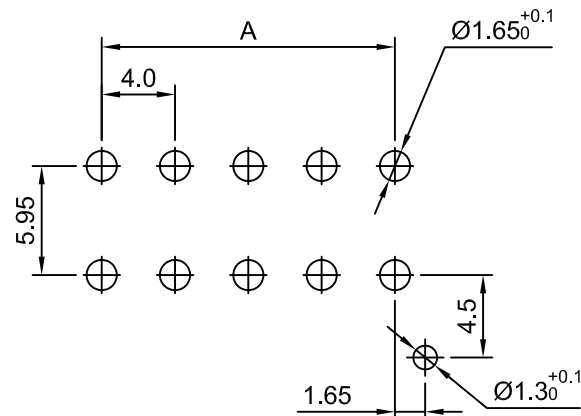
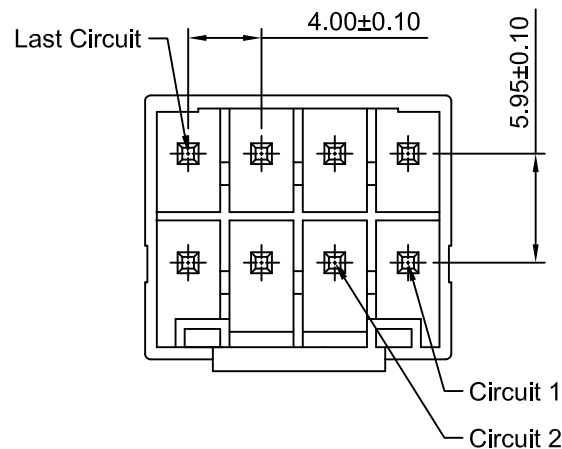


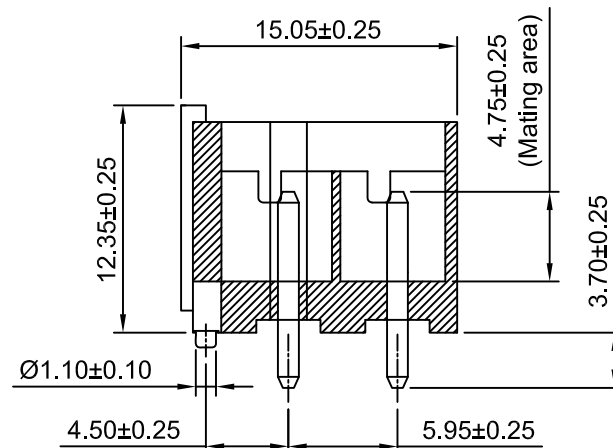

P.C.B LAYOUT
TOLERANCE:±0.05

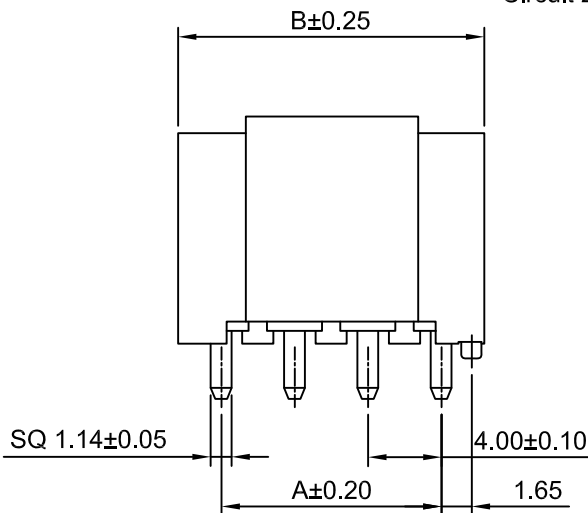

Ordering Information:

A4001WVG-F-2xXP - *** - ***
1 2 3

1.Part NO.

2.Finish:

(Blank): Tin over Nickel

G: Gold over Nickel

G3: Gold over Nickel(Au:3u"Mating area)


G15: Gold over Nickel(Au:15u"Mating area)

G30: Gold over Nickel(Au:30u"Mating area)

3.Void position:

(Blank): Full positions

N*,*,: Void position(select Arbitrary numbers)

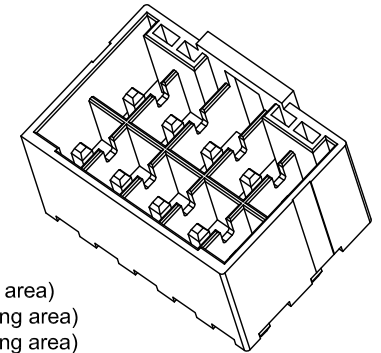

SPECIFICATIONS:

Current Rating: 12A AC,DC

Voltage Rating: 300V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 20mΩ Max.

Insulation Resistance: 1000MΩ Min.

Withstanding Voltage: 1500V AC/minute

Pin Material: Brass

Material: PBT,UL94V-0(Blue)


Ordering Information & Dimensions

Part NO.	Dimensions(mm)	
	A	B
A4001WVG-F-2x3P	8.00	12.70
A4001WVG-F-2x4P	12.00	16.70
A4001WVG-F-2x5P	16.00	20.70
A4001WVG-F-2x6P	20.00	24.70
A4001WVG-F-2x7P	24.00	28.70


CJTconn

CHANGJIANG CONNECTORS CO.,LTD.


Unit	Scale	Sheet	TITLE		
mm	2.5:1	1 of 2			
DRWN	CHK'D	APPR	4.00mm PITCH VERTICAL WAFER		
Chengbiao Ye	DianKui Wan	Jack Yin			
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO. A4001WVG-F-2xXP		REV A1
x,xx±0.25					
x,xx±0.20					
x,xxx±0.15					
ANGLES ±1°					




2x3P




2x4P

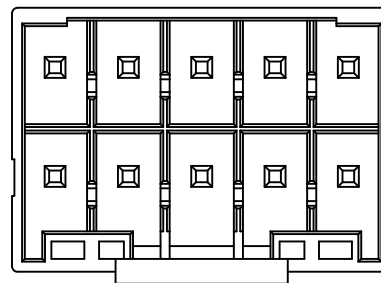

2x5P

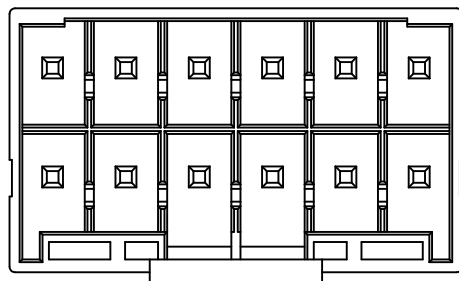

2x6P

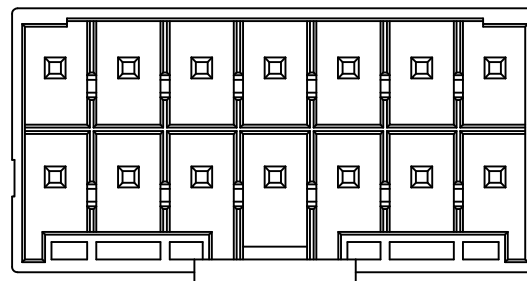

2x7P

Style	Circuits	X=Void position													
		P1	P2	P3	P4	P5	P6	P7	P8	P9	P10	P11	P12	P13	P14
N2.5	2x3P		X			X									
N2.3.6.7	2x4P		X	X			X	X							

A1	CHANGE THE DRAWING	2023.06.27
A0	NEW RELEASE	2020.07.01
REV	DESCRIPTION	DATE

CJTconn			CHANGJIANG CONNECTORS CO.,LTD
Unit	Scale	Sheet	TITLE
mm	2.5:1	2 of 2	4.00mm PITCH VERTICAL WAFER
DRWN	CHK'D	APPR	
Chengbiao Ye	DianKui Wan	Jack Yin	
General Tolerances		THIRD ANGLE PROJECTION	
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°			DRAWING NO.
			A4001WVG-F-2xXP
			REV A1