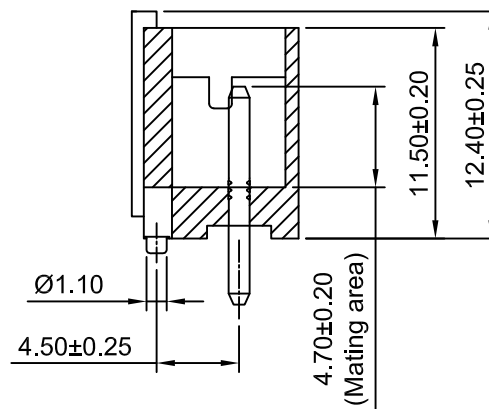
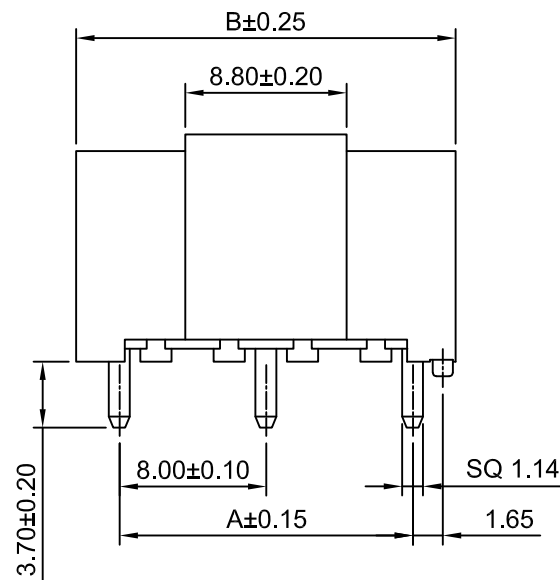
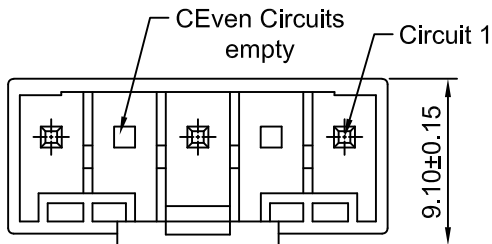


P.C.B LAYOUT
TOLERANCE:±0.05

Ordering Information:

A4001WVG-F-XP-A - ** - ***
1 2 3

1.Part NO.

2.Style:

(Blank): Type A (Blue)

B1: Type B (Yellow)

C1: Type C (Red)

3.Finish:

(Blank): Tin over Nickel

G: Gold over Nickel

G3: Gold over Nickel(Au:3u"Mating area)

G15: Gold over Nickel(Au:15u"Mating area)

G30: Gold over Nickel(Au:30u"Mating area)

SPECIFICATIONS:

Current Rating: 12A AC,DC

Voltage Rating: 300V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 20mΩ Max.

Insulation Resistance: 1000MΩ Min.

Withstanding Voltage: 1500V AC/minute

Pin Material: Brass

Material: PBT,UL94V-0

Ordering Information & Dimensions

Part NO.	Dimensions(mm)	
	A	B
A4001WVG-F-3P-A	8.00	12.70
A4001WVG-F-5P-A	16.00	20.70

CJTconn CHANGJIANG CONNECTORS CO.,LTD.				
Unit	Scale	Sheet	TITLE 8.00mm PITCH VERTICAL WAFER	
mm	2.5:1	1 of 1		
DRWN	CHK'D	APPR		
Wenmin Luo	DianKui Wan	Jack Yin		
General Tolerances	THIRD ANGLE PROJECTION		DRAWING NO.	
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°				
			A4001WVG-F-XP-A	REV A0

A0	NEW RELEASE	2020.07.01
REV	DESCRIPTION	DATE