
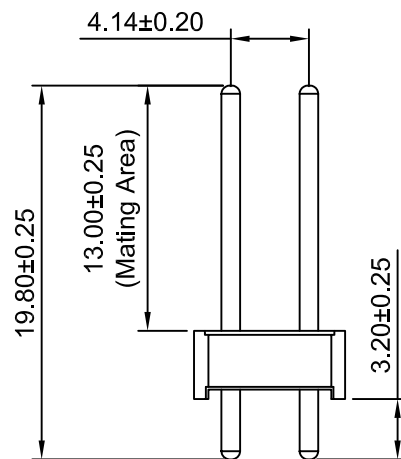

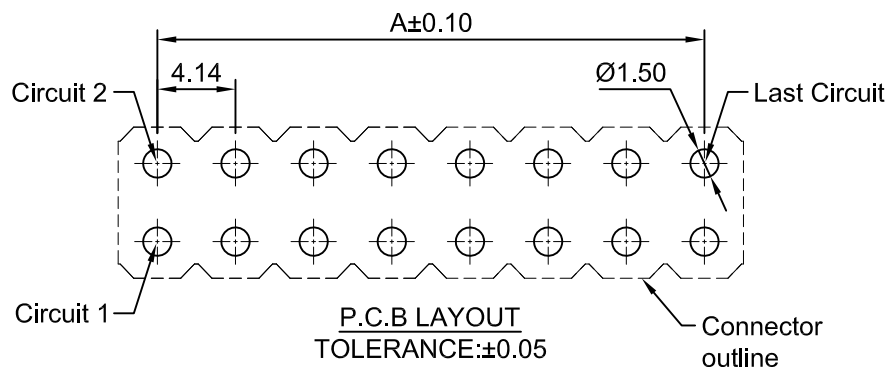
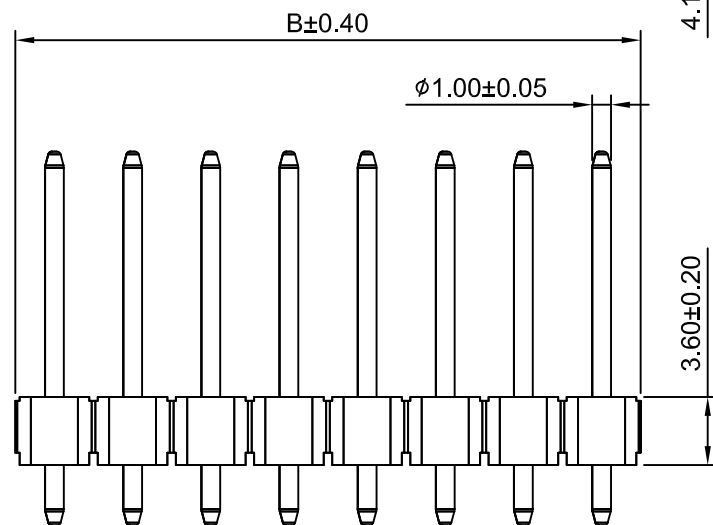


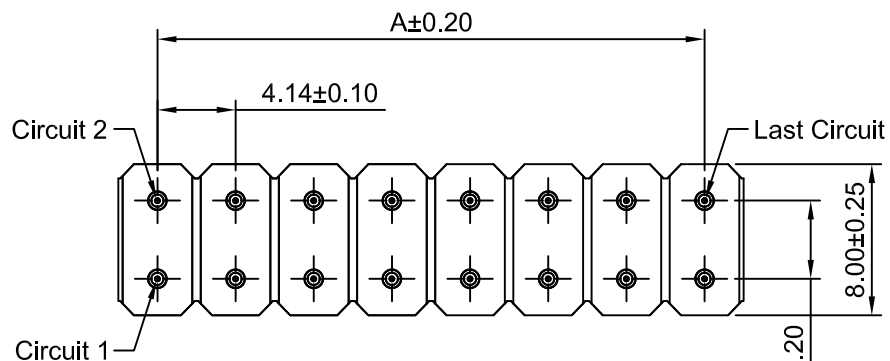

Ordering Information:

A4140WVF-2xXP - ***
1 2

1.Part NO.

2.Finish:

(Blank): Matte Tin over Nickel(Sn:200u",Ni:30u" Min.)

G: Gold over Nickel (Au:1u")

G10: Gold over Nickel (Au:10u",Mating Area)

SPECIFICATIONS:

Current Rating: 10A AC,DC

Voltage Rating: 600V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 20mΩ Max.

Insulation Resistance: 1000MΩ Min.

Withstanding Voltage: 1500V AC/minute

Pin Material: Brass

Material: Nylon 6T,UL94V-0(Black)

Ordering Information & Dimensions

Part NO.	Dimensions(mm)	
	A	B
A4140WVF-2x1P	---	4.14
A4140WVF-2x2P	4.14	8.28
A4140WVF-2x3P	8.28	12.42
A4140WVF-2x4P	12.42	16.56
A4140WVF-2x5P	16.56	20.70
A4140WVF-2x6P	20.70	24.84
A4140WVF-2x7P	24.84	28.98
A4140WVF-2x8P	28.98	33.12
A4140WVF-2x9P	33.12	37.26
A4140WVF-2x10P	37.26	41.40
A4140WVF-2x11P	41.40	45.54
A4140WVF-2x12P	45.54	49.68

CJTconn CHANGJIANG CONNECTORS CO.,LTD.			
Unit	Scale	Sheet	TITLE
mm	2.5:1	1 of 2	4.14mm PITCH VERTICAL WAFER
DRAWN	CHK'D	APPR	
Wenmin Luo	DianKui Wan	Jack Yin	
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO.
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°			A4140WVF-2xXP
A0	NEW RELEASE	2022.07.06	
REV	DESCRIPTION	DATE	REV A0