

Ordering Information:

A5001HB-XP - $\frac{***}{1} - \frac{***}{2} - \frac{***}{3}$

1.Part NO.

2.Material:

(Blank): Nylon 66,UL94V-0(Natural)

GWT: Nylon 66,UL94V-0(Beige),IEC



60335-1,5th Edition Glow Wire Capable.

3.Color:


(Blank):see section 2 material

RD: Red


BL: Blue

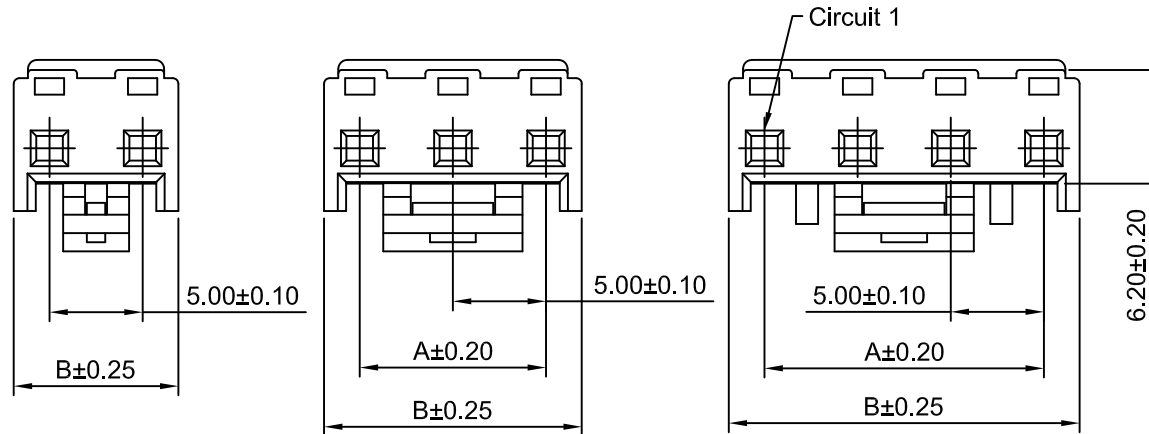


2P



3P

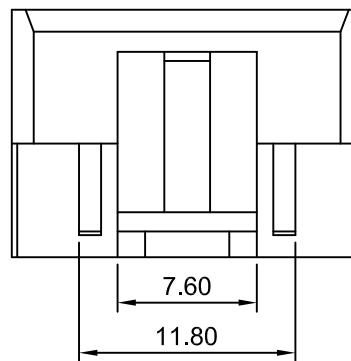

4P



SPECIFICATIONS:

Current Rating: 10A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1500V AC/minute

Ordering Information & Dimensions

Part NO.	Dimensions(mm)	
	A	B
A5001HB-2P	5.00	8.98
A5001HB-3P	10.00	14.06
A5001HB-4P	15.00	19.14

CJTconn CHANGJIANG CONNECTORS CO.,LTD.			
Unit	Scale	Sheet	TITLE
mm	2.5:1	1 of 1	5.00mm PITCH
DRAWN	CHKD	APPR	HOUSING
Wenmin Luo	Djankui Wan	Jack Yin	
General Tolerances			THIRD ANGLE PROJECTION
A1	CHANGE THE DRAWING	2022.05.11	DRAWING NO. A5001HB-XP
A0	NEW RELEASE	2018.06.30	
REV	DESCRIPTION	DATE	
x,xx±0.25 x,xxx±0.20 x,xxxx±0.15 ANGLES ±1°			REV A1