

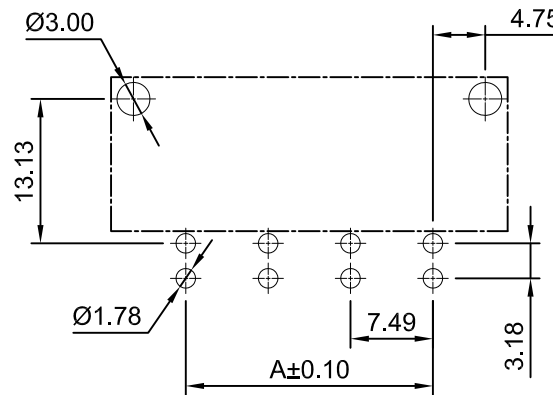
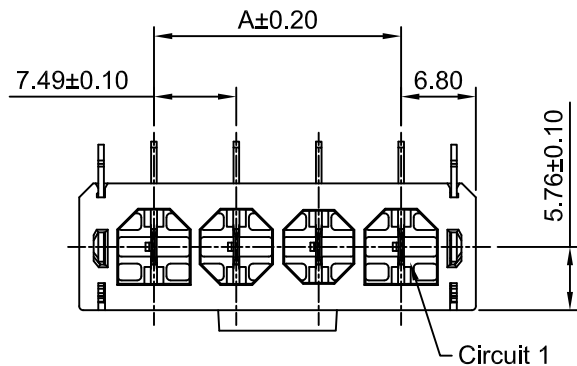


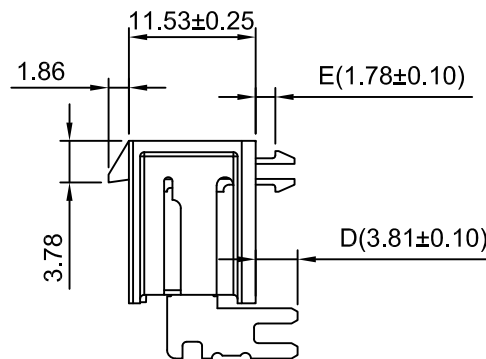


P.C.B LAYOUT

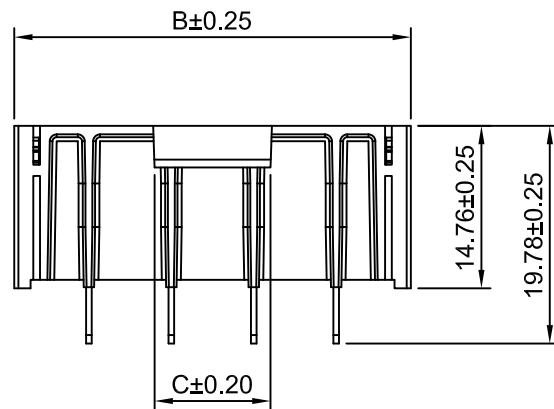

Ordering Information:
A7501WRB-F-XP - $\frac{**}{1}$ - $\frac{***}{2}$ - $\frac{***}{3}$

- 1.Part No.
- 2.Size D:
(Blank): D=3.81mm
D53: D=5.33mm
- 3.Size E:
(Blank): E=1.78mm(D38)
E26: E=2.59mm(D38,D53)
E34: E=3.38mm(D53)

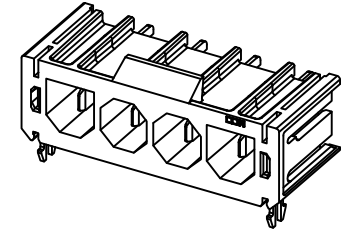

SPECIFICATIONS:

Current Rating: 18A AC,DC
Voltage Rating: 600V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 10mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 1500V AC/minute
Pin Material: Brass/Tin over Nickel
Solder Tabs:Brass/Gold over Nickel
Material:LCP,UL94V-0(Black)

Ordering Information & Dimensions

Circuits	Dimensions(mm)			Circuits	Dimensions(mm)		
	A	B	C		A	B	C
2P	7.49	21.08	3.05	5P	29.96	43.56	10.54
3P	14.98	28.58	3.05	6P	37.45	51.05	10.54
4P	22.47	36.07	10.54	8P	44.94	66.04	10.54

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet
mm	1.5:1	1 of 1
Draw By:		Approved :
Dengchun Yi		Jack Yin

Title :

7.49mm Pitch

90° Wafer

General Tolerance

PROJECT

DRAW NO : A7501WRB-F-XP

REV
A0

A0	NEW RELEASE	2019.12.17
REV	DESCRIPTION	DATE

x.x±0.25
x.xx±0.20
x.xxx±0.15