

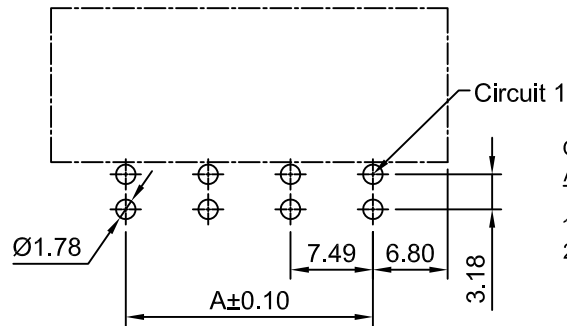
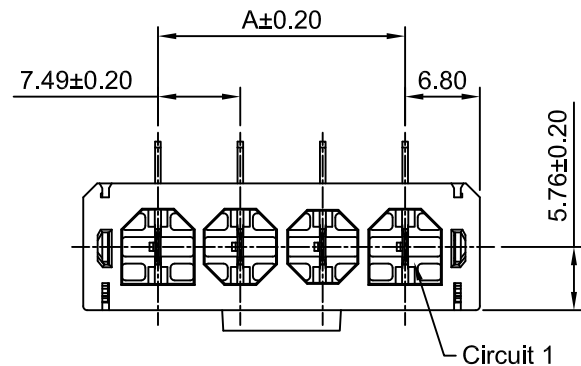



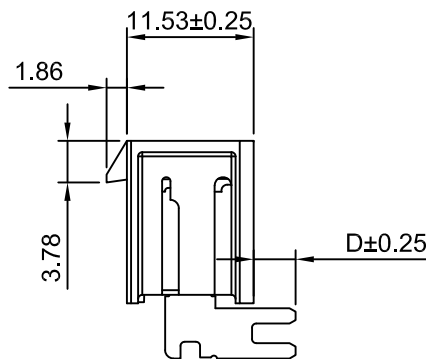

P.C.B LAYOUT (TOP VIEW)
TOLERANCE: ±0.05

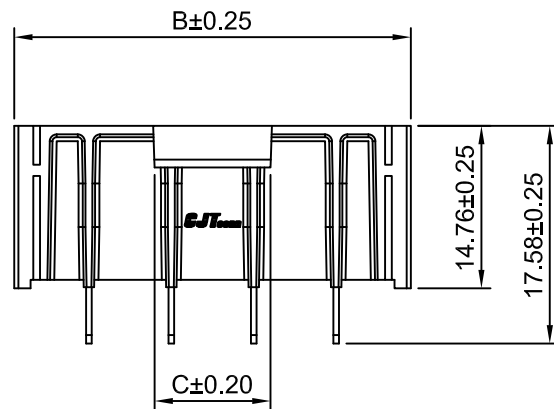

Ordering Information:

A7501WRB-XP - **
1 2

1. Part No.

2. Size D:

(Blank): D=3.81mm

D53: D=5.33mm

SPECIFICATIONS:

Current Rating: 18A AC,DC

Voltage Rating: 600V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1500V AC/minute

Pin Material: Brass/Tin over Nickel

Solder Tabs: Brass/Gold over Nickel

Material: LCP, UL94V-0 (Black)

Ordering Information & Dimensions

Circuits	Dimensions (mm)			Circuits	Dimensions (mm)		
	A	B	C		A	B	C
2P	7.49	21.08	3.05	5P	29.96	43.56	10.54
3P	14.98	28.58	3.05	6P	37.45	51.05	10.54
4P	22.47	36.07	10.54	8P	44.94	66.04	10.54

CJTconn

CHANGJIANG CONNECTORS CO., LTD.

Unit		Scale		Sheet		TITLE	
mm		1.5:1		1 of 1			
DRWN		CHK'D		APPR			
Chengbiao Ye		Diankui Wan		Jack Yin		7.49MM PITCH RIGHT-ANGLE WAFER	
General Tolerances		THIRD ANGLE PROJECTION		DRAWING NO.			
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°							
A7501WRB-XP							

A2	CHANGE THE DRAWING	2023.04.04
A1	CHANGE THE DRAWING	2021.04.02
A0	NEW RELEASE	2019.12.17
REV	DESCRIPTION	DATE